



Technical Support

If you need technical support with your Boss Audio product or have questions about its use, please contact us:

800.999.1236 www.BossAudio.com

Due to ongoing product development, specifications are subject to change without notice.

Congratulations on your purchase of the Boss Audio Subwoofer.
Boss Audio takes great pride in producing products that look great, sound great, and stand up to the daily rigors applied by audio enthusiasts around the world.





P129DC 12" Subwoofer

Dual 4 Ω Voice Coils

2600 W Peak Power Handling

Stitched Rubber Surround




Enclosures

The P129DC will work in both sealed and ported enclosures.

Below you will find the dimensions to make the enclosure to suit the subwoofers needs, it has been designed for maximum output while retaining great sound quality.

The dimensions have already accounted for the volume displacement of the subwoofer, and using 3/4" (19mm) MDF.
All dimensions are external.


Enclosure Dimensions



Sealed Dimensions:

Height (H): 14" (356 mm) Depth (D): 10" (254 mm) Width (W): 14" (356 mm)

Cutout Diameter: 11-1/8" (283 mm)



Ported Dimensions:

Height (H): 14" (356 mm)

Depth (D): 12" (305 mm)

Width (W): 26" (660 mm)

Slot Port Height: 12.5" (318 mm)

Slot Port Length: 30" (762 mm)


Slot Width: 1.5" (30 mm)

Slot Port Extension: 16.25" (413 mm)


Tuning Freq: 35 Hz



Wiring your Subwoofer

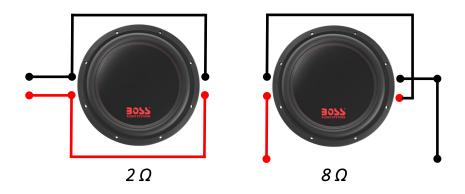

Multiple Subwoofers





Product Specifications

Impedance	Dual 4 Ω
Resonant Frequency	28 Hz
Qts	0.37
Qms	2.31
Oes	0.44

Vas 2.44 ft³ (69.3 liters)

Xmax12 mmSensitivity (1 W/1 m)88 dBPeak Power Handling2600 W

Mounting Depth 5-1/2" (141 mm)
Cutout Diameter 11-1/8" (283 mm)