

# NICOR® | select

Driverless Surface Mount **LED** Downlight  
**DSK Select**



4" & 5/6"  
CCT Selectable  
3K 4K 5K

**Selection to Fit Your Application**



# DSK Select

## Driverless Surface Mount **LED** Downlight

### Affordable CCT Selection with a Slim Profile

Now part of the NICOR Select line, the DSK Driverless Surface Mount LED Downlight is the thinnest installation solution that also offers the ability to adjust the CCT to 3000K, 4000K or 5000K. The ultra slim, driverless technology allows this fixture to fasten to almost any 4" pancake, non-metallic or 4/O junction box eliminating the need for recessed housing. Simplify your installations using a single fixture that can be adjusted on the fly with NICOR Select.




#### Mounting Plate

Separate mounting plate with keyhole slots makes for quick and easy installation



#### Stamped Metal Body

Provides excellent heat management with a clean aesthetic

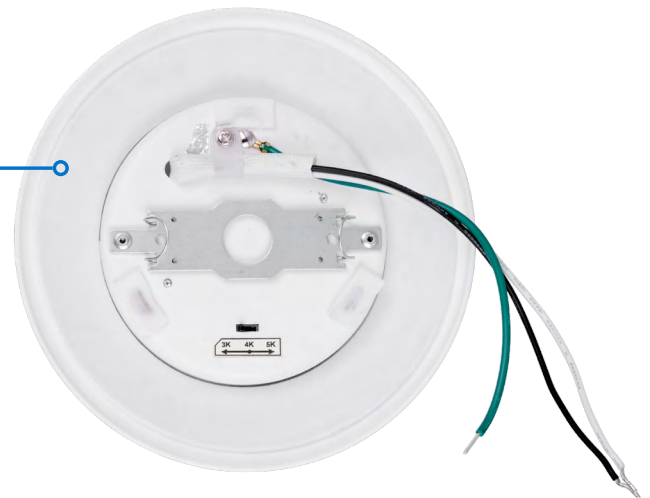

#### Selectable CCT

CCT Selection is directly on the back of the fixture for easy selection during installation

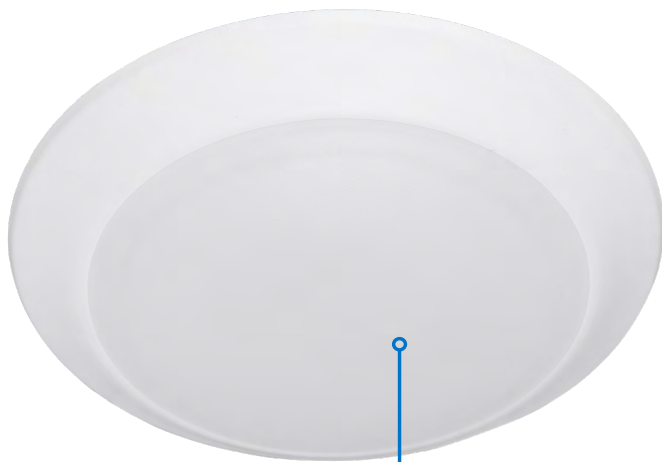

#### 4-Step MacAdams LED

Tight LED binning for color consistency across all three CCT selections

# DSK Select

## Product Information

### Construction

- Stamped steel body on 6" and Aluminum on 4"
- Fully captured diffuser
- Integrated spring lock mounting system
- Low profile micro-switch for CCT selection fits slim pancake wiring box

### Optical System

- Molded polymer, UV stabilized diffuser maximizes light output.
- Convex diffuser creates uniform light distribution while reducing glare

### Electrical

- Input voltage of 120VAC, 60Hz
- Dimmable to 5% with compatible leading edge (TRIAC) and trailing edge (ELV) dimmers
- Dual emitter array enables CCT selection
- CCT Selectable at 3000K, 4000K, or 5000K
- Binned within 4-step MacAdams with  $duv < \pm 0.003$
- TM-21 Reported L70(9K) hours >54,000
- Utilizes high performing LEDs with 90+ CRI and an R9 > 50

### Finish

- Matte white powder coat finish



### Installation

- Easy installation in any 4" pancake, 4" non-metallic or 4/O junction box
- Separate mounting plate with keyhole slots for quick installation to junction boxes
- Fixture easily snaps into place on mounting plate
- Suitable for use in closets : Compliant with NFPA® 70, NEC® Section 410.16 (A)(3) and 410.16 (C)(5)
- Suitable for wet locations
- Operating temperature of 0° to 120°F (-18°C to 49°C)



### Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)

#### DSK4

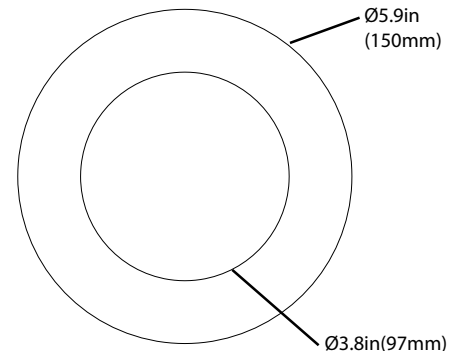

#### DSK56

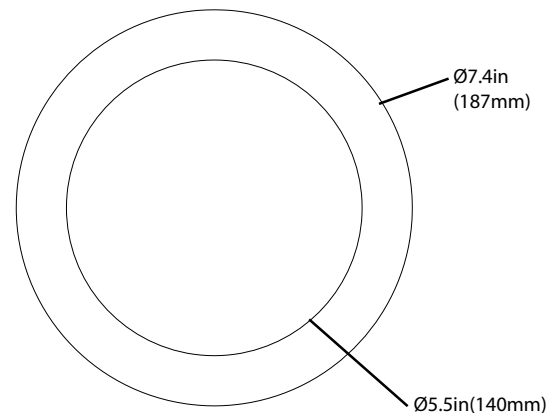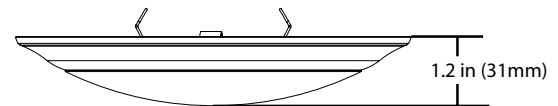

Performance Data			
Model Number	Lumens	Watts	Lumens/Watt
DSK43120SWH (3000K)	657	9.1	72.2
DSK43120SWH (4000K)	744	9.4	79.1
DSK43120SWH (5000K)	662	9.0	73.6
DSK563120SWH (3000K)	811	12.1	67.0
DSK563120SWH (4000K)	948	12.9	73.5
DSK563120SWH (5000K)	823	12.2	67.5

Ordering Information				
Series	Version	Voltage	CCT	Trim Color
DSK4	3	120	S (Selectable: 3000, 4000, 5000K)	WH (White)
DSK56				

*Example: DSK563120SWH*

## Warehouse Locations

Albuquerque, NM  
Atlanta, GA  
Detroit, MI  
Houston TX  
Indianapolis, IN

Lombard, IL  
Miami, FL  
Syracuse, NY  
Van Nuys, CA

**T 800.821.6283**

F 800.892.8393

[www.nicorlighting.com](http://www.nicorlighting.com)

2200 Midtown Pl. NE  
Albuquerque, NM 87107 USA



LIT-DSK-SELCECT  
20190702

©2019 NICOR® • ALL RIGHTS RESERVED



**NICOR**® | select