

# USER'S MANUAL

MC450

ALL-TERRAIN SPEAKER AND AMPLIFIER SYSTEM

**BOSS**<sup>®</sup>  
AUDIO SYSTEMS

BOSS Audio Systems

3451 Lunar Court • Oxnard, CA 93030

[www.bossaudio.com](http://www.bossaudio.com) | 805.751.4853

tech support: [www.bossaudio.com/technical-support](http://www.bossaudio.com/technical-support)



0415

iPod® / iPhone® are trademarks of Apple, Inc. registered in the U.S. and other countries.  
BOSS Audio Systems is not affiliated with Apple, Inc.

# USER'S MANUAL

MC450

ALL-TERRAIN SPEAKER AND  
AMPLIFIER SYSTEM



**BOSS**<sup>®</sup>  
AUDIO SYSTEMS

252 mm

190 mm



## MC450 Motorcycle/UTV Amplified Speaker System

### Specifications

Operation Voltage	-----10 ~ 16 V
Max Power	-----1000W
THD	-----<0.1%
S/N	----->85 dB
Channel Separation	----->50 dB
Frequency Response	----- 80 Hz - 15 KHz
Sensitivity	-----150 mv -1v
Speaker Wires	----- 4.9'
Volume Control Wire	----- 5.9'
Power Cable	----- 8.2'

## MC450 Motorcycle/UTV Amplified Speaker System

### Contents

Amplifier	----- 1 PC
High-Performance, Weatherproof Speakers	----- 4 PCS
Amplifier Mounting Screws	----- 4 PCS
Mounting Hardware	----- 4 PCS
Rubber Mounting Shims	----- 8 PCS
Amplifier Mounting Hardware	----- 8 PCS
Fuse	----- 1 PC
User's manual	----- 1 PC

### Features:

RCA & 3.5mm Audio Inputs

Speaker Clamp Mounts


Weatherproof Volume Control

High-Impact, High Temp Speaker Enclosures

Weatherproof Speakers

## MC450 Motorcycle/UTV Amplified Speaker System

### Connections

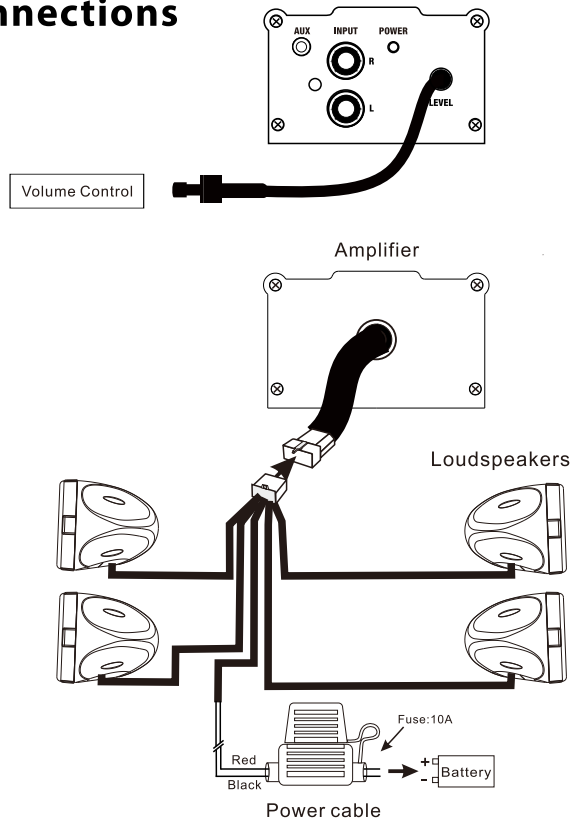


### Amplifier and Loudspeaker Mounting

#### Install Reminder

The components and wiring should not be installed around any moving parts, keep away from ignition parts, fuel lines, or any hot exhaust

Speakers should not be installed where they might inhibit safety features on the vehicle (i.e. lights, horns, brake levers, etc...)



## MC450 Motorcycle/UTV Amplified Speaker System

### Installation

1. Screw the brackets to the bottom of the speakers.
2. Find a safe, ideal mounting location and fit the brackets over the chosen mounting bars.
3. Fasten the mounting screws after you review the safety of the mounting location.

### Wiring

1. Be sure to run the wiring securely and far away from any moving components.
2. Connecting the power cable to the power source: You will need to connect the 12V red wire to a (fused 10 A) switched power source.
3. Use the 3.5mm stereo jack to connect to your entertainment source(MP3 player, etc).
4. Use your player device and wired remote volume controller to control your level of loudness.