

SANDWICH / SALAD STATIONS

MODEL: MVR29SHC MVR48SHC MVR60SHC MVR72SHC



MVR29SHC



MVR48SHC



MVR60SHC



MVR72SHC


Maxx Cold V-Series Sandwich and Salad Stations allow for easy accessibility, optimum storage capacity and flexibility for quick and easy food preparation. Choose from 4 models offering storage from 7, 12, 15.5 and 18 cubic feet that accommodate 8, 12, 16 and 18 pans. Constructed of stainless steel, easy grip recessed handles, LED temperature display and equipped with a cutting board our Sandwich and Salad Stations will streamline your food prep operations.

FEATURES AND CONSTRUCTION

- Stainless steel exterior and powder coated aluminum interior construction
- Easy to grip recessed door handles
- Adjustable heavy-duty wire shelves (1 per section/door)
- Equipped with four (4) 3" swivel casters (two with brakes)
- Equipped with full set of clip-on divider bars and 4" deep plastic pans
- Equipped with 11.42" deep polyethylene cutting board
- Solid state digital control system
- LED temperature display
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Urethane foam insulated walls and doors
- Accommodates full-size sheet pans

ELECTRIC

115V / 60Hz / 1Ph
 (230V / 50-60Hz / 1Ph is available as an option)
 6' (2m) NEMA 5-15P cord set included



NEMA 5-15P

3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 7



Intertek

Certified to ANSI UL 471



Zero Ozone Depletion Potential



DOE 2017 Compliant

MAXX COLD WARRANTY (USA / CANADA)

Contact Maxx Cold for warranty statement at
 TechnicalServices@TheLegacyCompanies.com or 877.368.2797


NET STORAGE CAPACITY (Cu Ft & 1/6 Pans)

MVR29SHC	7.2 Cu Ft (198 L) / 8 Pans
MVR48SHC	13.2 Cu Ft (340 L) / 12 Pans
MVR60SHC	17.3 Cu Ft (439 L) / 16 Pans
MVR72SHC	20.5 Cu Ft (580 L) / 18 Pans

TEMPERATURE

Holding temperature 33°F to 40°F (1°C to 4°C)

- Solid-state controls and forced-air system deliver consistent, easily adjustable temperature performance

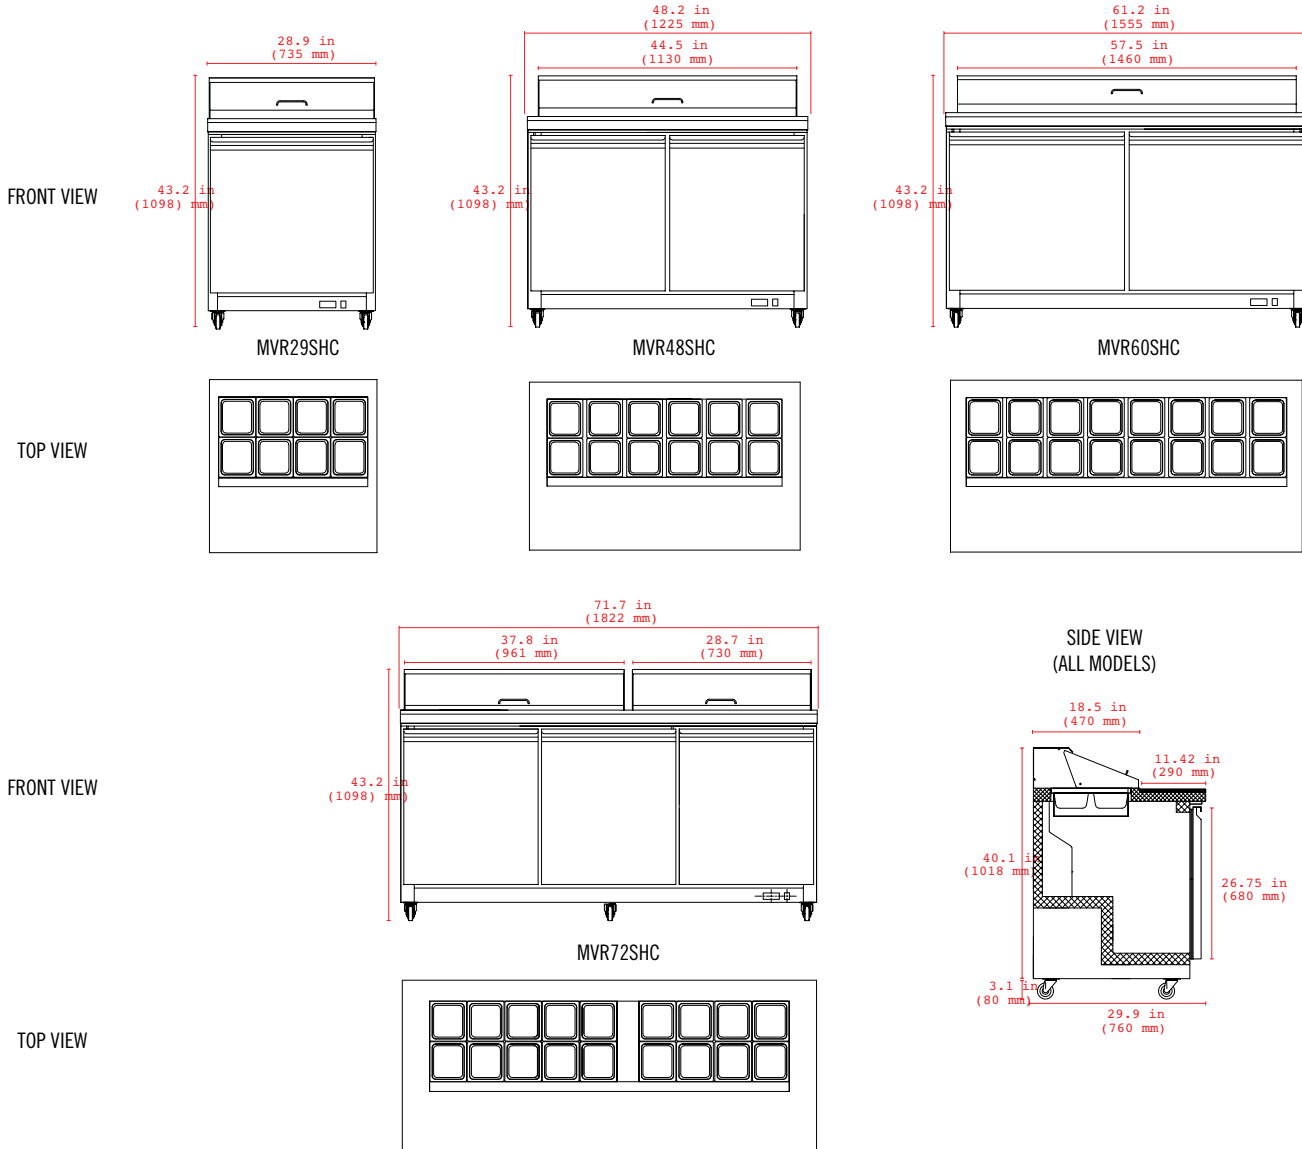

MODEL	EXTERNAL DIMENSIONS	INTERNAL DIMENSIONS	NET CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	SHIPPING WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS / SHELVES	PANS (1/6)	ELECTRICAL
MVR29SHC	29" x 31.5" x 45" (737 x 800 x 1143 mm)	22.9" x 18.8" x 24.5" (602 x 478 x 622 mm)	7.2 Cu Ft (204 L)	33°F to 40°F (1°C to 4°C)	2.9A	150 lbs (68 kg)	R290a 1.59 oz (45 g)	1 / 1	8	115V / 60Hz / 1Ph
MVR48SHC	48.2" x 31.5" x 45" (1224 x 800 x 1143 mm)	43.5" x 18.8" x 24.5" (1104 x 478 x 622 mm)	13.2 Cu Ft (374 L)	33°F to 40°F (1°C to 4°C)	3.4A	194 lbs (88 kg)	R-290a 2.29 oz (65 g)	2 / 2	12	115V / 60Hz / 1Ph
MVR60SHC	61.2" x 31.5" x 45" (1555 x 800 x 1143 mm)	56.2" x 18.8" x 24.5" (1428 x 478 x 622 mm)	17.3 Cu Ft (490 L)	33°F to 40°F (1°C to 4°C)	3.5A	220 lbs (100 kg)	R-290a 2.29 oz (65 g)	2 / 2	16	115V / 60Hz / 1Ph
MVR72SHC	72" x 31.5" x 45" (1822 x 800 x 1143 mm)	66.9" x 18.8" x 24.5" (1700 x 478 x 622 mm)	20.5 Cu Ft (580 L)	33°F to 40°F (1°C to 4°C)	3.9A	317 lbs (143 kg)	R-290a 3.35 oz (95 g)	3 / 3	18	115V / 60Hz / 1Ph

INSTALLATION

- Shorter castor options are available to lower the overall height of the unit to satisfy ADA or other low profile requirements