


# 14 INCH FLUSH MOUNT

## IMPORTANT SAFETY INSTRUCTIONS AND INSTALLATION GUIDE



**READ BEFORE INSTALLATION**  
SAVE THESE INSTRUCTIONS

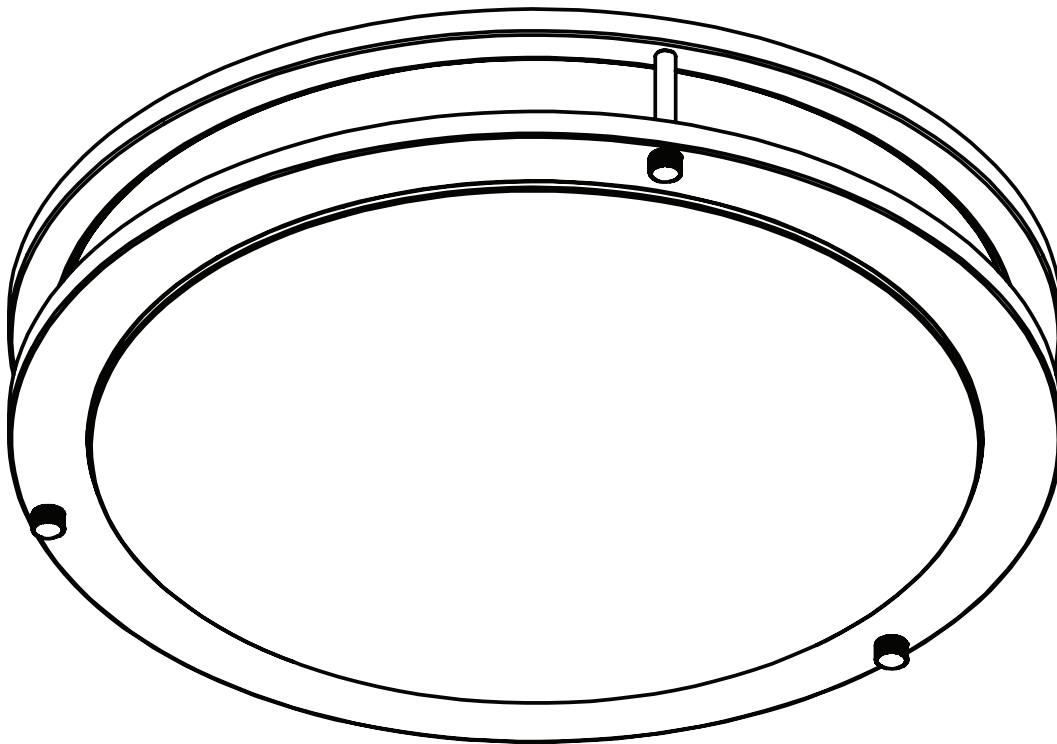

REV011525

We appreciate the trust and confidence you have placed in Feit Electric through the purchase of this product. We strive to continually create quality products designed to enhance your home. Visit us online to see our full line of products available for your home improvement needs. Thank you for choosing Feit Electric.

# Table of Contents

Safety Information .....	2
FCC Statement .....	2
Warranty .....	2
Pre-Installation .....	3
Tool Required .....	3
Hardware Included .....	3
Color Settings .....	3
Installation .....	4

## Safety Information

For your safety, always remember to:

- ☐ Turn off the power supply at the fuse or circuit breaker box before you install the fixture.
- ☐ Ground the fixture to avoid potential electric shock and to ensure reliable starting.
- ☐ Double-check all connections to be sure they are tight and correct.
- ☐ Wear rubber soled shoes and work on a sturdy wooden ladder.
- ☐ Account for small parts and destroy packing material, as these may be hazardous to children.

This fixture is designed for use in a circuit protected by a fuse or circuit breaker. It is also designed to be installed in accordance with local electrical codes. If you are unsure about your wiring, consult a qualified electrician or local electrical inspector, and check your local electrical code.

### Product Specifications

- 120VAC, 60Hz
- Wall Dimmable
- Suitable for Damp Locations



**CAUTION:** Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.



**CAUTION:** Consult a certified electrician to ensure correct branch circuit conductor.



**WARNING:** RISK OF SHOCK. House electric current can cause painful shock or serious injury unless handled properly.



**CAUTION:** RISK OF FIRE. Before installing your lighting fixture, thoroughly review this installation manual. If you do not have sufficient electrical wiring experience have your fixture installed by a certified electrician. All electrical connections must be in accordance with Local and National Electrical Code (NEC) Standards. Reliable operating temperature is -13°F to 113°F / -25°C to 45°C. Suitable for Damp Locations. For more information including dimmer compatibility visit [www.feit.com](http://www.feit.com).

**NOTICE:** All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a certified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

## FCC STATEMENT

### Supplier's Declaration of Conformity:

47 CFR § 2.1077 Compliance Information

**Responsible Party:** Feit Electric Company

4901 Gregg Road, Pico Rivera, CA 90660, USA

[www.feit.com](http://www.feit.com)

**Unique Identifier:** FM14SAT/6WY/NK


This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: Reorient or relocate the receiving antenna. Increase the separation between the equipment and receiver. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. Consult the dealer or an experienced radio/TV technician for help. Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

## Limited Warranty

This product is warrantied to be free from defects in workmanship and materials for up to 3 years from date of purchase. If the product fails within the warranty period, please contact Feit Electric at [info@feit.com](mailto:info@feit.com), visit [feit.com/contact-us](http://feit.com/contact-us) for instructions on replacement or refund. REPLACEMENT OR REFUND IS YOUR SOLE REMEDY. EXCEPT TO THE EXTENT PROHIBITED BY APPLICABLE LAW, ANY IMPLIED WARRANTIES ARE LIMITED IN DURATION TO THE DURATION OF THIS WARRANTY. LIABILITY FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IS HEREBY EXPRESSLY EXCLUDED. Some states and provinces do not allow the exclusion of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state or province to province.

Pre-Installation

TOOLS REQUIRED (NOT INCLUDED)



Phillips Screwdriver



NOTE: Hardware not shown to actual size.

HARDWARE INCLUDED



AA



BB



CC



DD




EE



FF

Part	Description	Quantity
AA	Fixture Housing	1
BB	Lens	1
CC	Fixture Trim Ring	1
DD	Junction Box Mounting Screws #8-32 x 1 in.	2
EE	Wire Nuts	3
FF	Finials	3

Color Settings

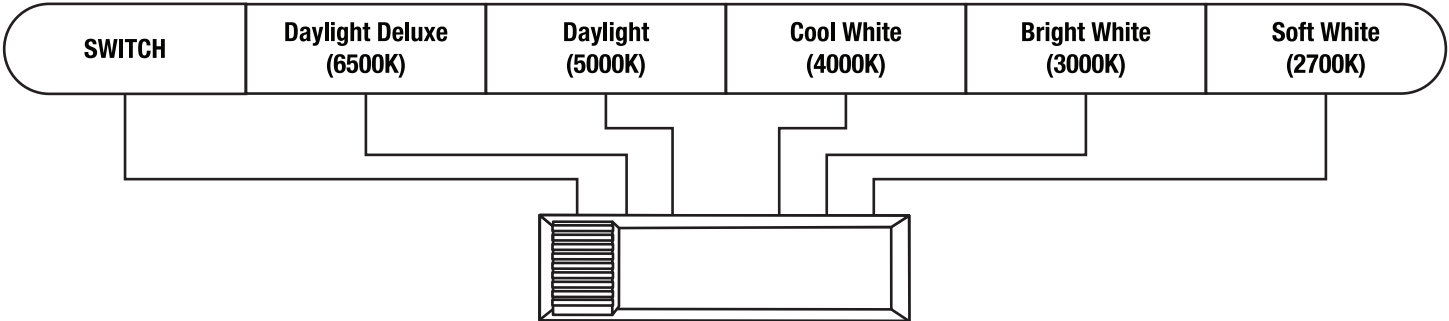

NOTE: The slide switch is located under the lens on the fixture housing. See Installation Step 3 to access the slide switch.

- When the slide switch is set to 2700K, the color temperature is set to Soft White.
- When the slide switch is set to 3000K, the color temperature is set to Bright White.
- When the slide switch is set to 4000K, the color temperature is set to Cool White.
- When the slide switch is set to 5000K, the color temperature is set to Daylight.
- When the slide switch is set to 6500K, the color temperature is set to Daylight Deluxe.
- When the slide switch is set to SWITCH, the color temperature can be changed from 2700K, 3000K, 4000K, 5000K, 6500K with your existing light switch.
- To change color temperatures using your existing light switch:
  - Set the slide switch on the back of the fixture to SWITCH.
  - Toggle your light switch ON and OFF within 0.5-3 seconds to cycle through the 5 different color temperatures.
  - If the fixture is left OFF for over 10 seconds and turned ON, the fixture will remember the last color temperature selected and will display that color when turned on again.
- Reset function is used when operating multiple color selectable lighting products from the same light switch. In the event multiple fixtures are not displaying the same color at the same time, the fixtures must be reset using your existing light switch. Toggle the wall switch ON and OFF seven times (leave the switch in the ON position for five seconds before toggling to OFF).


# Installation

## 1 Turning Off the Power

Turn the power OFF at the switch and fusebox or the circuit breaker.


## 2 Identifying the Wires

Black - Hot/Live  
White - Neutral  
Green or Bare Copper - Ground




## 3 Removing the Fixture Housing

Remove the fixture housing (AA) from the lens by unscrewing the finials (FF). Then carefully remove the Fixture Trim Ring (CC) and the Lens (BB).

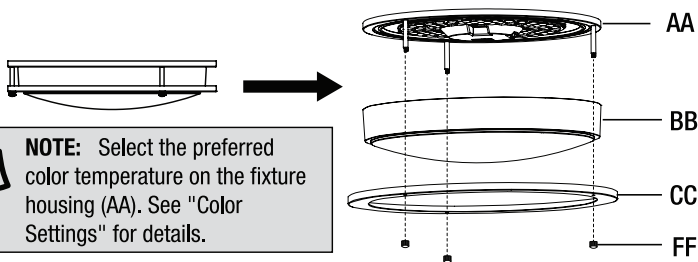


## 4 Securing the Mounting Screws

Insert the Junction Box Mounting Screws (DD) into the Junction Box as shown.

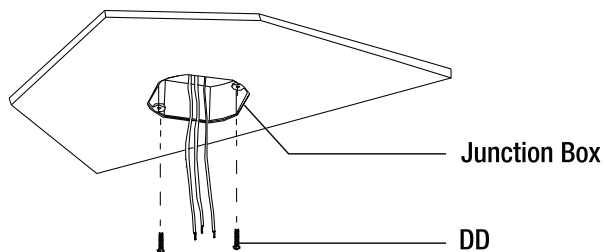


## 5 Connecting the Wires

Use the wire nuts (EE) to connect the wires. Black wire to Hot/Live. White wire to neutral. Green or bare copper wire to ground.

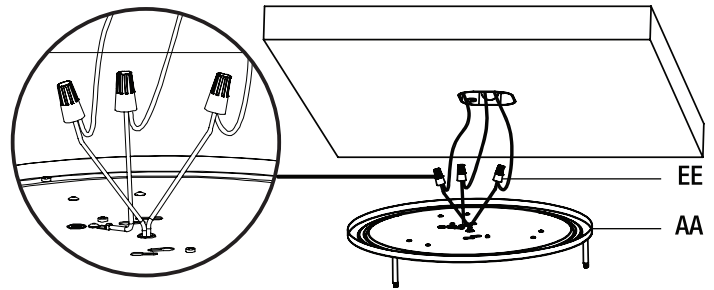


## 6 Installing the Fixture Housing

Position the fixture housing (AA) over junction box aligning slots or keyholes in the fixture with the screws in the junction box. Secure the fixture in place by tightening the mounting screws (DD).

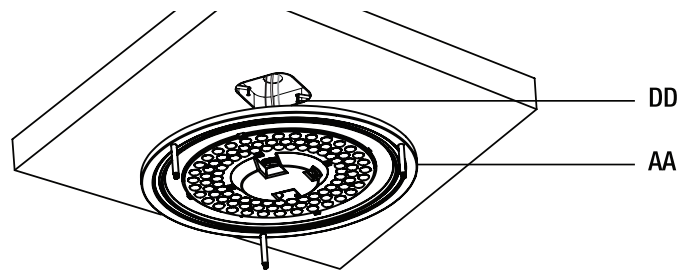

## 7 Installing the Lens

Attach the lens (BB) and the fixture trim ring (CC) by securing the finials (FF).

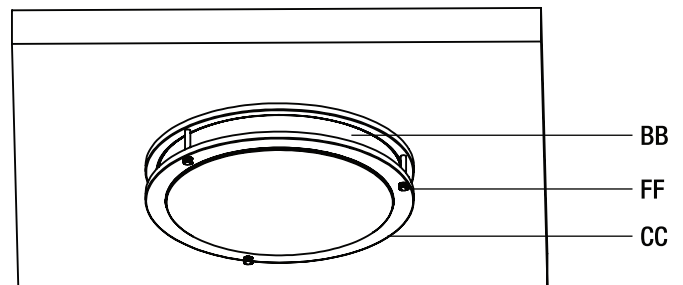

## 8 Turning On the Power

Turn on the fusebox or circuit breaker and the power at the wall switch.

# Need Help?



Thank you for your purchase.  
Questions, comments or feedback?  
We'd love to hear from you.

Visit [feit.com/help](https://feit.com/help) for support or connect with us:



@FeitElectric



@FeitElectricInc



feitelectriclighting