

SentinelPro™ Diverter Trim, Shower and Tub Package (Valve not included)

MODELS:

- SLV-5470: 2.0 GPM (7.6 L/min) Flow Rate Shower Head
- SLV-5470-E15: 1.5 GPM (5.7 L/min) Flow Rate Shower Head

FEATURES:

- CPT-5401: Diverter Shower Valve Trim
- S-2272-E2: 2.0 GPM (7.6 L/min) Flow Rate Shower Head
- S-2272-E15: 1.5 GPM (5.7 L/min) Flow Rate Shower Head
- S-2500: Shower Arm and Flange
- VS-100-PC: 2.5 GPM (9.5 L/min) Hand Held Shower with Pause/Trickle Button
- VS-115: Supply Ell with Wall Flange
- VS-117: Vacuum Breaker
- S-1554: Tub Spout
- CPT-1183: Transfer Valve Trim (Valve not included)
- VS-145 : 69 in. Metal Stainless Steel Hose

VALVE OPTIONS:

- CPV-TP2-DV: Thermostatic/Pressure Balancing Diverter Valve
Sweat & Thread Connections
- CPV-TV: Two-Way Diverter Valve
for use with CPT-1183

STANDARDS:

- ASME A112.18.1/CSA B125.1 certified
- ADA Compliant

STOCK FINISHES:



PC

WARRANTY:


Visit www.speakman.com for full product warranty information

- See Speakman.com For Warranty Information



Information continues on next page

SentinelPro™ Diverter Trim, Shower and Tub Package (Valve not included)

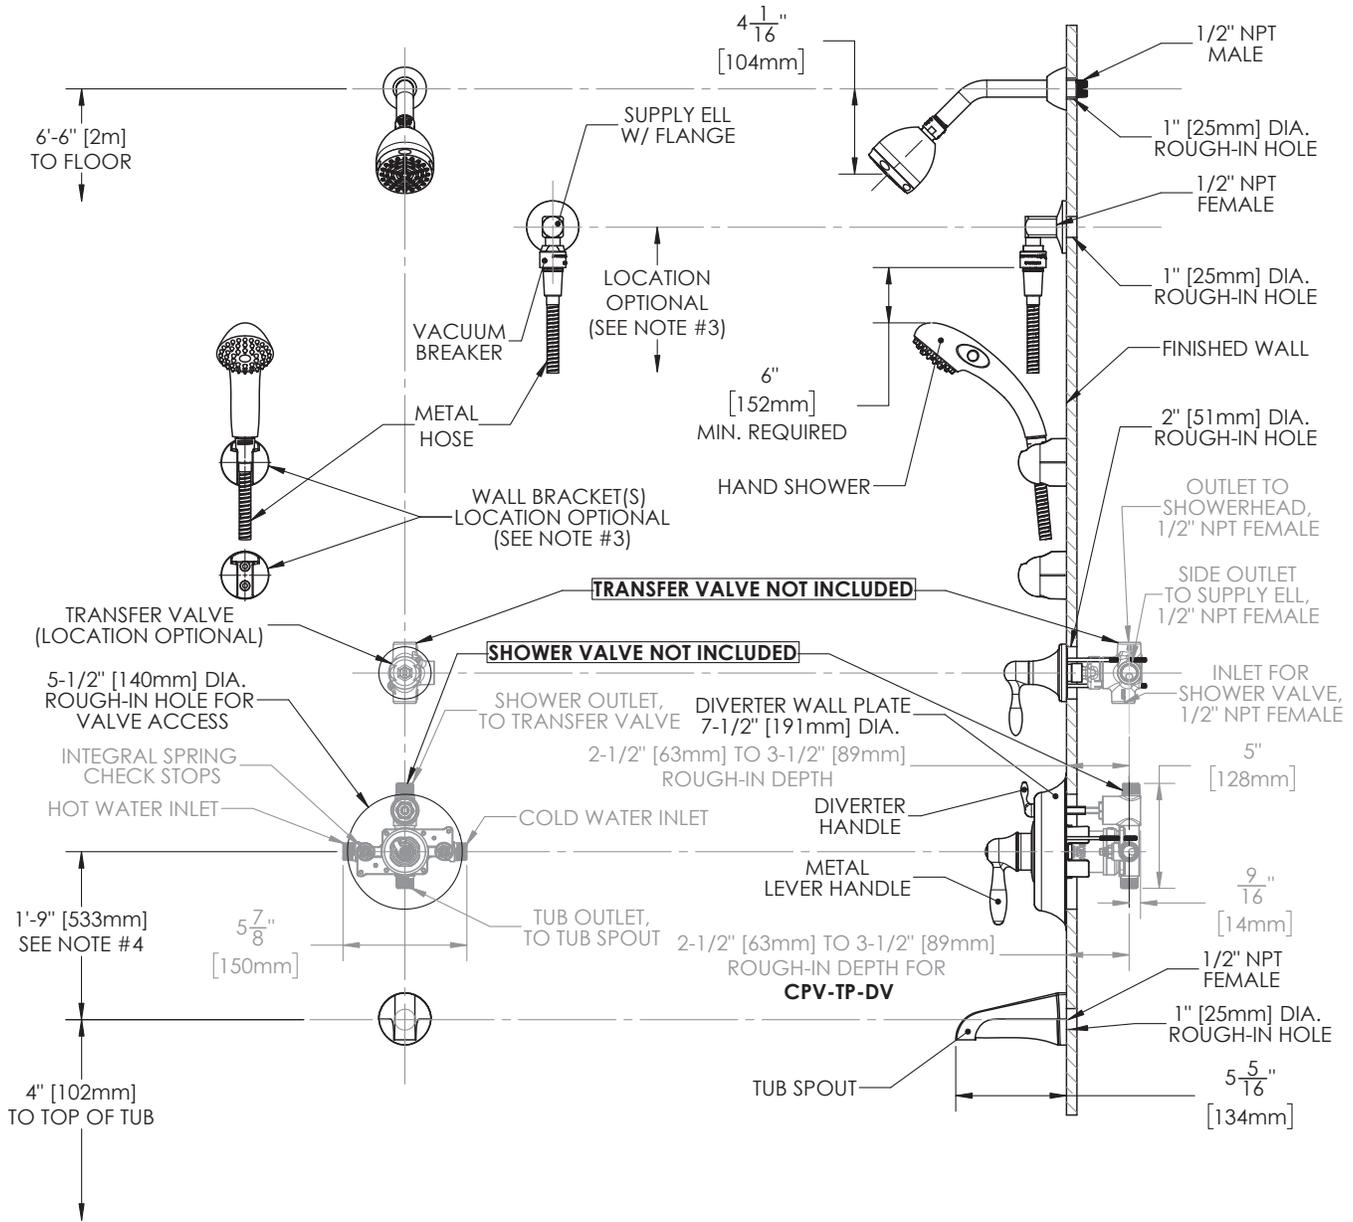

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] UNLESS OTHERWISE SPECIFIED AND ARE SUBJECT TO CHANGE WITHOUT NOTICE.
2. THE LOCATIONS OF THE WALL BRACKETS(2) AND SUPPLY ELL ARE OPTIONAL, BUT RESTRICTED BY THE 69" HOSE LENGTH RUNNING FROM THE SUPPLY ELL CONNECTION TO THE HAND SHOWER AND THE 6" MINIMUM REQUIREMENT BETWEEN THE IN-LINE VACUUM BREAKER AND TOP OF THE HAND SHOWER (HAND SHOWER ADJUSTED TO HIGHEST POSITION).
3. FOR ADA MOUNTING LOCATIONS CONSULT ADAAG, ANSI A117.1, OR STATE REGULATIONS.