



HAND-CRANK BRAKE WINCHES

Elevate your lifting and hoisting capabilities. The CURT brake winch is a compatible replacement for most DL and Fulton winches and features versatile mounting options for seamless integration into any setup."



BUILT TOUGH. BUILT TO LAST.

Versatile mounting



Slotted screw holes offer flexible mounting options, seamlessly integrating into various setups for hassle-free installation

Corrosion resistant




600-hour salt-spray tested zinc plating provides top corrosion resistance in harsh environments

Safety features



Prioritizing user safety, this winch is equipped with a locking lever for increased safety and a comfort grip handle for ergonomic cranking

Durable performance

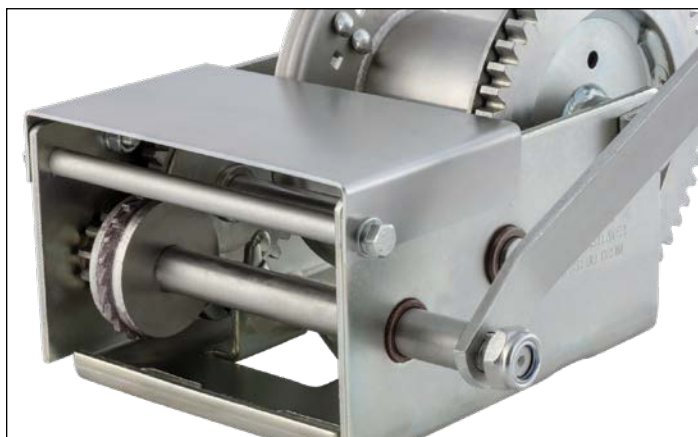

Crafted from high-quality, cold-forged steel and featuring solid gears, this winch ensures reliable performance for lifting and hoisting applications in agricultural, commercial, and industrial settings

Additional Features

- Compatible replacement for most DL and Fulton winches
- Self-activating, automatic brake holds loads securely
- Solid gears provide superior strength vs. laminated gears
- Oil-impregnated metal bushings for smooth operation
- Broached pinion shaft to securely engage the pinion gear
- Comfort grip handle for ergonomic cranking
- Gear cover for added protection against injuries
- Two input shafts and quick-detach handle for varying leverage (# 29610 only)
- Straps and cables not included
- Five-year limited warranty



29610



29615



29625



29460



29461

Part #	Capacity	Hub Diameter	Drum Width	Gear Ratio	Handle Length
29610	1,000 lbs.	2.2"	2.0"	4.2:1	7"
29615	1,500 lbs.	2.5"	2.2"	5:1	10-5/8"
29625	2,500 lbs.	3.3"	3.8"	15.8:1	10-5/8"

Part #	Length	Diameter	Break Strength	Winch Capacity
29460	25'	3/16"	4,200 lbs.	1,800 lbs.
29461	50'	7/32"	5,600 lbs.	2,500 lbs.