

Vulite®

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

4" TC LOW VOLTAGE REMODEL HOUSING

LOW VOLTAGE LAMPS

V4TCRLV W

PRODUCT DESCRIPTION

TC Remodel Housing designed for use in non-insulated areas • If installed where insulation is present, the insulation must be pulled back 3" from all sides of the TC Housing • In Canada, when insulation is present, type IC fixture must be used • TC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below • Secured in place by factory installed remodel springs

PRODUCT SPECIFICATIONS

Lamp One 12V, 50W MR16 lamp.

Socket Ceramic bi-pin socket with aluminum heat shield.

Trims Trim selection shown on reverse.

Transformer 120V to 12V 50VA magnetic transformer mounted to junction box.

Dimming May be dimmed using dimmers specifically designed for low voltage magnetic transformers; consult factory or dimmer manufacturer for additional information.

Labels UL/cUL listed for through-branch wiring, damp locations and IP
 • Product thermally protected against improper use of lamps or insulation
 • UL/cUL Listed • Trim V4041 is wet location approved for covered ceiling applications.

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.



Specifications subject to change without notice.

INSTALLATION

Junction Box Pre-wired junction box provided with removable access plate, (5) 1/2" knockouts, (4) Non-metallic sheathed cable connectors and ground wire
 • Knockouts equipped with pryout slots.

Housing TC housing, 22 gauge aluminum • Remodel springs accommodate up to a 5/8" ceiling thickness.

DIMENSIONS

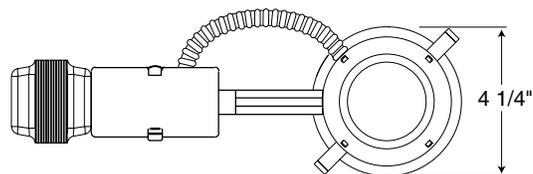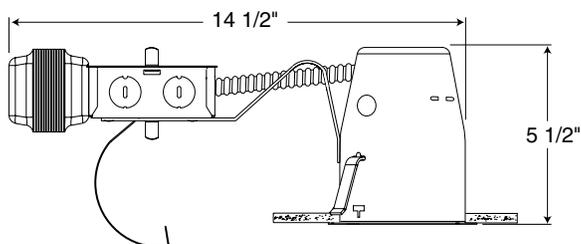

4 3/8" CEILING CUTOUT

ACCESSORIES

Catalog No.	Description
SMPLT4	4" Housing Locator

To order, specify catalog number

PRODUCT CODES

Catalog No.	Input Voltage	Lamp Rating (max.)
V4TCRLV W	120V	12V 50W MR16

4" TC LOW VOLTAGE REMODEL HOUSING

LOW VOLTAGE LAMPS

V4TCRLV W

TRIMS/LAMPS

	Cat. No.	Description	Max. Lamp Rating
	V4044 WWH V4044 BWH	White Baffle with Regressed Gimbal Ring Black Baffle with Regressed Gimbal Ring	50W MR16
	V4047 CWH	Clear Cone with Regressed Gimbal Ring	50W MR16
	V4040 WH	White Gimbal Ring	50W MR16
	V4048 WH	White Eyeball with Baffle	50W MR16
	V4041 WH◆	Stippled Opal Lens Shower	50W MR16

Note: Lamps may be dimmed. Use dimmers specifically designed for low voltage magnetic transformers; consult factory or dimmer manufacturer for additional information.

Trim Size: 5" O.D.

Trim Finish: WH - White.

Note: In Canada when insulation is present, Type IC fixtures must be used.

◆ UL/cUL Listed for use in wet location.