


Jones Stephens' PlumBite® Push to Connect Water Heater Connectors

Job Name	_____
Location	_____
Engineer	_____
Contractor	_____
Tag	_____ PO# _____

Specifications

Jones Stephens' PlumBite® Push to Connect Water Heater Connectors are a heat-free method of joining Copper, CPVC, PE-RT or PEX tubing, designed to save time on installation and to connect piping with relative ease and confidence. No soldering, glue, heat or external tools are required to join the pipe. Just insert the pipe and the stainless steel gripper ring, bite down, and hold the pipe tightly while the EPDM o-ring seals against leakage. Disassembly is just as fast using the optional disassembly tool, so fittings can be easily removed and re-used.

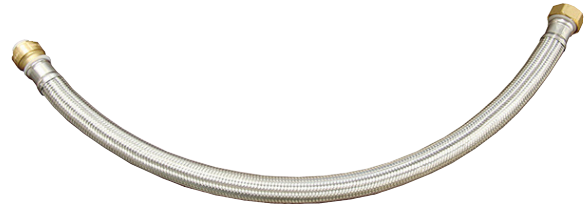

Applications


Jones Stephens' PlumBite® Push to Connect Water Heater Connectors are approved for use with commercial and residential potable and non-potable water applications.

Materials

Gasket- EPDM, Peroxide Cured
Valve Body- Brass

Dimensions and Product Offering

PART NO.	A NOMINAL (IN.)	B NOMINAL (IN.)	C (IN.)	C TOLERANCE +/- (IN.)
C76605LF	0.75 FIP	0.50	12.52	0.39
C76607LF	0.75 FIP	0.50	18.55	0.40
C76608LF	0.75 FIP	0.50	24.53	0.40
C76612LF	0.75 FIP	0.75	12.52	0.39
C76613LF	0.75 FIP	0.75	15.52	0.40
C76614LF	0.75 FIP	0.75	18.55	0.40
C76615LF	0.75 FIP	0.75	24.53	0.40
C77478LF	0.75 FIP	0.75	18.55	0.40
C77479LF	0.75 FIP	0.75	24.53	0.40

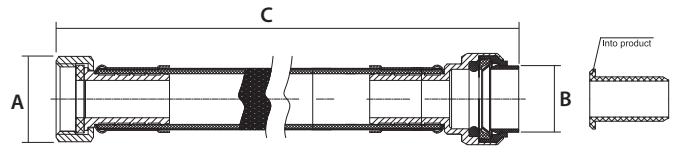

Performance Specifications

Maximum Temperature - 180°F
Maximum Pressure - 200 PSI

Certifications/Listings/Approvals

NSF/ANSI/CAN 61
NSF/ANSI/CAN 372
MASS Approved
SDWA Compliant
Lead Law Compliant
ASME A112.18.6/CSA B125.6

