

BOSS[®]
AUDIO SYSTEMS



BOSS[®]
AUDIO SYSTEMS



MCBK625BA USER'S MANUAL
BLUETOOTH[®] | 3" (76 mm)
WEATHERPROOF 2 SPEAKER SYSTEM
FEATURING BUILT-IN AMPLIFIER



BOSS Audio Systems
3451 Lunar Court • Oxnard, CA 93030
www.bosssaudio.com
805-751-4853 Customer Service
Tech Support: www.bosssaudio.com/support



0120

The Bluetooth[®] word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by BOSS Audio Systems is under license. Other trademarks and trade names are those of their respective owners.

MCBK625BA Motorcycle/UTV Amplified Speaker System

Congratulations on your purchase of a BOSS Audio Systems amplified speaker system.

It has been designed, engineered and manufactured to bring you the highest level of performance and quality, for years of listening pleasure.

Thank you for making BOSS AUDIO SYSTEMS your choice for entertainment!



MCBK625BA Motorcycle/UTV Amplified Speaker System

NOTES

MCBK625BA Motorcycle/UTV Amplified Speaker System

Specifications

Operation Voltage	10~16 V
THD	<0.1%
S/N	>75 dB
Channel Separation	>50 dB
Frequency Response	50Hz - 15KHz
Speaker Wires	5.5'
Volume Control Wire	4.9'
Audio Input Cable	0.8'
Power Cable	5.5'
In-Line Fuse/Power Cable	4.9'
Bracket Size Range	0.75" ~1.25"
Fuse Rating	7.5A

MCBK625BA Motorcycle/UTV Amplified Speaker System

Contents

High-Performance, Weatherproof Speakers	2 PCS
Mounting Hardware	2 PCS
Ruber Mounting Shims	4PCS
Power Plug with Fuse	1 PC
Users Manual	1 PC

Features:

- Aux-In (3.5 mm)
- Speaker Clamp Mounts
- Weatherproof Media Control
- High-Impact, High Temp Speaker Enclosures
- Weatherproof Speakers
- Bluetooth® Audio Streaming

MCBK625BA Motorcycle/UTV Amplified Speaker System

Installation

1. Unscrew the brackets from the bottom of the speakers.
2. Find a safe, ideal mounting location and fit the brackets over the chosen mounting bars.
3. Fasten the mounting screws after you review the safety of the mounting location.

Wiring

- 1) Remove the seat.
- 2) Route the fused power leads to the battery. *(keep away from moving parts and/or hot exhaust)*
- 3) Connect the RED ring terminal to the +12V post of the battery.
- 4) Connect the BLACK ring terminal to ground post of the battery.
- 5) Connect the power connector to the white mating connector leading to the speaker

Bluetooth


To pair and connect your Bluetooth device to the MCBK625BA”

Enter Settings > Bluetooth Menu > Search > “ Boss Audio

MCBK625BA” >If Prompted to enter a passcode enter : “0000”

MCBK625BA Motorcycle/UTV Amplified Speaker System

Connections

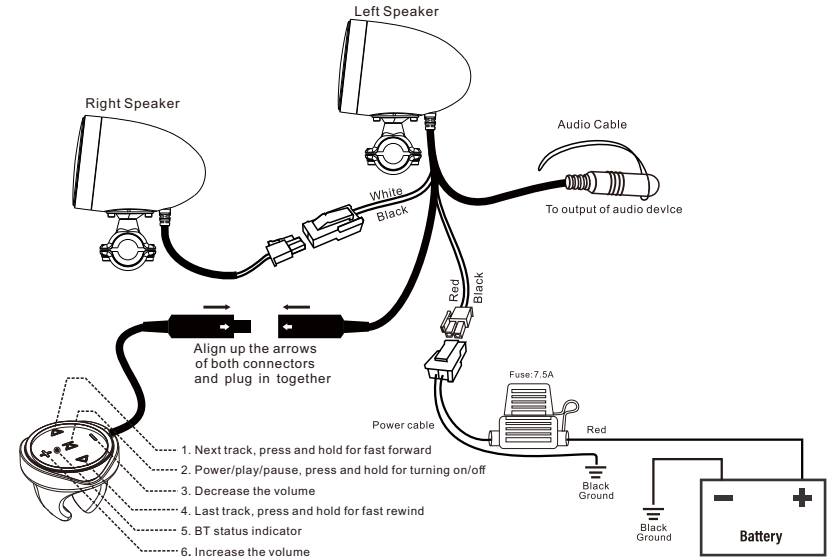

Amplifier and Loudspeaker Mounting

Install Reminder

The components and wiring should not be installed around any moving parts, keep away from ignition parts, fuel lines, or any hot exhaust

Speakers should not be installed where they might inhibit safety features on the vehicle (i.e. lights, horns, brake levers, etc...)

