




Dielectric Union

Solder x Galvanized FIP Connection, 250 PSI

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
701-103G	1/2"	80	10	30
701-104G	3/4"	80	10	37
701-105G	1"	80	10	41
701-106G	1-1/4"	72	6	62
701-107G	1-1/2"	36	6	61
701-108G	2"	20	5	52

- Dezincification Resistant Brass Alloy
- Prevents Accelerated Corrosion
- Buna Seats: -20°F to 180°F
- Wetted Surfaces Contain Less than .25% Lead Content

LEAD FREE

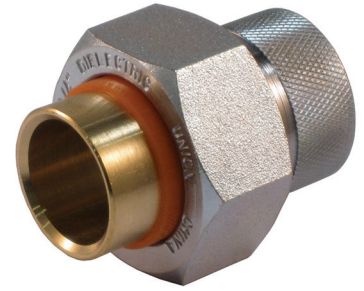


Dielectric Union

Solder x Galvanized MIP Connection, 250 PSI

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
701-304G	3/4"	96	12	61
701-306G	1"	60	10	62

- Dezincification Resistant Brass Alloy
- Prevents Accelerated Corrosion
- Buna Seats: -20°F to 180°F
- Wetted Surfaces Contain Less than .25% Lead Content

LEAD FREE

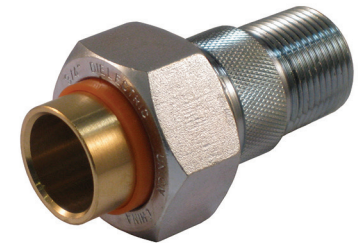

Dielectric Union

FIP x Galvanized FIP Connection, 250 PSI

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
701-503G	1/2"	100	10	52
701-504G	3/4"	60	10	50
701-505G	1"	40	5	53

- Dezincification Resistant Brass Alloy
- Prevents Accelerated Corrosion
- Buna Seats: -20°F to 180°F
- Wetted Surfaces Contain Less than .25% Lead Content

LEAD FREE

