

Features

- Includes mirror defogging
- Dimmable LED task lighting to 1%
- Compatible with most Triac/Phase-cut dimmers
- Energy efficient LED lighting:

Kelvin	3000**
CRI	90+
Lumens* (Approx)	1120
Lux* (Approx)	330
R9 Value*	50+
Foot-candles* (Approx)	31
Watt Output - LED	55w max
Watt Output - LED with defogger on	85w max

* Measured at 18" from center of the mirror

** Starting in Fall 2021, Vitality Lighted Mirrors are being enhanced to 3000K CCT from 2700K CCT. Orders will be fulfilled with 3000K based on existing inventory.

Construction

- Anodized aluminum back frame
- Quality polished edge mirror
- Power cords installed for easy plugin installation
- Constructed for surface mounting
- Includes installation hardware

Codes/Standards Applicable

Vitality Mirror is UL certified to:

- UL 962
- CSA-C22.2, No. 12-82


Dimensions

Diameter: 30" (762 mm)

Depth: 1-3/4" (45 mm)


Electrical System

- 120 Vac 60Hz wall outlet as shown in drawing

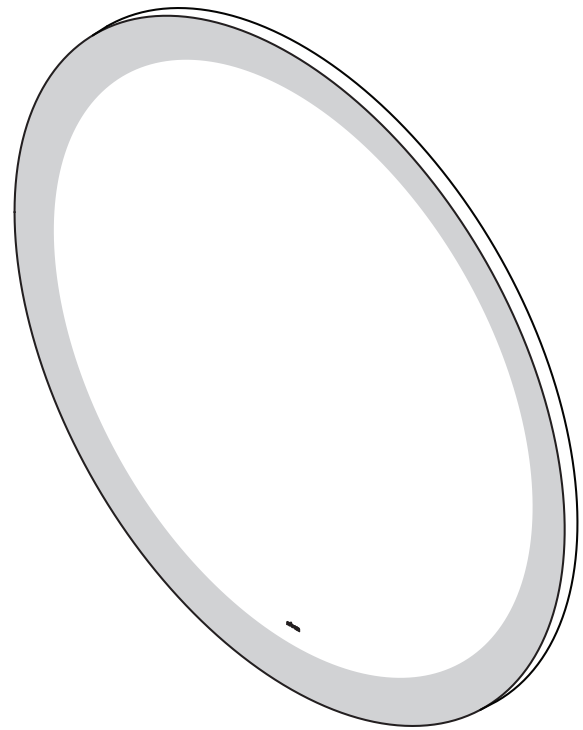

Model Number Key

Vitality	Mirror	Diameter	Shape	Light Pattern	Edge Type	Options	Color Temp
Y	M	0030	C = Circle	P = Perimeter	FP = Flat, Polished	D = Defogger	3 = 3000K

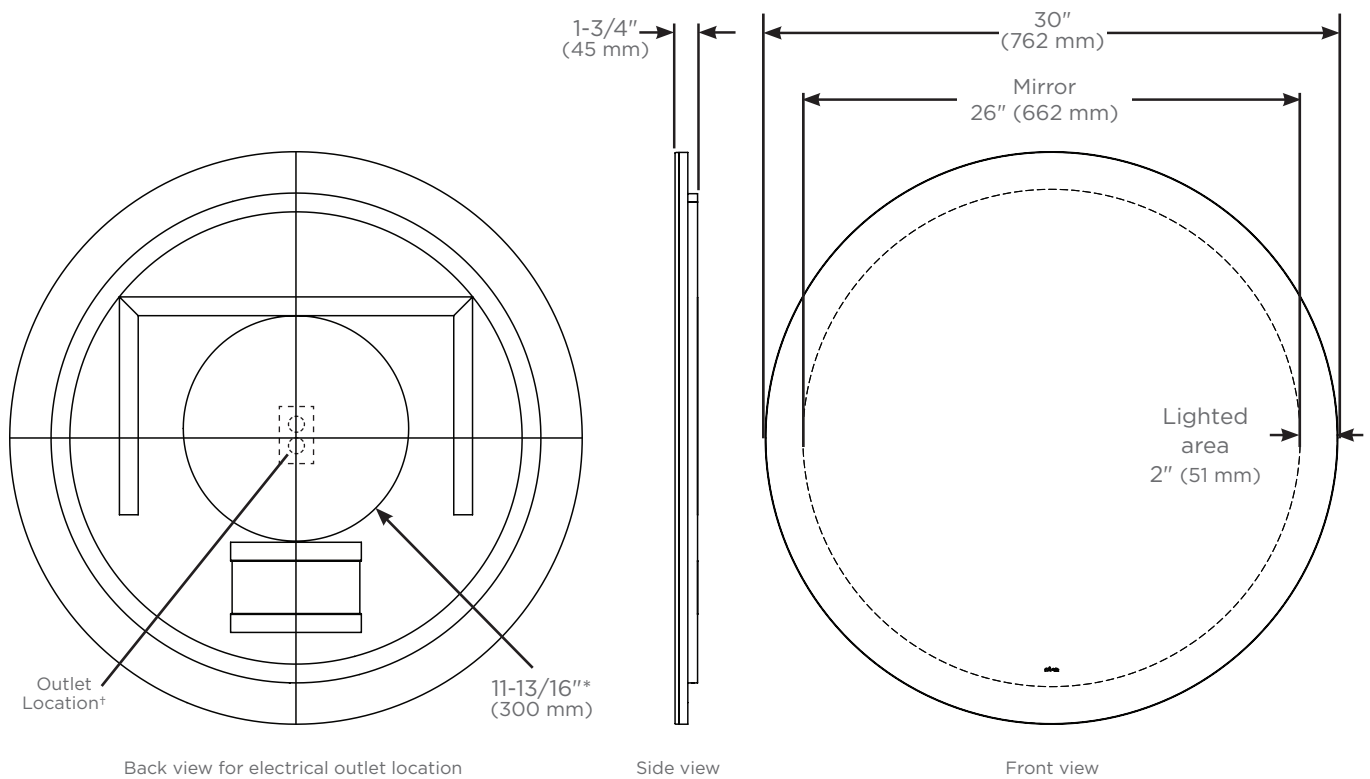

* Defogger Size

† See instructions for wiring and location