



**OSLO WALL MOUNT LIGHTING FIXTURES
ASSEMBLY/INSTALLATION INSTRUCTIONS**

NOTE: Fixtures are suitable for up or down mounting.

1. Before beginning the installation, carefully unpack and identify all parts referring to Figure 1. Make sure the supply power is OFF.
2. Using 2 JUNCTION BOX SCREWS, securely fasten the CROSSBAR to the JUNCTION BOX.
3. **MAKE ELECTRICAL CONNECTIONS:** (We recommend 2 people for the remainder of installation) Connect the SUPPLY GROUND WIRE to the FIXTURE GROUND WIRE with a wire connector and then secure it to the CROSSBAR with GREEN GROUND SCREW. Using wire connectors, connect the SUPPLY WHITE WIRE to the FIXTURE WHITE (or RIBBED) LEAD; Connect the SUPPLY BLACK (or RED) WIRE to the FIXTURE BLACK (or SMOOTH) LEAD. Wrap all connections with approved electrical tape.
4. Place the WALL PLATE over the CROSSBAR; making sure the FIXTURE SCREWS go through the mounting holes on the WALL PLATE. Secure the FIXTURE SCREWS with (2) LOCKING BALLS.
5. Place the INNER GLASS SHADE in the OUTER GLASS SHADE carefully. Place over the SOCKET. Thread SOCKET RING onto the end of the SOCKET. Hand-tighten until snug. Repeat for each SHADE.
6. Install the LIGHT BULB (sold separately), referring to fixture labels for bulb type and maximum wattage. The bulb quantities depend on the style (See Figure 2).
7. Restore supply power (ON). Retain this sheet for future reference.

**IF IN DOUBT ABOUT ELECTRICAL INSTALLATION,
CONSULT A LICENSED ELECTRICIAN.**

FIGURE 1

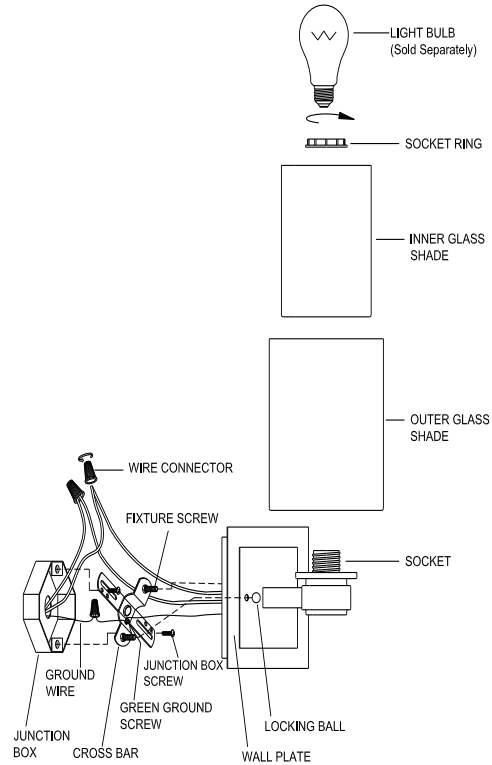


FIGURE 2

