
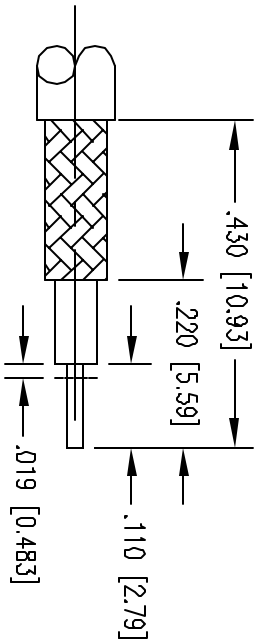


REV	DESCRIPTION	DATE
B	ECR 8081	4/20/04

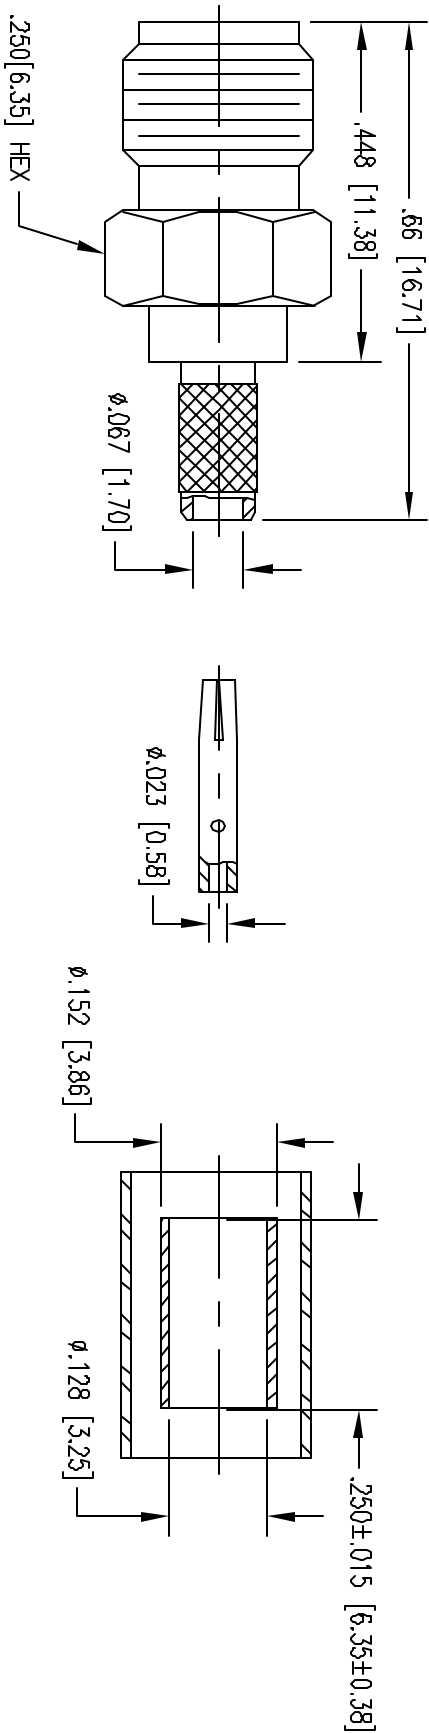

CABLE TRIMMING DIMENSIONS

- NOTES:
- MATERIALS:
 - BODY: BRASS PER ASTM B16
 - INSULATOR: TEFLON PER ASTM D1710
 - CONTACT AND FERRULE: COPPER ALLOY
 - FINISH:
 - CONTACT: .000030 MIN. GOLD PER ASTM B488 OVER
 - .000050 MIN. NICKEL PER AMS-QQ-N-290
 - BODY: .000015 MIN. GOLD PER ASTM B488 OVER
 - .000050 MIN. NICKEL PER AMS-QQ-N-290
 - FERRULE: .000005 MIN. GOLD PER ASTM B488 OVER
 - .000050 MIN. NICKEL PER AMS-QQ-N-290
 - FOR USE WITH RG-316 DOUBLE-SHIELDED CABLE OR EQUIVALENT.
 - FOR CABLING PROCEDURES USE CAP 9-04 WITH TRIMMING DIMENSIONS SHOWN.
 - CRIMP FERRULE USING .151 HEX DIE.

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (IN) DECIMALS XX ± .01 / .024 FRACTIONS XX ± .005 / 0.127 ANGLES ± .1° SCALE: 4:1				Winchester Electronics © 2004 Winchester Electronics Corporation Wallingford, CT 06492			
CUSTOMER DRAWING		DATE 03/09/03		DATE 03/09/03		DATE 03/09/03	
DRAWN JWH		DATE 03/09/03		DATE 03/09/03		DATE 03/09/03	
APPROVED		DATE 03/09/03		DATE 03/09/03		DATE 03/09/03	
A		SD351-900-0631H		SMT		REV	
1		1		1		B	