


REV	DESCRIPTION	BY DATE	APPD
A	RELEASED PER ECR 7733	JED 6/27/03	JEM

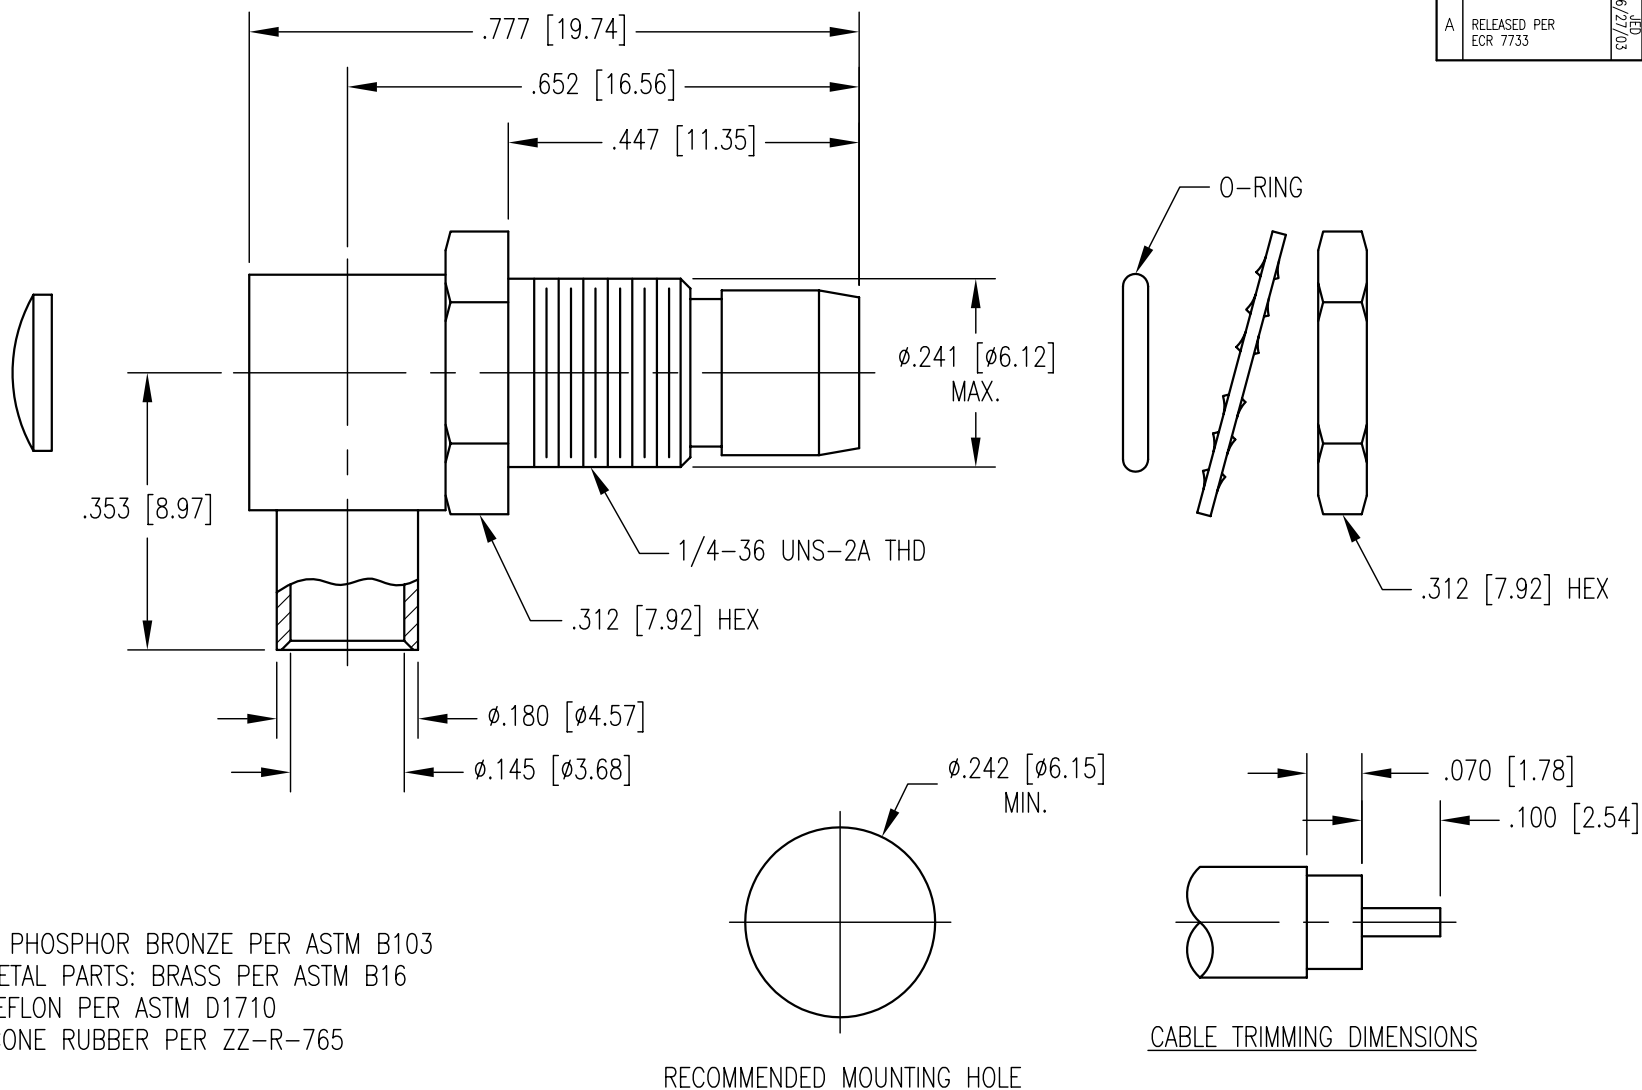

NOTES:

1. MATERIALS:

LOCKWASHER: PHOSPHOR BRONZE PER ASTM B103

ALL OTHER METAL PARTS: BRASS PER ASTM B16

INSULATOR: TEFLON PER ASTM D1710

O-RING: SILICONE RUBBER PER ZZ-R-765

2. FINISH:

BODY: .000015 MIN. GOLD PER MIL-G-45204 OVER

.000050 MIN. NICKEL PER QQ-N-290

CENTER CONTACT: .000030 MIN. GOLD PER MIL-G-45204 OVER

.000050 MIN. NICKEL PER QQ-N-290

NUT AND LOCKWASHER: .000005 MIN. GOLD PER MIL-G-45204 OVER

.000050 MIN. NICKEL PER QQ-N-290

3. FOR USE WITH .141 DIA. SEMI-RIGID CABLE OR EQUIVALENT.

4. FOR CABLING PROCEDURES USE CAP 5-25 WITH TRIMMING DIMENSIONS SHOWN.

PER ASME Y14.5M-1994
UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES [MM]
TOLERANCES:
DECIMALS .XX ± .01 [0.254]
.XXX ± .005 [0.127]
ANGLES ± 2° SCALE: 4:1

CUSTOMER
DRAWING**NORTHROP GRUMMAN**

Winchester Electronics

62 Barnes Industrial Road North
Wallingford, CT 06492

TITLE

BMA RIGHT ANGLE
BULKHEAD PLUG

DRAWN JED	DATE 2/28/02	CHECKED JWH	DATE 3/1/02
APPROVED JEM	DATE 2/28/02	APPROVED KJT	DATE 3/1/02

A	SD362-574-1410H	SHT. 1	OF 1	REV. A
---	-----------------	-----------	---------	-----------