
INSTRUCTION MANUAL

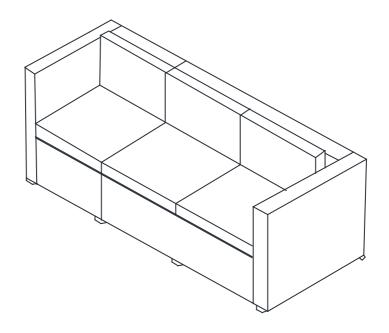

82" Wide Outdoor Patio Sofa with Cushions SKU: P152-01-A


! NOTICE

Do not overtighten screws. (Insert all screws before tighten screws.)


- · Please do not exceed the weight limitations of this item.
- Do not stand on or use any part of this item as a step ladder.
- · Firmly secure all bolts, screws and nuts before use.
- Reconfirm that all bolts, screws, and nuts are secure every 90 days.
- Do not use or store this item in the proximity of open flame or flammable/combustible chemicals.
- · Be aware that some parts are heavy and have sharp edges.




HARDWARE




PARTS

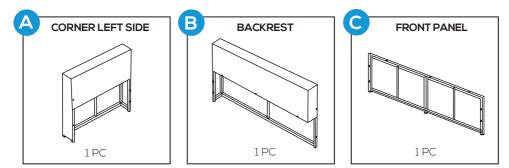



PARTS
















CUSHIONS






PRODUCT ASSEMBLY - CORNER SEAT I



Attach part B Backrest to part A Corner Left Side with 2 PCS of hardwae ${\bf 1}$ Washer and hardware 2 Bolt.


Do not tighten screws too much at this stage.

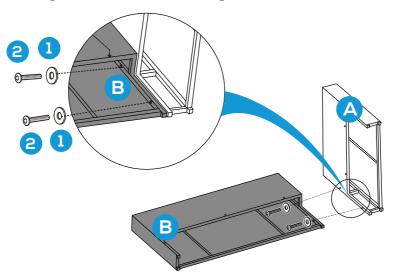

2

Attach part C Front Panel to part E Sofa Top with 3 PCS of hardware 1 Washer and hardware 2 Bolt.

Attach part D Side Panel to part C Front Panel with 2 PCS of hardware 1 Washer and hardware 2 Bolt.

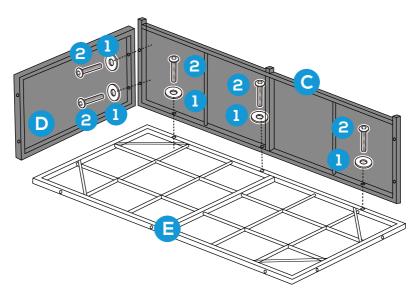


PRODUCT ASSEMBLY - CORNER SEAT I



Attach the assembled part (D+C+E) to assembled part (A+B) with 4 PCS of hardware 1 Washer and hardware 2 Bolt, 5 PCS of hardware 1 Washer and hardware 3 Bolt as below.


Tighten all the bolts again to ensure this corner seat is stable enough to use.

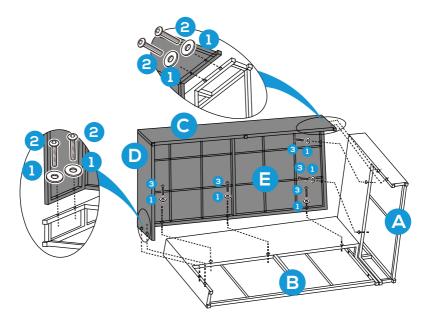

4

Place part ZI Seat Cushion and part Z2 Back Cushions onto the Corner Seat..


The assembly of first corner seat finishes.



PRODUCT ASSEMBLY - CORNER SEAT II




Attach the part G Corner Left Side to part F Corner Right Side with 2 PCS of hardware 1 Washer and hardware 2 Bolt.





Attach part H Corner F-Panel to part I Seat Top with 2 PCS of hardware 1 Washer and hardware 2 Bolt.


Attach part D Side Panel to part H Corner F-Panel with 2 PCS of hardware 1 Washer and hardware 2 Bolt.

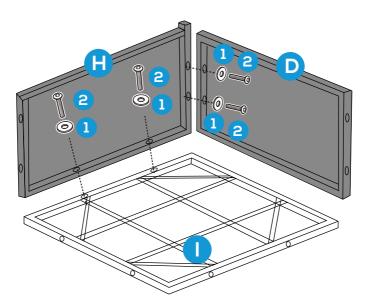

PRODUCT ASSEMBLY - CORNER SEAT II

7

Attach the assembled part (D+H+I) to assembled part (F+G) with 4 PCS of hardware 1 Washer and hardware 2 Bolt; 4 PCS of hardware 1 Washer and hardware 3 Bolt as below.

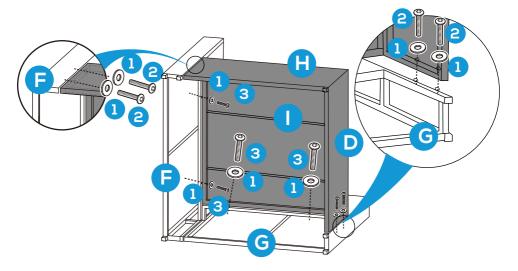

8

Place part ZI Seat Cushion, part Z2 Back Cushions into the corner seat..

The assembly of single corner seat finishes.

