

The new standard in SDI matrix technology

The Just Add Power 2G+ SDI PoE Transmitter adds SDI support to the HD over IP system and has all of the features of 2G+:

- **SD-/HD-/3G-SDI formats**
- **Stereo output with audio delay**
- **Local HDMI Loopout**
- **Null Modem-integrated RS232**
- **HDMI Pass-through**




Mix-and-match! The 2G+ SDI PoE Transmitter is fully compatible with all 2G and 2G+AVP models and viewable on any Just Add Power Receiver. Add an SDI source to your HD over IP system without the need for an SDI-HDMI converter.




Features	
Compatible with all 2G products	
Locking HDMI cable	
HDMI Pass-through	
RS232 with integrated null modem	
Stereo audio output + 170ms audio delay	
All 2G features	
<ul style="list-style-type: none"> • Stereo or multi-channel audio • Instant-seamless Switching • Video Wall • Image Pull • 2-way RS232 control 	


Compliance	HDCP & RoHS/FCC/CE
Operating Temp	0-60 °C / 32-140 °F
Supported Resolutions	Up to 1080p50/60 Hz PC: 1920 x 1200 SDI: SD/HD/3G
Dimensions & Weight	199 x 31 x 127 mm 7.8" x 1.2" x 5.0" 0.54 kg / 1.2 lb
Ports	SDI In HDMI Out Ethernet connector 3.5mm Stereo Out 3.5mm RS232 w/ null modem
Bandwidth	Up to 150 Mbps
Power Supply (not included)	DC5V, 2A minimum 5.5mm/2.1mm, Positive tip
PoE	10 watts maximum

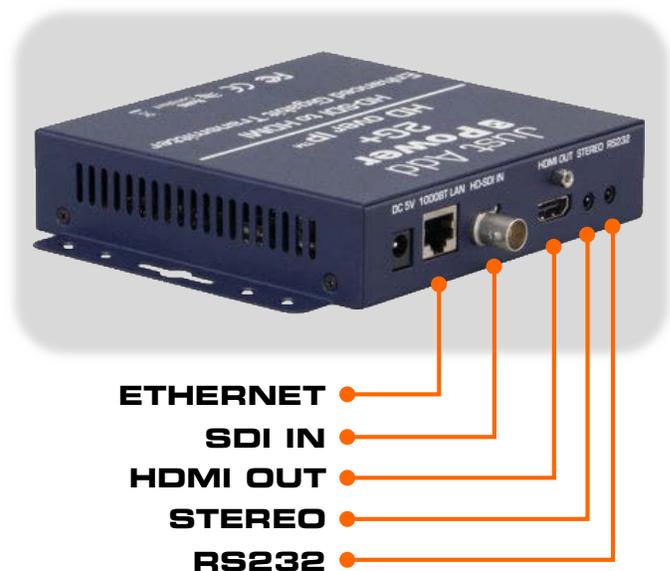

All measurements are in millimeters (mm)

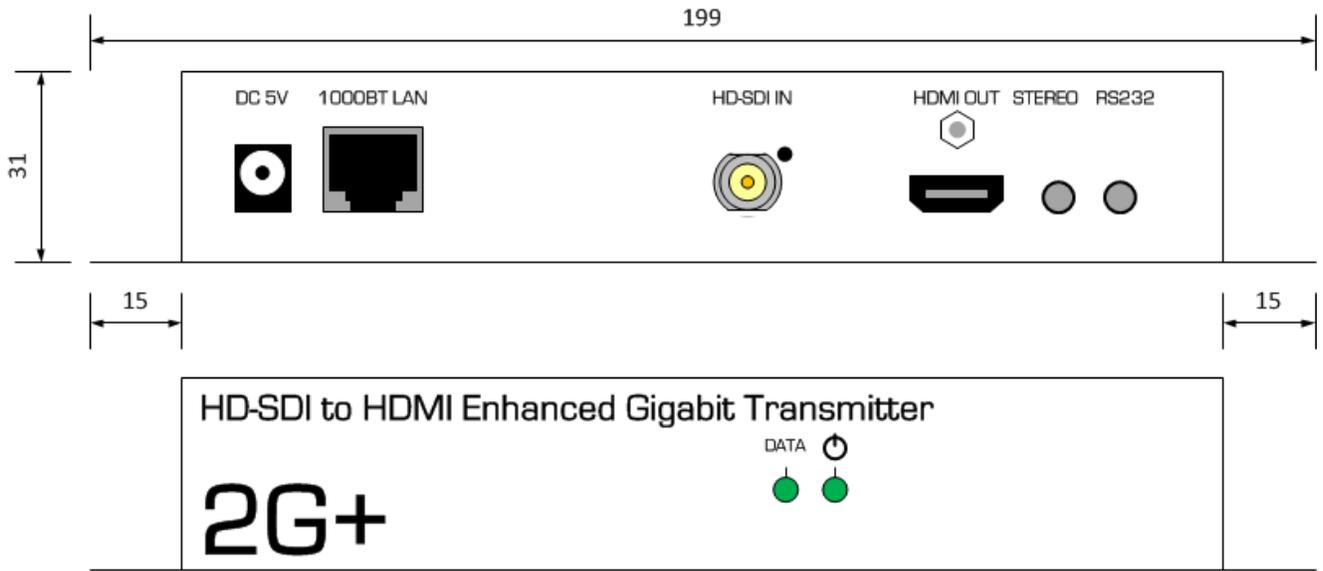

428PoE Front/Back

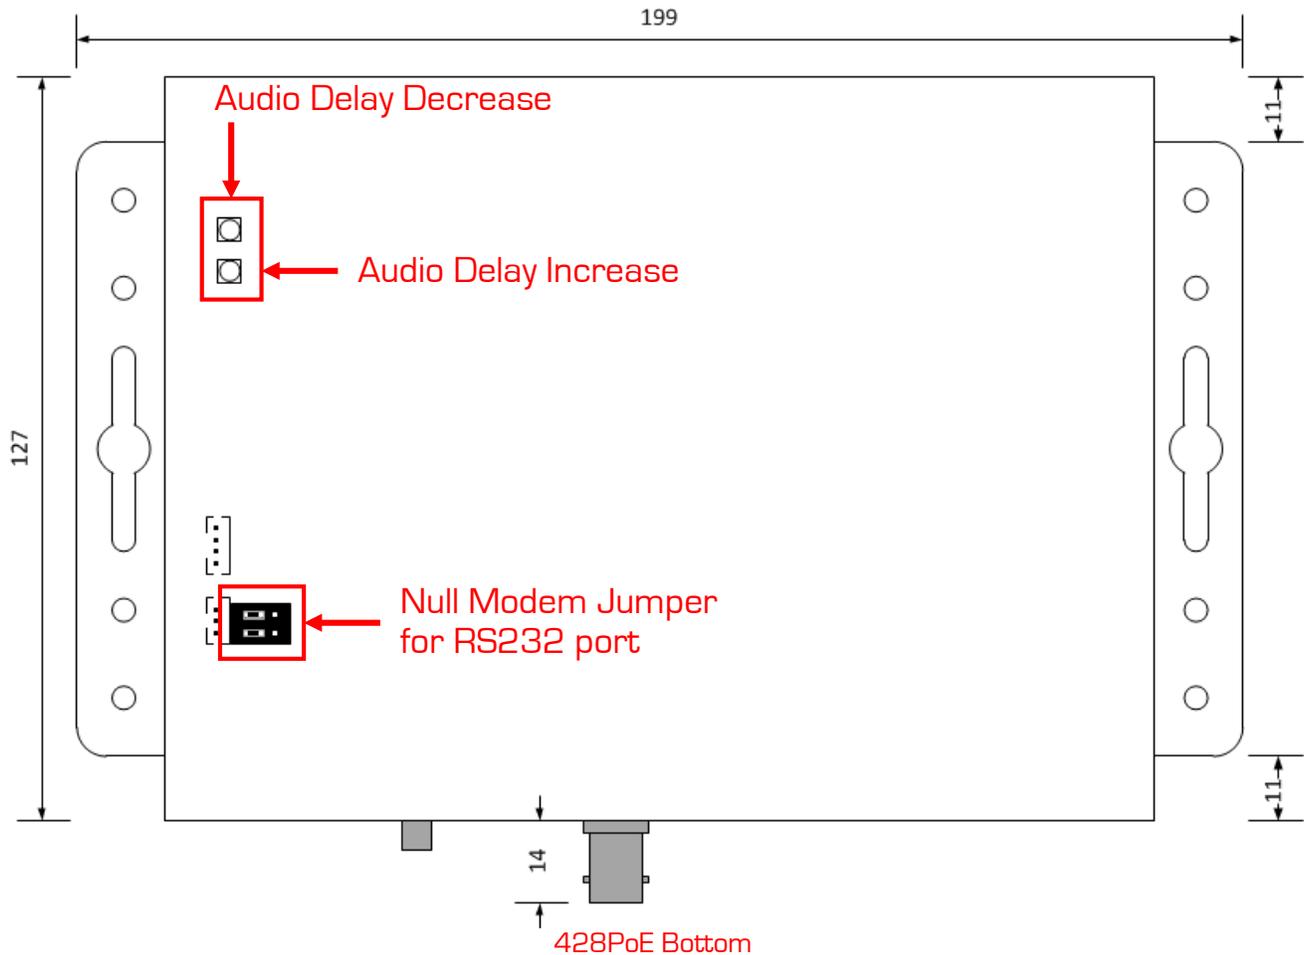

428PoE Bottom