



## FLARE X COMPRESSION BRAIDED STAINLESS STEEL TEXAS STYLE FAUCET CONNECTOR

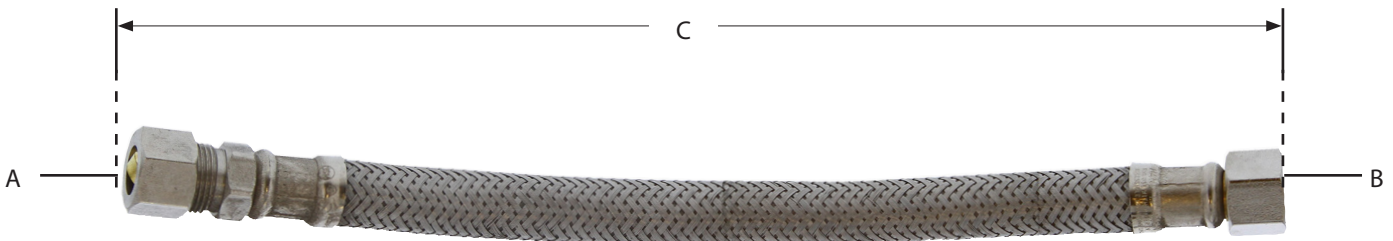

- Used for supplying water to faucets
- Texas style faucet connector
- Working pressure: 124 PSI
- Inner core of PVC withstands temperatures of 68°F-158°F
- Quick and easy installation
- No special tools needed
- Flexible, braided stainless steel connector resists kinking and creasing
- Nickel plated nut
- cUPC listed
- Meets NSF/ANSI/CAN 372, NSF/ANSI/CAN 61: Q ≤ 0.5, and NSF/ANSI 14 standards
- ASME A112.18.6/CSA B125.6
- Lead free



Part No.	Flare - A	Compression - B	Length - C
S04245	0.37"	0.37"	9"
S04246	0.37"	0.37"	12"
S04247	0.37"	0.37"	16"
S04248	0.37"	0.37"	20"
S04249	0.37"	0.37"	30"
S04250*	0.37"	0.37"	36"

\*Part is UPC only