

NOTES: UNLESS OTHERWISE SPECIFIED
1. FOR GENERAL SERIES SPECIFICATIONS, SEE SDHHD-0000.

2. MATERIAL SPECIFICATIONS:
INSULATORS: PTFE - NATURAL
CONTACT: BERYLLIUM COPPER
ALL OTHER METAL PARTS: BRASS


3. FINISH SPECIFICATIONS:
CONTACT: .000003 MIN THICK GOLD OVER .000050 MIN THICK NICKEL
ALL OTHER METAL: .000100 MIN THICK NICKEL OVER .000050 MIN THICK COPPER

4. ELECTRICAL SPECIFICATIONS:
NOMINAL IMPEDANCE: 75 OHMS
FREQUENCY RANGE: DC-12 GHz
RETURN LOSS: -20 dB @ 6.0 GHz
INSERTION LOSS: 0.05 dB @ 6.0 GHz

5. COMPLIANT TO SMPTE 424M (3G-SDI) STANDARD.

6. RoHS COMPLIANT.

REV	DESCRIPTION	BY	DATE	APPD
A	ER060193	J	10/20/2015	DCAM

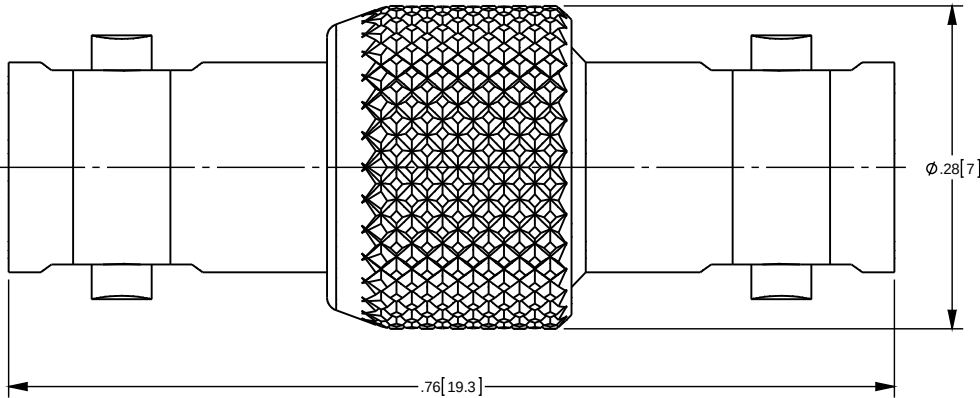

CATALOG P/N: HHD-BNC-J-J

PER ASME Y14.5M-1994
UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES [MM]
TOLERANCES:
DECIMAL: .XX [XX] ± .01 [0.3]
XXX [XXX] ± .005 [0.13]
XXXX [XXXX] ± .000X
ANGLES: ± 2° SCALE: 8:1

CUSTOMER
SALES DRAWING



BOMAR

by WINCHESTER Winchester Electronics Corporation
199 Park Road Ext Suite 104
Middlebury, Connecticut 06762

HD-BNC JACK TO JACK ADAPTER

DRAWN	DATE	APPROVED	DATE
J	10/12/2015	J	10/20/2015
APPROVED	DATE	APPROVED	DATE
DCAM	10/20/2015	XXX	XX/XX/XX

A	SDHHD-BNC-J-J	SHT	OF	REV
		1	1	A