


REV	DESCRIPTION	BY DATE	APPD
C	ECR 7567	12/18/02	<i>[Signature]</i>

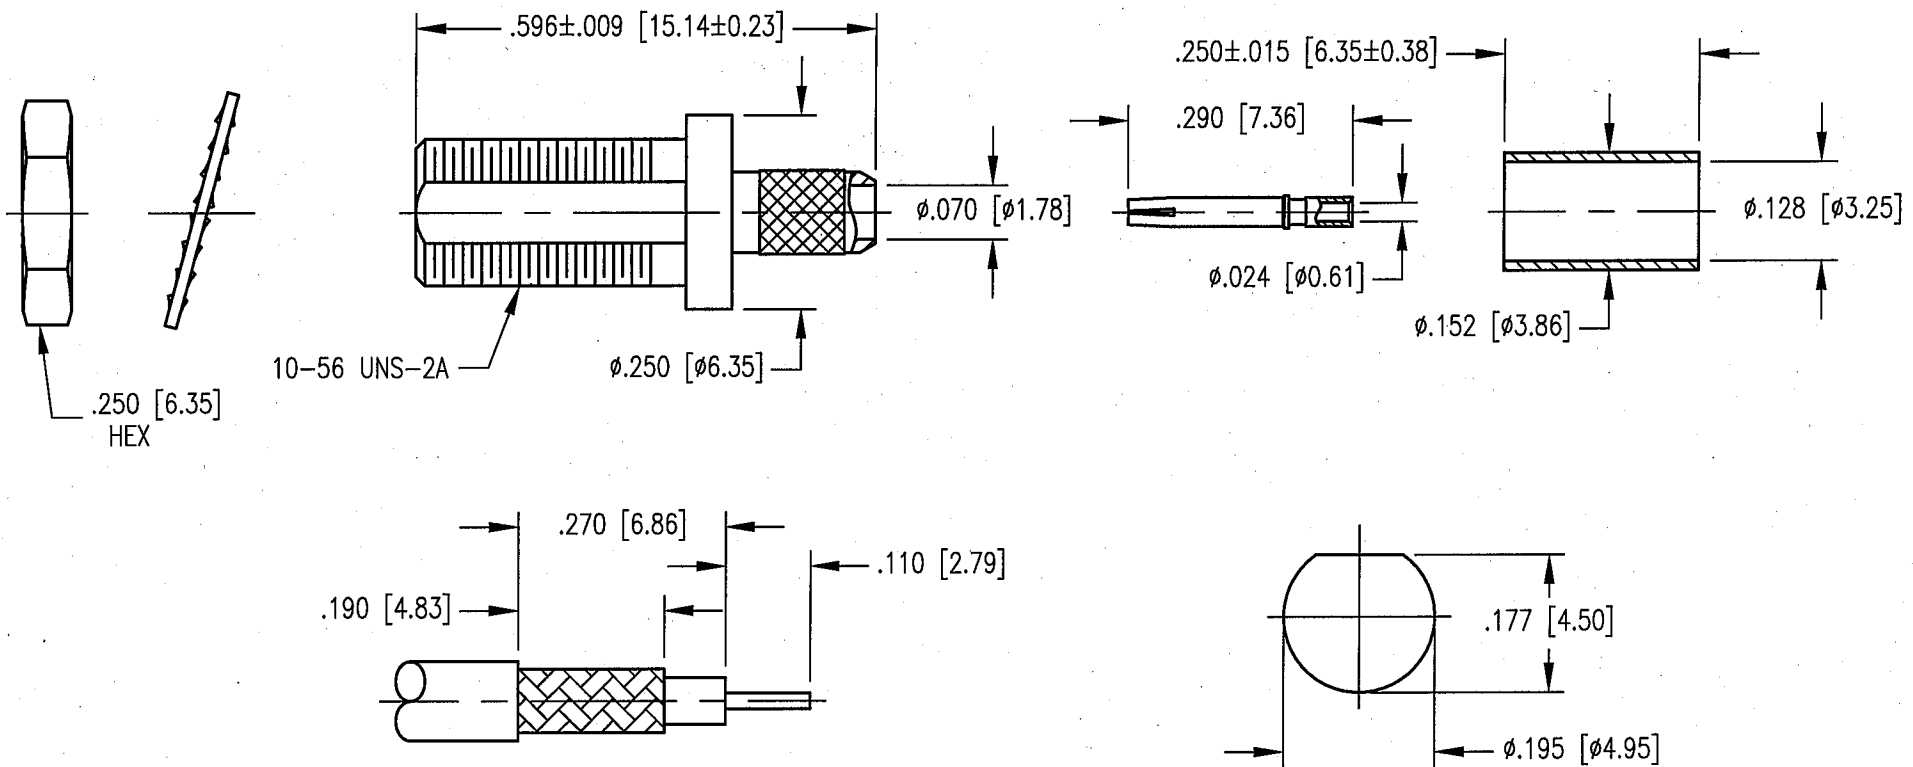

NOTES:

- MATERIALS:  
 BODY, FERRULE AND NUT: BRASS PER ASTM B16  
 CONTACT: COPPER ALLOY  
 WASHER: PHOSPHOR BRONZE PER ASTM B103  
 INSULATOR: TEFLON PER ASTM D1710
- FINISH:  
 BODY: .000015 MIN. GOLD PER MIL-G-45204 OVER  
 .000050 MIN. NICKEL PER QQ-N-290  
 CONTACT: .000030 MIN. GOLD PER MIL-G-45204 OVER  
 .000050 MIN. NICKEL PER QQ-N-290  
 ALL OTHER METAL PARTS: .000005 MIN. GOLD PER MIL-G-45204 OVER  
 .000050 MIN. NICKEL PER QQ-N-290
- FOR USE WITH RG-316 CABLE OR EQUIVALENT.
- FOR CABLING PROCEDURE USE CAP 9-08 WITH TRIMMING DIMENSIONS SHOWN.
- CRIMP FERRULE USING .128 HEX DIE.

RECOMMENDED MOUNTING HOLE

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM]		<b>NORTHROP GRUMMAN</b>	
TOLERANCES: DECIMALS .XX ± .01 [0.254] .XXX ± .005 [0.127] ANGLES ± 2° SCALE: 4:1		Winchester Electronics 400 Park Road Watertown, CT 06795	
<b>CUSTOMER DRAWING</b>		TITLE MCX BULKHEAD JACK	
DRAWN KJT	DATE 11/15/99	CHECKED JED	DATE 11/15/99
APPROVED JMC	DATE 11/15/99	APPROVED JC	DATE 11/15/99
A		451-980-0630H	SHT. OF REV. 1 1 C