


Installation Guide

Self-Rimming Lavatory

442007

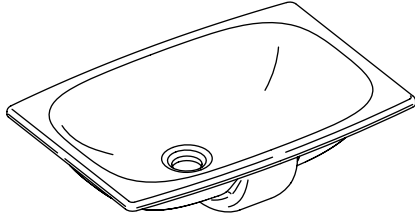

Français, page "Français-1"
Español, página "Español-1"




1086447-2-A

Thank You For Choosing Sterling

We appreciate your commitment to Sterling value. Please take a few minutes to review this manual before you start installation. If you encounter any installation or performance problems, please don't hesitate to contact us. Our phone numbers are listed within this manual. Thanks again for choosing Sterling.

Tools and Materials



Template
(supplied)



Pencil



Sealant



Drill



Safety
Glasses



Scissors



Tape
Measure




Jigsaw

Plus:

- 1/2" drill bit
- Rags or Paper Toweling

Before You Begin

- Observe all local plumbing and building codes.
- Prior to installation, unpack the new lavatory and inspect it for damage. Return the lavatory to its protective carton until you are ready to install it.
- Inspect the drain and supply tubing. Replace if necessary.
- Use the template supplied with the lavatory.
- You must cut the hole in the countertop **before** installing the countertop.
- For replacement installations, make sure the existing cutout is the same size or smaller than needed for the new lavatory.
- Sterling reserves the right to make revisions in the design of products without notice, as specified in the Price Book.

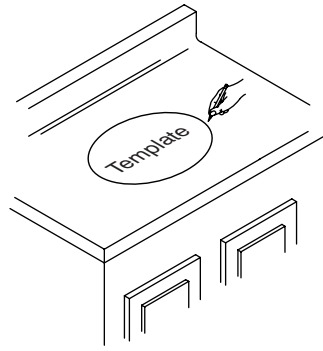

1. Preparation

- Install the water supplies and drain piping according to the roughing-in information.
- Determine which template cut line corresponds with the lavatory model to be installed.
- Cut out the template where indicated for countertop opening. Cut along the inside of the cutting line.
- Position the template on the countertop.
- Verify cabinet clearance beneath the countertop.
- Trace around the template on the countertop with a pencil.

2. Install the Lavatory

NOTE: To avoid possible damage to the cabinet, cut the countertop **before** installing the countertop to the cabinet.

- Cut out the countertop opening by carefully following the pencil line traced from the template.
- Install the countertop to the cabinet.
- Install the faucet and drain to the lavatory according to the manufacturer's instructions.
- Carefully position the lavatory in the cut-out opening.
- Apply a thin continuous bead of sealant around the lavatory edge.
- Immediately wipe away any excess sealant, and fill any voids as needed.
- Verify that the lavatory has not moved out of position.

Install the Lavatory (cont.)

- Allow the sealant to cure for at least 30 minutes before proceeding.
- Connect and tighten the trap to the drain, and complete the water supply connections to the faucet according to the instructions packed with the faucet.
- Run water into the lavatory and check for leaks.
- Clean up with a non-abrasive cleaner.

Care and Cleaning

For best results, keep the following in mind when caring for your STERLING product:

- Use a mild detergent such as liquid dishwashing soap and warm water for cleaning. Do not use abrasive cleaners that may scratch or dull the surface.
- Carefully read the cleaner product label to ensure the cleaner is safe for use on the material.
- Always test your cleaning solution on an inconspicuous area before applying to the entire surface.
- Do not allow cleaners to sit or soak on the surface.
- Wipe surfaces clean and rinse completely with water immediately after cleaner application. Rinse and dry any overspray that lands on nearby surfaces.
- Use a soft, dampened sponge or cloth. Never use an abrasive material such as a brush or scouring pad to clean surfaces.

For detailed cleaning information and products to consider, visit www.sterlingplumbing.com/support.html. To order Care & Cleaning information, call 1-800-456-4537 and press 2 for Sterling Products and then 3 for Literature.

Warranty - 5 Years Limited

Based on the classification specified above, Sterling Plumbing, a division of Kohler Co., (Sterling) toilets and lavatories made of vitreous china are warranted to be free of manufacturing defects for 5 years from the date of sale. Sterling also warrants for 5 years from the date of sale that its low consumption toilets will be free of manufacturing defects that prevent one flush cleaning bowl per ASME A112.19.6 1990