
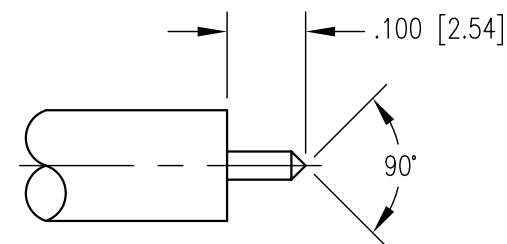


DWG. NO.

SD361-500-1410H

REV	DESCRIPTION	BY	DATE	APPD
A	RELEASED PER ECR 7733	JED	7/7/03	JEM

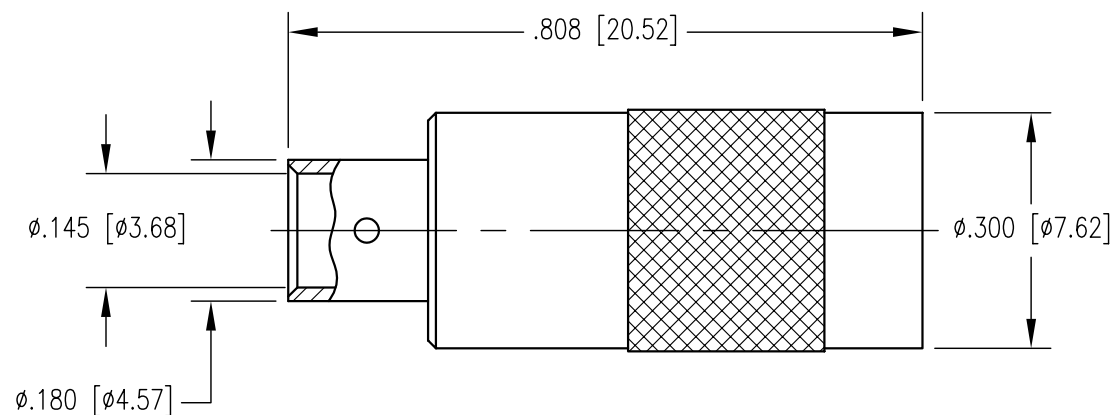

CABLE TRIMMING DIMENSIONS

NOTES:

1. MATERIALS:

BODY AND SHROUD: BRASS PER ASTM B16

CONTACTS: COPPER ALLOY

INSULATOR: TEFLON PER ASTM D1710

2. FINISH:

BODY: .000015 MIN. GOLD PER MIL-G-45204 OVER

.000050 MIN. NICKEL PER QQ-N-290

ALL OTHER METAL PARTS: .000030 MIN. GOLD PER MIL-G-45204 OVER

.000050 MIN. NICKEL PER QQ-N-290

3. FOR USE WITH .141 DIA. SEMI-RIGID CABLE OR EQUIVALENT.

4. FOR CABLING PROCEDURES USE CAP 5-24 WITH TRIMMING DIMENSIONS SHOWN.

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMALS .XX ± .01 [0.254] .XXX ± .005 [0.127] ANGLES ± 2° SCALE: 4:1				NORTHROP GRUMMAN Winchester Electronics 62 Barnes Industrial Road North Wallingford, CT 06492			
CUSTOMER DRAWING				TITLE BMA STRAIGHT RECEPTACLE			
DRAWN JED DATE 7/23/02	CHECKED JWH DATE 9/5/02	APPROVED JEM DATE 9/5/02	APPROVED MG DATE 9/5/02	A	SD361-500-1410H	SHT. 1 OF 1	REV. A