

Touchless Soap Dispenser - Square Semi Vessel

FEATURES

- Sensor operated foaming soap dispenser
- Self-adjusting sensor spout with base unit, mounting hardware and supply lines
- Chrome plated
- Single-hole mount
- TOTO Soap required
- Refillable tank system
- ADA compliant

COLORS/FINISHES

- #CP Polished Chrome

OPTIONAL ACCESSORIES

- THP3140#CP
Escutcheon 1-1/8" ~ 1-1/2" (28 mm ~ 38 mm)
- THP3374
Mounting bracket for tank

MODELS

- TES201AF#CP (1 Spout)
TLK08002G#CP (Spout x 1 pc)
TLK01101UA (Controller for 1 Spout & Reservoir)
- TES202AF#CP (2 Spouts)
TLK08002G#CP (Spout x 2 pcs)
TLK01102U (Controller for 2 Spouts & Reservoir)
- TES203AF#CP (3 Spouts)
TLK08002G#CP (Spout x 3 pcs)
TLK01103U (Controller for 3 Spouts & Reservoir)



Auto Functions

PRODUCT SPECIFICATION

TOTO Model # _____ Product shall be automatic infrared sensor activated. Product shall have automatic sensor adjustment upon installation. Soap dispenser and controller w/ reservoir will be sold separately. Product shall have a controller pump with 0.8 gallon (3L) reservoir.

CODES/STANDARDS

- Meets and exceeds UL1951, CSA C22.2 #68
- Certifications: UL
- Code Compliance: NEC, CEC
- ADA Compliant
- Compliance with CA Prop 65 warning requirements



COMPONENT BREAKDOWN

Soap Dispenser Specification Details

Step 1: Choose quantity of spouts desired

Step 2: Select kit or by individual component quantities

KIT OPTIONS		COMPONENTS			
Kit Model #	Spout Installation	SPOUT		CONTROLLER & RESERVOIR	
		Model #	Spout Qty	Model #	Component Qty
TES201AF#CP	1	TLK08002G#CP	1	TLK01101UA	1 (For 1 Spout)
TES202AF#CP	2	TLK08002G#CP	2	TLK01102U	1 (For 2 Spouts)
TES203AF#CP	3	TLK08002G#CP	3	TLK01103U	1 (For 3 Spouts)

TES20(1/2/3)AF Series

Touchless Soap Dispenser - Square Semi Vessel

SPECIFICATIONS

Power Supply	AC 120V
Wattage	(TLK01101UA) 4W (TLK01102U) 6.5W (TLK01103U) 9W
Sensor Detection Range	5-1/8" ~ 7-7/8" (130 ~ 200 mm) Sensor is self-adjusting
Ambient Temperature	34-104°F (1-40°C)
Humidity	Max. 90% RH
Power Cord Length	55" (1.4 m)
Soap Output Volume	0.04 oz (factory setting)
Tank Capacity	Approximately 0.8 gallon (3L)
Warranty	*Three Year Warranty

* Failure to use TOTO soap will void warranty

INSTALLATION NOTES


- Spout Mounting Hole $\phi 1"$ ~ $\phi 1\text{-}1/8"$ ($\phi 25$ ~ $\phi 28$ mm)
- Deck Thickness $1/4"$ ~ $1\text{-}1/8"$ (5 ~ 30 mm)

TOTO SOAP *(Sold Separately)*

SKU No.	Quantity	Packaging	Notes
TSFG1	4 gal.	Package of 4, 1 gal. each	Antimicrobial Soap (Fresh)
TSFG55	55 gal.	Package of 1, 55 gal. each	Antimicrobial Soap (Fresh)
TSFB1-GS	4 gal.	Package of 4, 1 gal. each	TOTO Foam Soap Green Seal™ (Lilac)



DIMENSIONS

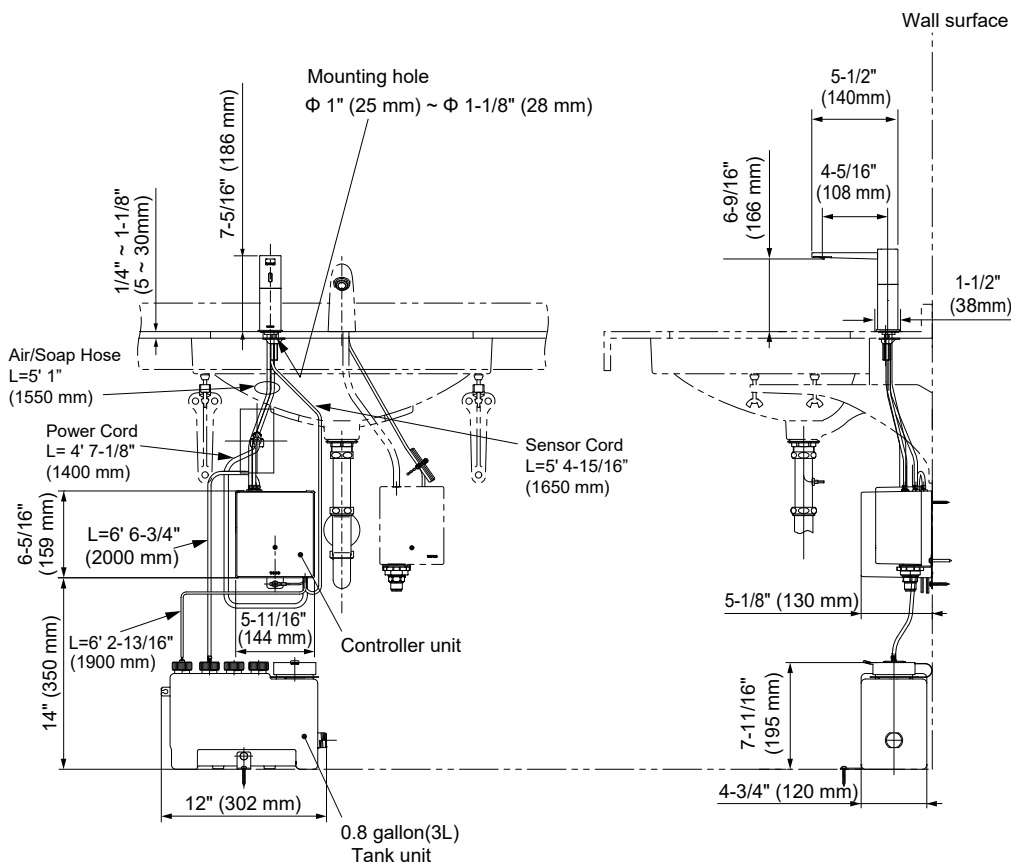

TOTO®

These dimensions and specifications are subject to change without notice