

- Failure to read and follow these warnings may result in serious injury.**
1. Always wear safety glasses when operating the blower fans.
 2. In dusty areas a dust mask or respirator, may be necessary.
 3. To prevent shock hazard never use near or in water. Never use in areas with standing water.
 4. Never use in areas or near flammable liquids.
 5. Air flow must be free of restrictions, as you may cause damage to the unit.
 6. Never unplug the blowers by pulling on the cord. Check the power cord for damage prior to use.
 7. Be sure the blower is secure if using in an unstable environment.
 8. Never place any tool or object into the air intake or discharge grill.
 9. For optimum performance keep the motor, air blower and blower wheel clean.
 10. Always disconnect the power cord prior to servicing and when not in use.
 11. Check the motor, air blower, power and housing of the blowers for any possible damage.
 12. Never use the 15 amp receptacles with a device rated higher than 15 amps.
 13. Arrange the power cord away from traffic area where it may be tripped over.
 14. Never run the power cord under carpeting or use a throw rug to cover it.

SAFETY INFORMATION

LIMITED WARRANTY

Performance Tool® extends only the following warranties, and only to original retail purchasers. These warranties give specific legal rights. Except where prohibited by local law, the law of the State of Washington governs all warranties and all exclusions and limitations of warranties and remedies. There may be other rights which vary from state to state.

Performance Tool® warrants the product to be free from defects in materials and workmanship under normal use and service. A defective product may be returned for a free replacement within 90 days from the date of purchase, provided that product is returned to place of purchase immediately after discovery of defect. After 90 days and up to one year from date of purchase, Performance Tool® will replace at no charge any parts which our examination shall disclose to be defective and under warranty. These warranties shall be valid only when a sales receipt showing the date of purchase accompanies the defective product or defective part(s) being returned. For part(s) after 90 days, please remit your request, postage prepaid to:

Performance Tool, P.O. Box 88259 Tukwila, WA 98138

These warranties exclude batteries, bulbs, blades, bits, punches, dies, bulbs, fuses, hoses, and other consumables which must be replaced under normal use and service. These warranties shall not apply to any product or part which is used for a purpose for which it is not designed, or which has been repaired or altered in any way so as to affect adversely its performance or reliability, nor shall these warranties apply to any product or part which has been subject to misuse, neglect, accident or wear and tear incident to normal use and service.

Performance Tool® does not authorize any other person to make any warranty or to assume any liability in connection with its products.

Except for warranties of title and the limited express warranties set forth above, Performance Tool® makes no express or implied warranties of any kind with respect to its products. In particular, Performance Tool® makes no implied warranty of merchantability and no implied warranty of fitness for any particular purpose, except that for goods purchased primarily for personal, family or household use and not for commercial or business use, Performance Tool® makes an implied warranty of merchantability (and, if otherwise applicable, an implied warranty of fitness for a particular purpose), but only for the particular qualities or characteristics, and for the duration, expressly warranted above.

The laws on limitation of implied warranties may differ from state to state, so the above limitations may not apply in all cases.

Performance Tool® shall not be liable for consequential, incidental or special damages resulting from or in any manner related to any product, or to the design, use, or any inability to use the product. The sole and exclusive remedy for a defective product or part shall be the repair, or replacement thereof as provided above. The laws on limitation of remedies or on consequential, incidental or special damages may vary from state to state, so the above limitations may not apply in all cases.

WARNING: This product and its packaging contain a chemical known to the State of California to cause cancer, birth defects or other reproductive harm.

Always wear eye protection when using tools.

- RPM: 1400 - 1500 - 1600 approx.
- Rated voltage: 120 V
- Rated frequency: 60 Hz
- Rated Power: 2.0 Amp
- Unit weight: 15.9 lbs.
- 3 Speed switch controls motor speed: 1400-1500-1600 RPM approx.
- Built-in overload protection
- For indoor and outdoor use
- Heavy duty 8 ft. 4 in. SJTW 14 AWG 3 prong grounded cord
- Impact resistant ABS plastic housing
- Moves up to 1200 cu. ft. per minute
- Sets in 4 different positions
- Built-in carrying handle and cord wrap
- 2 Built-in 15 amp grounded outlets
- With over current protection


SPECIFICATIONS

1200 CFM ELECTRIC BLOWER

VENTILADOR ELÉCTRICO

Model No. W50068

OWNER'S MANUAL

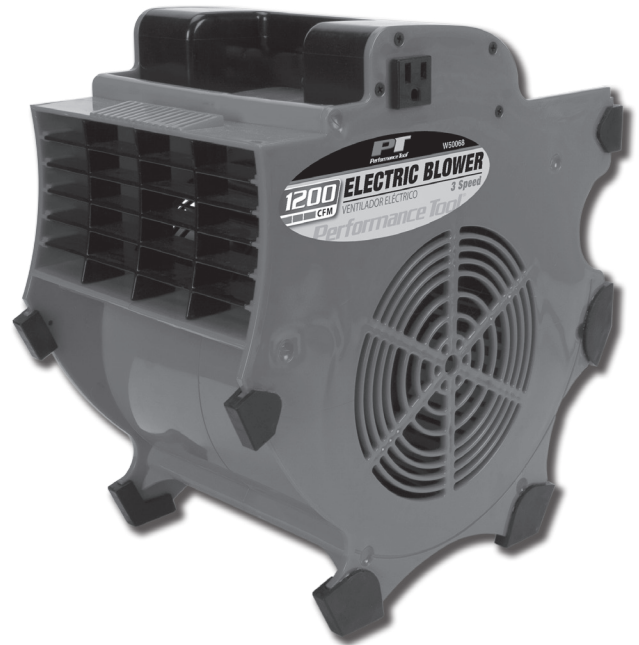

Performance Tool®

PT
Performance Tool

P.O. Box 88259 Tukwila, WA 98138 • © 2017 Wilmar Corporation • All rights reserved
Performance Tool® is a registered trademark of Wilmar Corporation

PT
Performance Tool

FOR YOUR SAFETY,
please read these instructions carefully and
retain them for future use.