
SCHOOLHOUSE



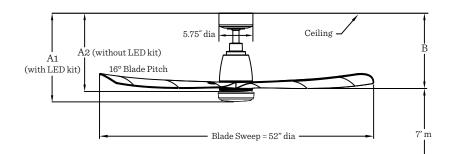

Net Hanging Weight: 12.30 lbs

	A1 (with LED kit)	A2 (without LED kit)	В
Fan with 4.5″ Downrod	13.88″	12.58″	12.58″
Fan with 12″ Downrod	21.38″	20.08″	20.08″
Fan with 18″ Downrod	27.38″	26.08″	26.08″
Fan with 24″ Downrod	33.38″	32.08″	32.08″
Fan with 36″ Downrod	45.38″	44.08″	44.08″
Fan with 48″ Downrod	57.38″	56.08″	56.08″
Fan with 60″ Downrod	69.38″	68.08″	68.08″
Fan with 72″ Downrod	81.38″	80.08″	80.08″

Airflow/Energy Efficiency Info (120V)

Fan Speed	High	Medium	Low
Max RPM	171	107	29
CFM	6701	4112	917
CFM/Watts	186	480	445
Amps	.55	.14	.05
Watts	36	9	2

Light Bulb Information (120V)

Bulb Type	LED		
Watts	16		ſ
QTY	1		
Lumens Amount	1500		
Color Temp	3000		
CRI	90%		Effi
		·	

Power (Wave)	22
Total Air Delivery (CFM _{ave})	4873
Esimated Yearly Energy Cost (\$)	6
Ceiling Fan Efficiency (CFM/W)	217

Floor

Kute 52" LED Ceiling Fan

Shown in Matte White with LED Light Kit

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

100 x 30 sensorless DC motor is designed for optimal performance with this fan.

BLADE SET:

A set of three 25" composite blades is included.

LIGHTING OPTIONS:

One removeable 16-watt dimmable LED included.

CONTROL OPTIONS:

A WiFi receiver and hand-held remote control are included. Push button remote control with 16 fan speeds, fresh air, reverse, infinite light levels, fan/light timer, home away, safe exit and off button. Visit the Apple APP Store or Google Play Store to download the free fanSync WiFi APP and create your Fanimation fanSync account.

DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72" lengths. Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a downrod longer than the standard 18" downrod. Optional close-to-ceiling kit is available. Call technical support for more information.

LOCATION USE:

Fan is rated for dry, and damp locations.

AVAILABLE FINISHES:



(800) 630-7113 customersupport@schoolhouse.com

schoolhouse.com