


NOTES: UNLESS OTHERWISE SPECIFIED

- FOR GENERAL SERIES SPECIFICATIONS, SEE SDPRF-206.
- MATERIAL SPECIFICATIONS:
BAYONET SLEEVE, BODY, CONTACT AND FERRULE: BRASS PER ASTM B16
INSULATOR: TEFLON PER ASTM D1710
SPRING WASHER, OUTER CONTACT: BERYLLIUM COPPER, ASTM-B-194
GASKET: SILICONE RUBBER
- FINISH SPECIFICATIONS:
BAYONET SLEEVE, BODY: .000100MIN NICKEL PER AMS-QQ-N-290
OVER COPPER FLASH PER ASTM B734 (ROHS)
CONTACT: .000030 MIN. GOLD PER ASTM B488, OVER NICKEL PER AMS-QQ-N-290 (ROHS)
ALL OTHER METAL PARTS: .000050 MIN NICKEL PER AMS-QQ-N290 OVER
.000050 MIN COPPER PER ASTM B734 (ROHS)
- CONTACT AND FERRULE SHIPPED LOOSE.
- FOR USE WITH BELDEN CABLE 1855A OR EQUIVALENT.
- FOR CRIMPING USE KINGS KTH-5000 & KTH-5003 OR KTH-1000 & KTH-2025 (.041AND .178 HEX CAVITY).
- ASSEMBLE TO CABLE SEE 3-661-1.
- THESE AREAS HAVE WHITE MARKING.
- ELECTRICAL SPECIFICATIONS:
IMPEDANCE: 75 OHMS
FREQUENCY RANGE: DC TO 6 GHz
RETURN LOSS: UP TO 1.5GHz. <-31 dB
UP TO 3GHz. <-24 dB
UP TO 6GHz. <-20 dB
- COMPLIANT TO SMPTE 424M (3G-SDI) SPECIFICATION.

REV	DESCRIPTION	BY DATE	APPD
G	ERO40866	03/15/12 BB	CY

P/N	DESCRIPTION	QTY
2065-E00-C7203N	SINGLE PACK	1
2065-E00-C7203NU	BULK PACK	100

MARKING:
KINGS+2065+CABLE CODE +
DATE CODE + LOCATION CODE

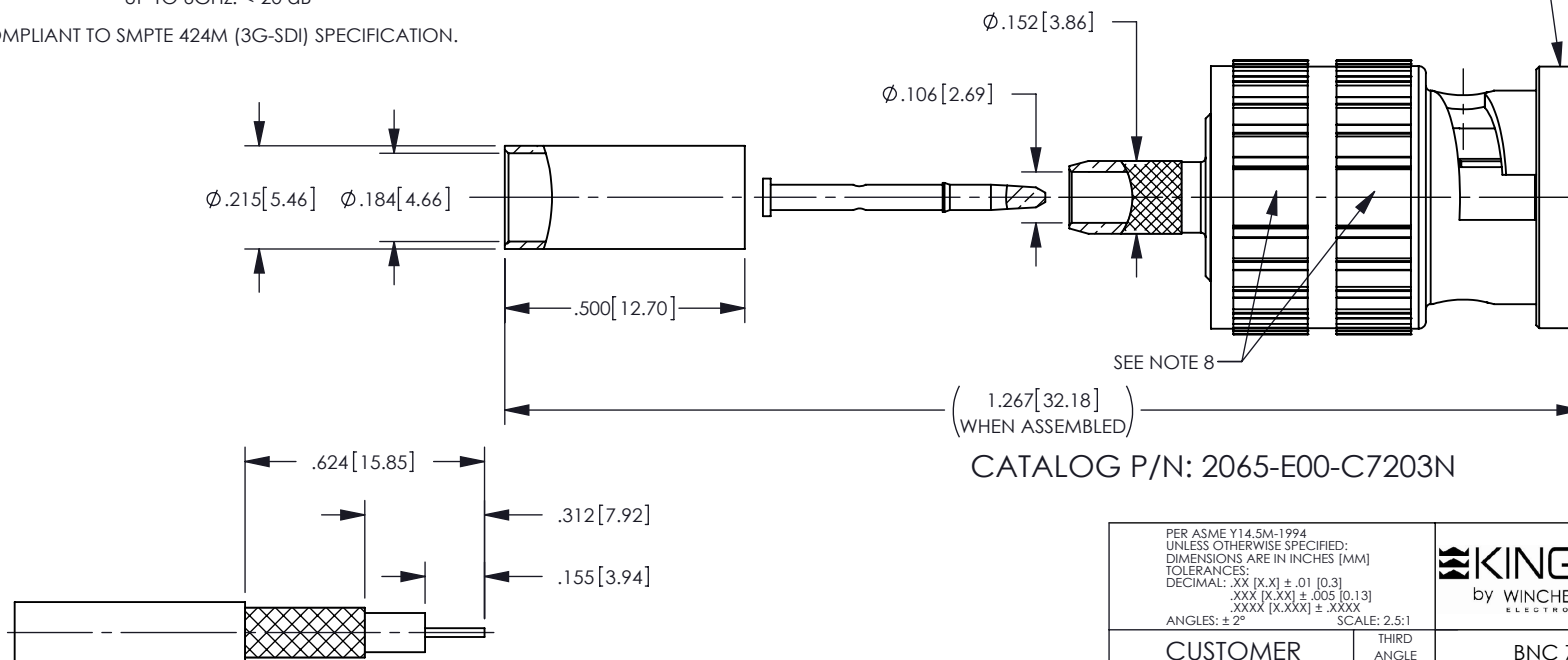

CATALOG P/N: 2065-E00-C7203N

RECOMMENDED CABLE TRIM DIMENSIONS

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: .XX [X.X] ± .01 [0.3] .XXX [X.XX] ± .005 [0.13] .XXXX [X.XXX] ± .XXXX ANGLES: ± 2° SCALE: 2.5:1				KINGS[®] by WINCHESTER ELECTRONICS Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492			
CUSTOMER SALES DRAWING				BNC 75 OHM PLUG FOR BELDEN 1855A OR EQUIVALENT (ROHS COMPLIANT)			
DRAWN CY	DATE 03/03/09	APPROVED CTC	DATE 03/03/09	A SD2065-E00-C7203N			
APPROVED XXX	DATE XX/XX/XX	APPROVED XXX	DATE XX/XX/XX	SHT 1	OF 1	REV G	