

## Aquia® Close Coupled Toilet, 1.6GPF & 0.9GPF

### FEATURES

- Dual-Max® flushing system, high-efficiency (1.6GPF/6.0LPF & 0.9GPF/3.4LPF)
- Elongated bowl
- Universal Height
- Close coupled, elongated front bowl and tank set, less toilet seat
- Chrome push-button
- 10" rough-in

### MODELS

- CST412MF.10

### COMPONENTS

- CT412F.10 - Elongated Front Bowl, 10" rough-in
- ST412M - Tank and Cover only
- SS204 SoftClose® seat (sold separately)
- SS114 SoftClose® seat (sold separately)

### COLORS/FINISHES

- Standard  
#01 Cotton

### PRODUCT SPECIFICATION

The two-piece, high-efficiency, universal height, Dual-Max flushing system toilet shall be 1.6GPF/0.9GPF. Toilet shall have 10" rough-in. Toilet shall have high-profile tank, elongated front bowl and chrome push-button. Toilet shall be TOTO Model CST412MF.10#01.



### D+ Dual-Max

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certifications: IAPMO(cUPC®), EPA WaterSense<sup>sm</sup>, State of Massachusetts, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative compliance: California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others



# CST412MF.10


## Aquia® Close Coupled Toilet, 1.6GPF & 0.9 GPF

### SPECIFICATIONS


- Water Use 1.6 GPF & 0.9GPF (6.0 LPF & 3.4LPF)
- Flush System Dual-Max®
- Min. Water Pressure 8 psi (flowing)
- Water Surface 6" x 4-1/2"
- Trap Diameter 2-1/8"
- Rough-in 10"
- Trap Seal 2-1/8"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight CT412F.10 - 78lbs  
ST412M - 30lbs
- Shipping Dimensions CT412F.10  
30-3/4" L x 17-3/8" W  
x 20-1/2" H  
  
ST412M  
17-1/4" L x 7-7/8" W  
x 17-1/2" H

### INSTALLATION NOTES

Back-to-Back Toilet Installations:  
TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

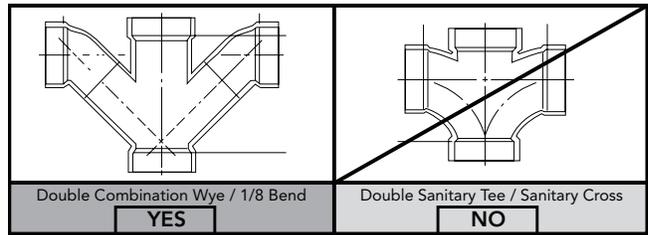

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 10" rough-in distance.

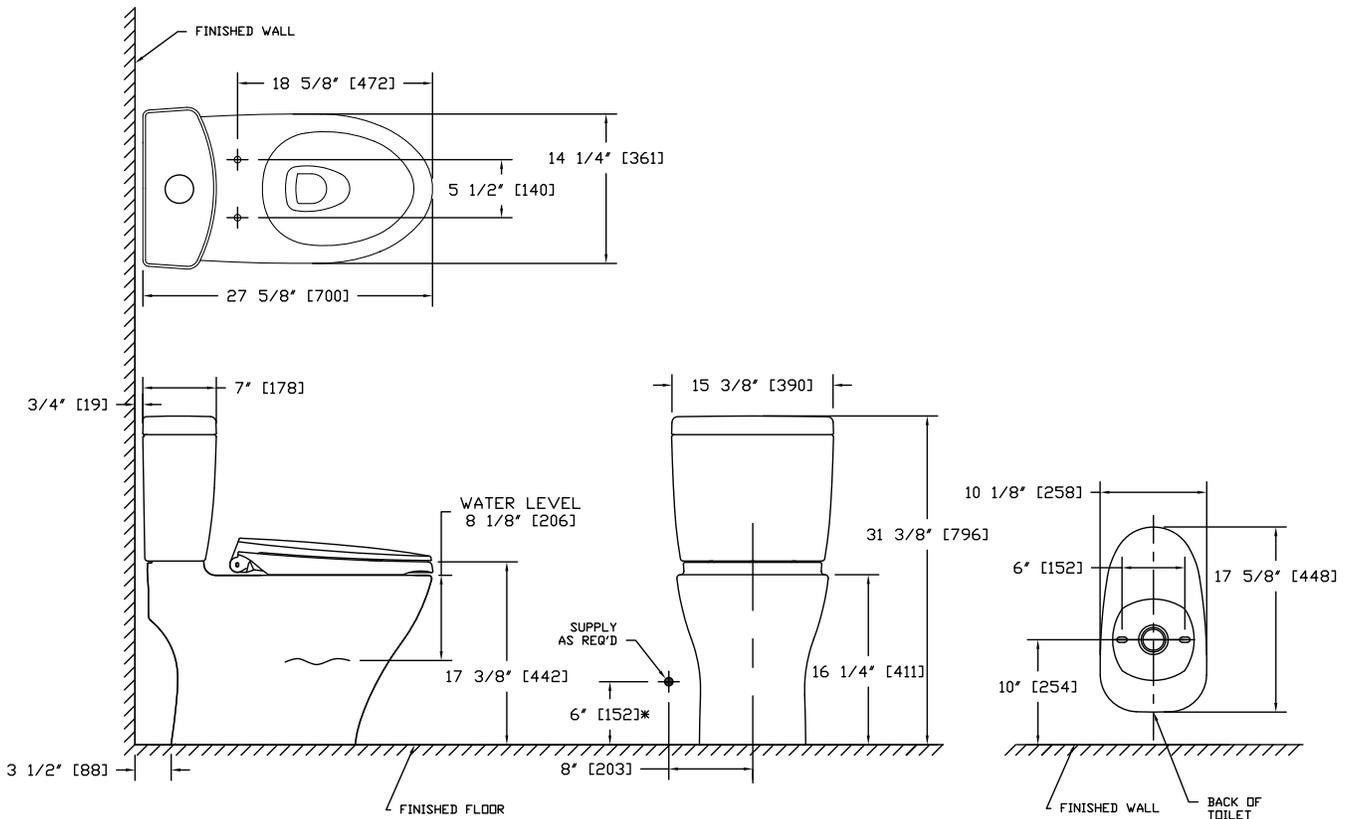

\*SUGGESTED DIMENSIONS

**TOTO**

*These dimensions and specifications are subject to change without notice*