

## GLASS DOOR COUNTERTOP MERCHANDISER FREEZERS

MODEL:  MXM1-2FHC  MXM1-2.5FHC  MXM1-3.5FHC  MXM1-4FHC



MXM1-2FHC



MXM1-2.5FHC



MXM1-3.5FHC



MXM1-4FHC

Maxx Cold Countertop Merchandiser Freezers are designed with a glass door to enhance product display. These energy efficient units include simple to use, programmable solid state digital controls that deliver accurate temperature regulation to preserve freshness and prolong product shelf life.

### FEATURES AND CONSTRUCTION


- Constructed of white painted steel exterior and ABS interior
- Triple-pane, self-closing glass door with magnetic compression gaskets
- Energy efficient interior LED lighting
- Bottom mounted compressor
- Adjustable heavy-duty PE-coated wire shelves
- Four (4) adjustable leveling feet
- Digital controls with LED temperature display
- Manual defrost cycle
- Provided with lock and key set for security
- Foamed urethane insulation to improve temperature regulation
- Equipped with integrated condensate evaporator therefore no drain line connection is needed

### NOMINAL STORAGE CAPACITY

|                   |                    |
|-------------------|--------------------|
| MXM1-2FHC .....   | 2.1 Cu Ft (59.5 L) |
| MXM1-2.5FHC ..... | 2.6 Cu Ft (73.5 L) |
| MXM1-3.5FHC ..... | 3.5 Cu Ft (102 L)  |
| MXM1-4FHC .....   | 4.2 Cu Ft (119 L)  |

### ELECTRIC

115V / 60Hz / 1Ph  
 (230V / 50-60Hz / 1Ph is available as an option)  
 6' (2m) NEMA 5-15P cord set included



NEMA 5-15P

### 3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 7



Intertek

Certified to ANSI UL 471



EPA Compliant



DOE 2017 Compliant


### TEMPERATURE

Holding temperature ..... 0°F to 10°F (-18°C to -12°C)

- Digitally controlled refrigeration system maintains optimum storage temperature

### MAXX COLD WARRANTY (USA / CANADA)

Contact Maxx Cold for warranty statement at  
 TechnicalServices@TheLegacyCompanies.com or 877.368.2797

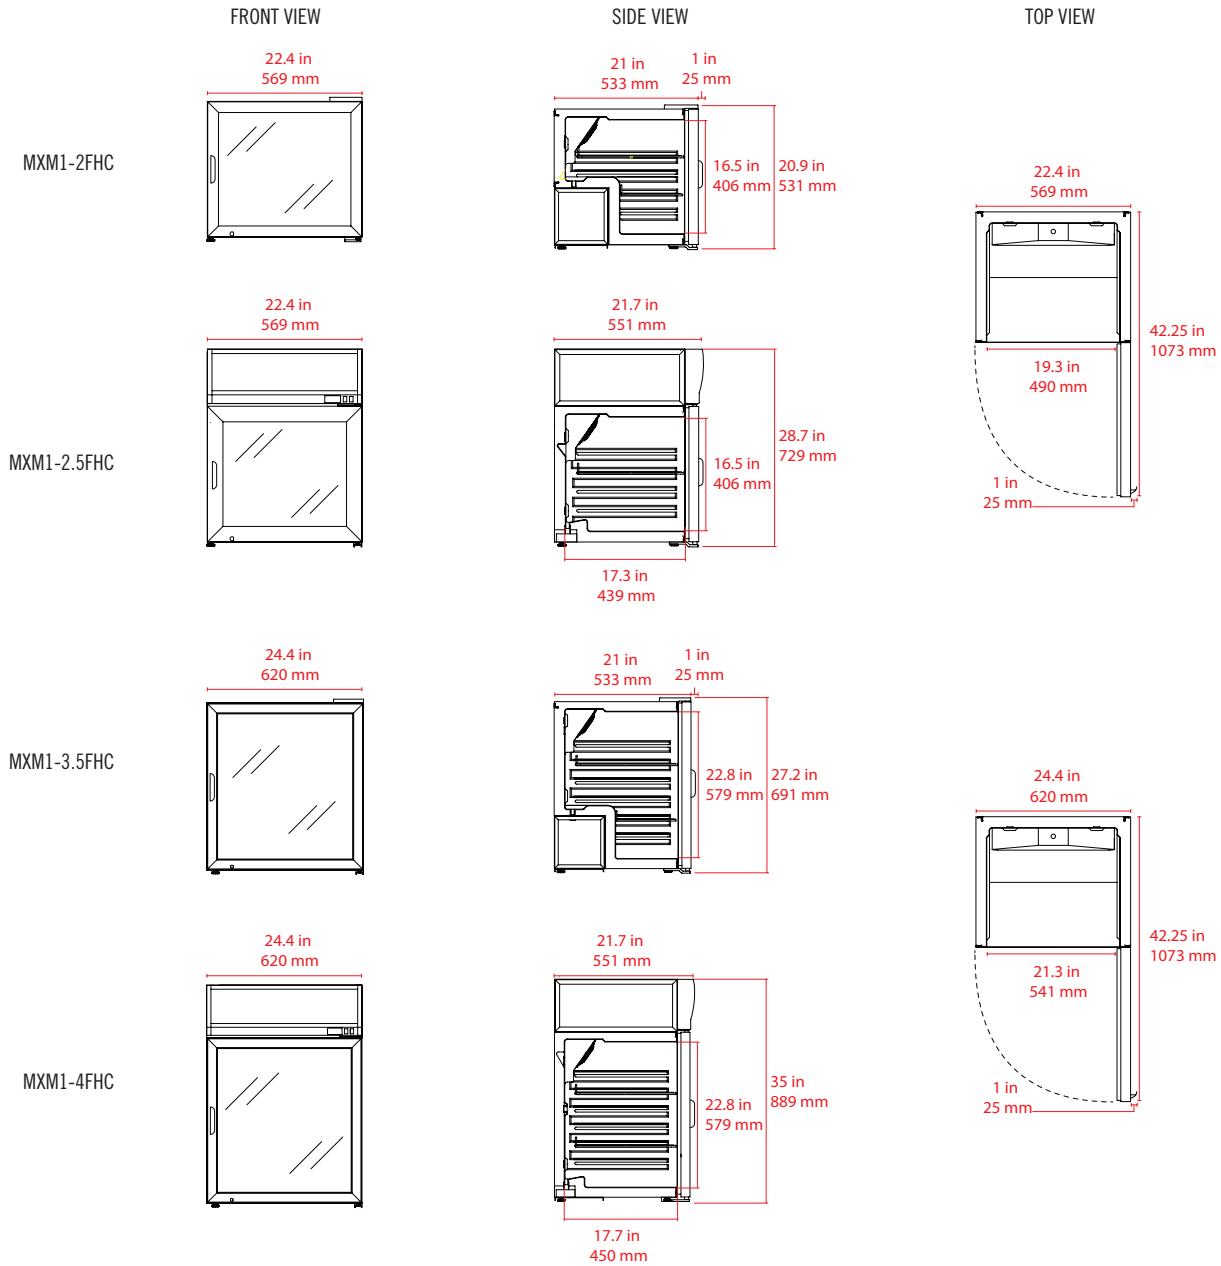

| MODEL       | EXTERNAL DIMENSIONS                         | INTERNAL DIMENSIONS                           | NOMINAL CAPACITY      | HOLDING TEMPERATURE RANGE       | AMP DRAW | UNIT WEIGHT          | REFRIGERANT AND CHARGE SIZE | DOORS / SHELVES | ELECTRICAL        |
|-------------|---|---|-----------------------|---------------------------------|----------|----------------------|-----------------------------|-----------------|-------------------|
| MXM1-2FHC   | 22.4" x 22" x 20.9"<br>(569 x 558 x 531 mm) | 19.3" x 17.3" x 16.5"<br>(490 x 439 x 406 mm) | 2.1 Cu Ft<br>(59.5 L) | 0°F to 10°F<br>(-18°C to -12°C) | 1.8A     | 101.4 lbs<br>(46 kg) | R-600A<br>1.59 oz (45 g)    | 1 / 2           | 115V / 60Hz / 1Ph |
| MXM1-2.5FHC | 22.4" x 22" x 28.7"<br>(569 x 558 x 729 mm) | 19.3" x 17.3" x 16.5"<br>(490 x 439 x 406 mm) | 2.6 Cu Ft<br>(73.5 L) | 0°F to 10°F<br>(-18°C to -12°C) | 1.8A     | 115 lbs<br>(52 kg)   | R-600A<br>1.59 oz (45 g)    | 1 / 2           | 115V / 60Hz / 1Ph |
| MXM1-3.5FHC | 24.4" x 22" x 27.2"<br>(620 x 558 x 691 mm) | 21.3" x 17.7" x 22.8"<br>(541 x 450 x 579 mm) | 3.5 Cu Ft<br>(102 L)  | 0°F to 10°F<br>(-18°C to -12°C) | 2.5A     | 123.5 lbs<br>(56 kg) | R-290A<br>2.29 oz (65 g)    | 1 / 3           | 115V / 60Hz / 1Ph |
| MXM1-4FHC   | 22.4" x 22" x 35"<br>(569 x 558 x 889 mm)   | 21.3" x 17.7" x 22.8"<br>(541 x 450 x 579 mm) | 4.2 Cu Ft<br>(119 L)  | 0°F to 10°F<br>(-18°C to -12°C) | 2.5A     | 143 lbs<br>(65 kg)   | R-290A<br>2.29 oz (65 g)    | 1 / 3           | 115V / 60Hz / 1Ph |

## INSTALLATION

- Units are equipped with leveling feet.