

Project:

Item Number:

Quantity:

FROZEN BEVERAGE / GRANITA COUNTERTOP DISPENSER (50HZ)


SCBF-168

SCBF-128

SCBF-118


ITEMS

- SCBA118-302** One 6-Liter Bowl
- SCBA128-302** Two 6-Liter Bowl
- SCBA168-302** Three 6-Liter Bowl
- SCBF118-302** One 10-Liter Bowl
- SCBF128-302** Two 10-Liter Bowl
- SCBF168-302** Three 10-Liter Bowl

FEATURES

- Magnetic drive & brushless motor system is reliable, durable and easy to use.
- Digital control allows user to customize settings for repeatable results and menu flexibility.
- Built-in timer to automatically put the machine in night mode
- Gasket-less spigot is easy to clean and maintain
- Standard double-wall bowls, ensuring virtually no condensation on the outside of unit
- Large compressor reduces freeze down times and promotes efficient operation.

DESCRIPTION

Stoelting's SCBA, SCBF Frozen Beverage / Granita Countertop Dispenser is designed for frozen granitas and dairy-based drinks including: iced or frozen coffee or tea, frozen cocktails, and more. The product offerings in single, double and triple bowl options allow for many frozen beverage menu options.



Every machine includes Stoelting's White Glove Service. One call does it all – customer service, technical service, parts or warranty information, installation, startup, sales, on-site service dispatch and much more. Available 24 hours a day, seven days a week year-round.

Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice and should not be used as installation specifications.

Approvals

Date

FROZEN BEVERAGE / GRANITA COUNTERTOP DISPENSER (50HZ)


DIMENSIONS

Front View


SCBA-118 &
SCBF-118



SCBA-128 &
SCBF-128

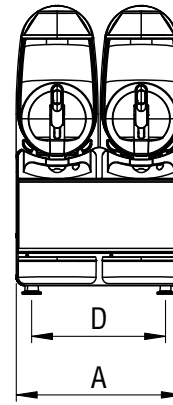


SCBA-168 &
SCBF-168

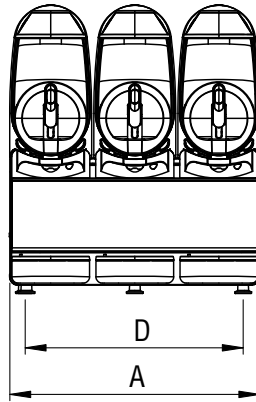

Side View

All Machines

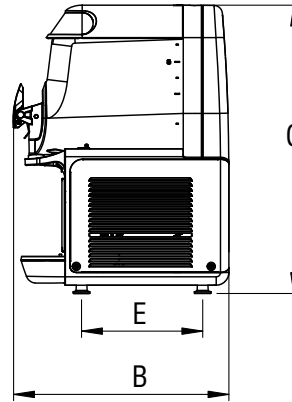

SPECIFICATIONS

Model Number	Bowl Capacity Gal (L)	Electrical				Cord with Plug (Included)	Compressor (Btu/hr)	Dimensions - in (cm)					Weight lb (kg)	Crated Weight lb (kg)
		Voltage	Hz	Phase	Amps			(A) Width	(B) Depth	(C) Height	(D) Foot-to-Foot	(E) Foot-to-Foot		
SCBA118-302	1 x 1.6 (6)	220-240	50	1	1.75	Schuko	920	7-7/8 (20)	18-7/8 (47.9)	24 (61)	5 (12.7)	11-3/8 (28.9)	58 (28.5)	62 (28.1)
SCBA128-302	2 x 1.6 (6)	220-240	50	1	3.00	Schuko	1700	15-5/8 (39.7)	18-7/8 (47.9)	24 (61)	12-1/2 (31.8)	11-3/8 (28.9)	96 (46)	102 (46.3)
SCBA168-302	3 x 1.6 (6)	220-240	50	1	3.50	Schuko	2100	23-5/8 (60)	18-7/8 (47.9)	24 (61)	20-1/2 (52.1)	11-3/8 (28.9)	122 (58)	138 (62.6)
SCBF118-302	1 x 2.6 (10)	220-240	50	1	2.40	Schuko	1200	7-7/8 (20)	18-7/8 (47.9)	27-7/8 (70.8)	5 (12.7)	11-3/8 (28.9)	61 (27.5)	70 (31.8)
SCBF128-302	2 x 2.6 (10)	220-240	50	1	4.10	Schuko	2100	15-5/8 (39.7)	18-7/8 (47.9)	27-7/8 (70.8)	12-1/2 (31.8)	11-3/8 (28.9)	99 (45.0)	109 (49.4)
SCBF168-302	3 x 2.6 (10)	220-240	50	1	5.10	Schuko	2800	23-5/8 (60)	18-7/8 (47.9)	27-7/8 (70.8)	20-1/2 (52.1)	11-3/8 (28.9)	129 (58.5)	154 (69.9)

- Indoor use only
- Maximum ambient temperature: 89°F (37.8 °C)
- Minimum clearance of 6" (15.2 cm) air space on all sides

- Details on CAD Revit Symbols Libraries are available on stoelting.klccad.com



Service Information
800-319-9549 (U.S. Toll Free)
920-894-2293 (Outside the U.S.)
www.stoeltingfoodservice.com
www.vollrath.com