

# 3M™ Outdoor Masking Poly Tape 5903



30 Day  
clean removal

UV and weather resistant for outdoor masking, holding, patching, bundling, marking, and more

With unique synthetic rubber adhesive, this polyethylene tape holds securely in many applications for as long as necessary and then removes without adhesive residue for up to 30 days.

## Many Construction or Maintenance Applications

- Masking against overspray or over spreading when applying stucco, EIFS, gel coat, and construction coatings
- Hold, patch, and seam heavy poly sheeting
- Protect surfaces during construction and remodeling such as brick, stonework, concrete, tile, window and doors frames, and painted or unpainted metal and wood
- Labeling or color coding with markable red surface
- Bundling pipe, conduit, and rebar

## Rugged outdoor performance

- Heavy-duty polyethylene backing
  - Conforms to rough and irregular surfaces
  - Resists UV and weathering deterioration
  - Waterproof
  - Pulls through stucco and EIFS
  - Resists abrasion
- Sticks tight on contact and stays tight on most surfaces found in outdoor construction and maintenance situations
- Removes cleanly from most opaque surfaces for up to 30 days even after exposure to the sun and rain
- Easy to unwind from the roll




# 3M™ Outdoor Masking Poly Tape 5903

## Product Information

Product	Color	Tape Structure (Backing/Adhesive)	Total Thickness mils (mm)	Adhesion to Steel oz/in width (N/100mm)	Tensile Strength lb/in (N/100mm)	Elongation	Size	Packaging	Rolls/Case	Cases/Pallet	UPC 0-51115-
5903	Red	Polyethylene/synthetic rubber	7.0 (0.18)	81 (89)	23 (403)	108	48mm x 54.8m (1.88 in x 60 yds)	Individual wrap	24	54	31842 9

**Note:** This technical information and data should be considered representative or typical only and should not be used for specification purposes.

## All-around protection

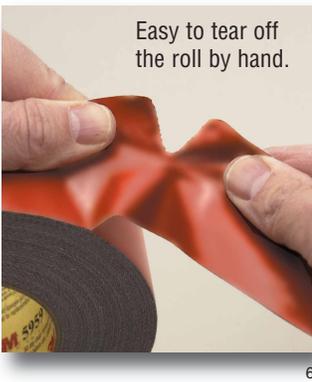

**PRODUCT USE:** All statements, technical information and recommendations contained in this document are based upon tests or experience that 3M believes are reliable. However, many factors beyond 3M's control can affect the use and performance of a 3M product in a particular application, including the conditions under which the product is used and the time and environmental conditions in which the product is expected to perform. Since these factors are uniquely within the user's knowledge and control, it is essential that the user evaluate the 3M product to determine whether it is fit for a particular purpose and suitable for the user's method of application.

**WARRANTY AND LIMITED REMEDY:** 3M warrants that each 3M product meets the applicable specifications at the time 3M ships the product. **3M MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE.** User is responsible for determining whether the 3M product is fit for a particular purpose and suitable for user's application. If the 3M product is defective, your exclusive remedy and 3M's and seller's sole obligation will be, at 3M's option, to repair or replace the product or refund the purchase price. **LIMITATION OF LIABILITY:** Except where prohibited by law, 3M and seller will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.

### Industrial Business Industrial Adhesives and Tapes Division

3M Center Bldg. 21-1W-10  
900 Bush Ave.  
St. Paul, MN 55144  
1-800-362-3550  
[www.3M.com/industrialtapes](http://www.3M.com/industrialtapes)

3M is a trademark of 3M Company.

Printed in U.S.A.  
© 2008 3M  
70-0711-0204-3