


YOUR AUTHORIZED CONTINENTAL DEALER

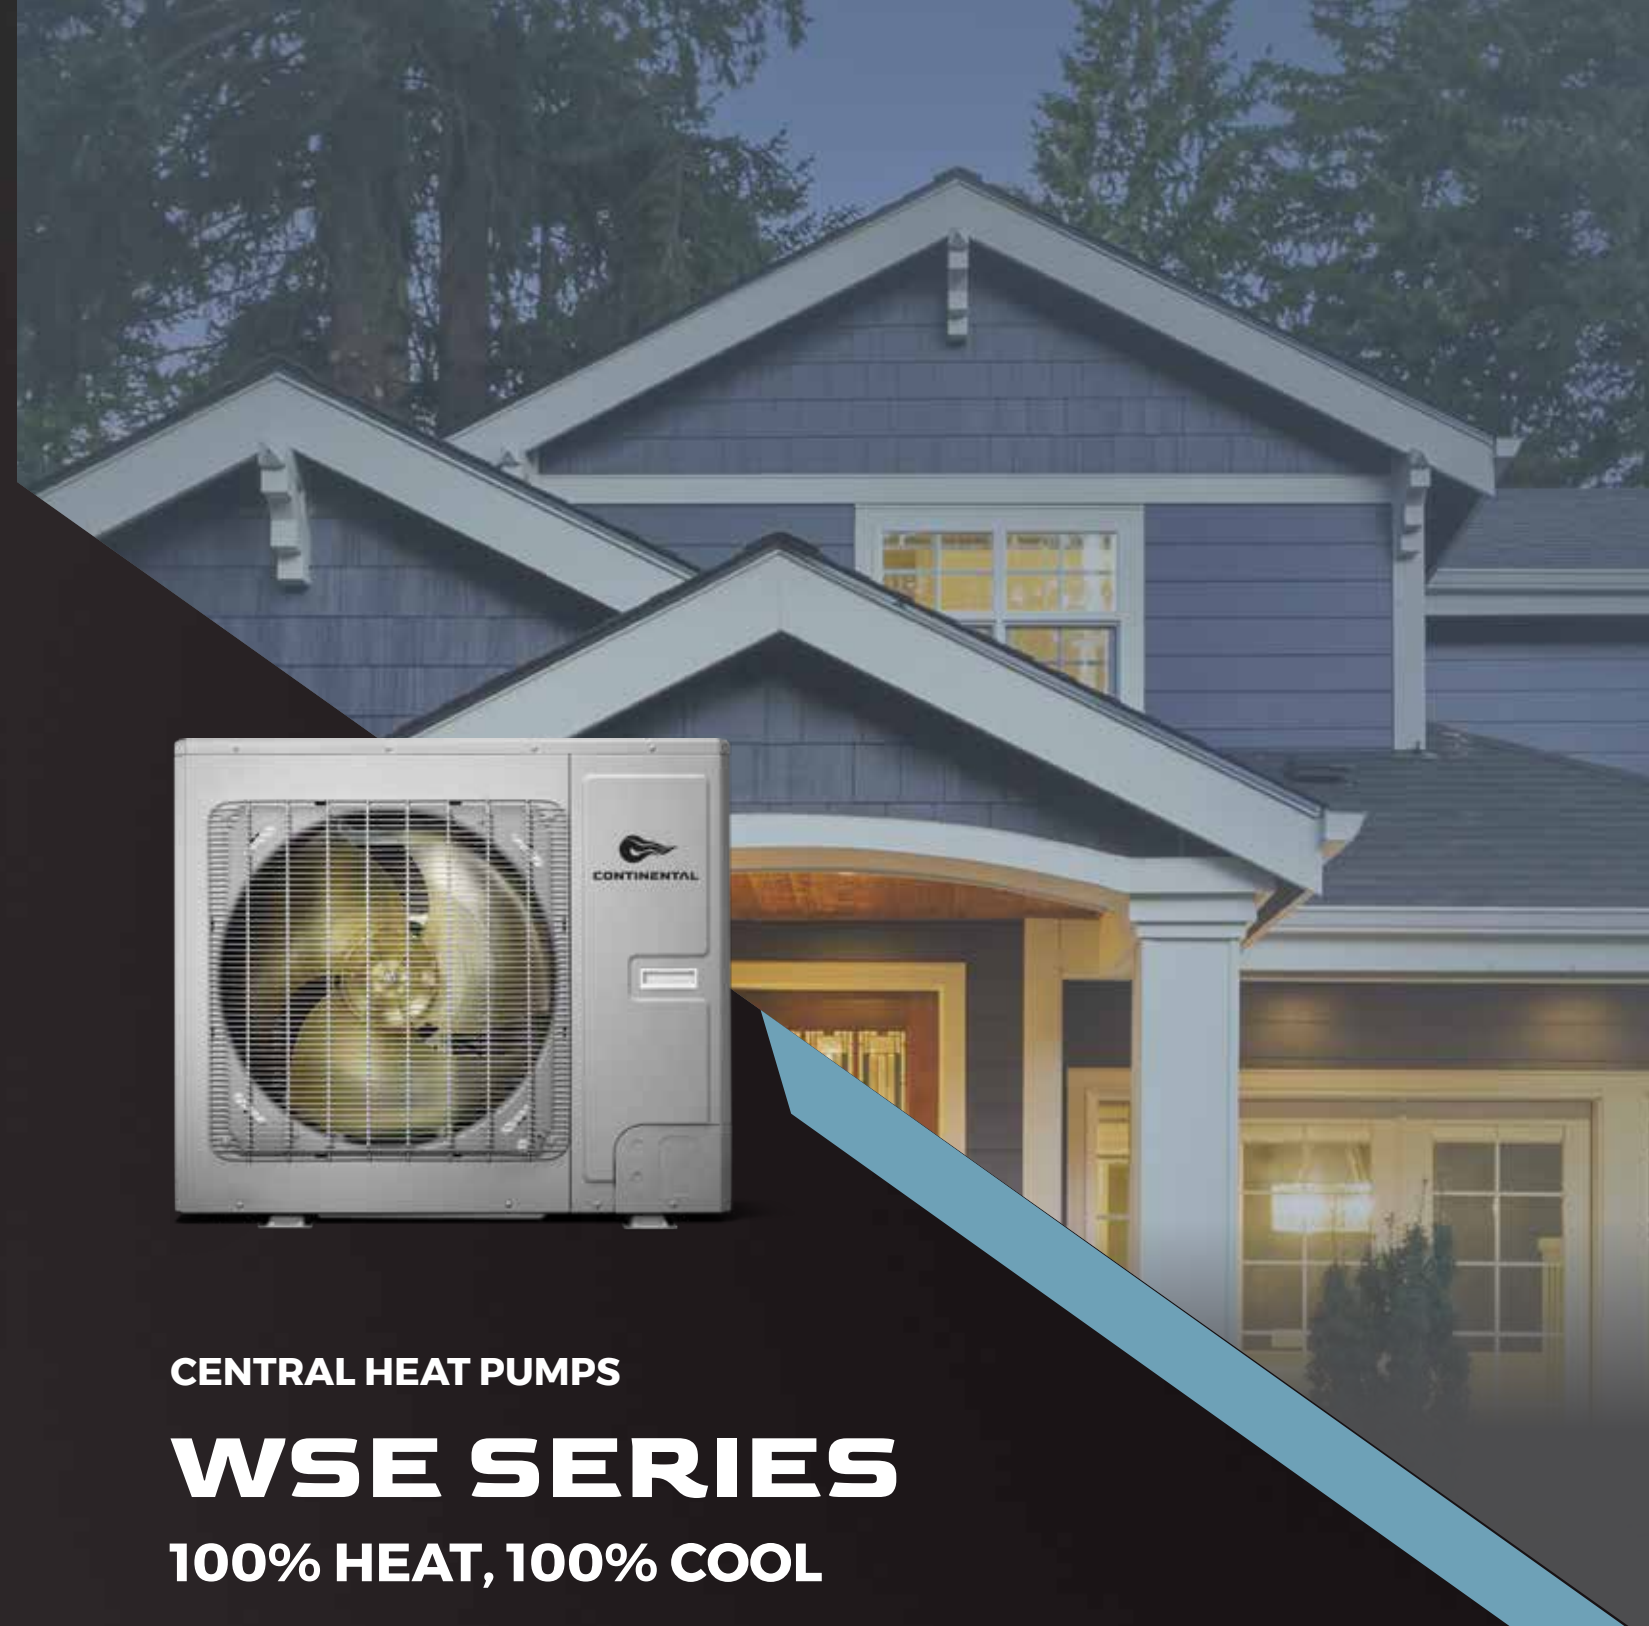

CENTRAL HEAT PUMPS

WSE SERIES

100% HEAT, 100% COOL

CONTINENTAL

P: 1-866-820-8686
continentalcomfort.com

Consult your owner's manual for complete installation instructions, accurate framing dimensions and proper clearances to combustible material. Check all local and national building codes. All specifications are subject to change without prior notice due to on-going product improvements. Products may not be exactly as shown.

Build **Quality**, Build **Confidence**.
continentalcomfort.com



CONTINENTAL

WSE SERIES

Efficiency At It's Best

WINTER TEMPERATURE APPROVED

The Continental Cold Climate Air Source Heat Pumps operate in both summer and winter to meet a wide range of home comfort needs throughout the year.

WHISPER QUIET™ Operation

Contoured blades provide quieter operation and efficient air flow

REDUCE CARBON FOOTPRINT

Our Heat Pumps will also help to reduce your carbon footprint for a cleaner future. When paired with a furnace, the combined unit will function as a hybrid heat system resulting in energy cost savings.

FEATURES

- 2 to 5 tons of heating & cooling capacity.
- Featuring the widest heating and cooling range available in the industry. Provide heating for your home when temperatures dip down as low as -30°C (-22°F) as well as comfortable cooling when temperatures reach as high as 54°C (129.2°F).
- Entire unit tested in factory before shipment.
- Can be installed on the wall to save space.
- Low vibration design for quiet operation.
- Compatible with any furnace or coil match ups with a controller having 24V communication.

EASY ACCESSIBILITY AND SERVICING



ENERGY STAR RATED

Energy star rated
Statement about
Energy star features
and benefits



WHISPER QUIET™ Operation

Contoured blades provide quieter
operation and efficient air flow



SPECIFICATIONS

PART ID	WSEHV2436RA1-C	WSEHV4860RA1-C
Ton	2T-3T	4T-5T
SEER2 Rating	17 (2T), 16 (3T)	17 (4T), 15.8 (5T)
HSPF2 Rating (Region IV)	9 (2T), 9 (3T)	9 (4T), 9 (5T)
HSPF2 Rating (Region V)	7 (2T), 7 (3T)	7 (4T), 7 (5T)
Max. Fuse / Breaker (A)	35	45
Cooling Capacity (BTU/H)	24,000 - 36,000	48,000 - 54,000
Heating Capacity (BTU/H)	24,000 - 36,000	48,000 - 54,000
Line set Diameters Liquid (in)	3/8	3/8
Line Set Diameters Suction (in)	3/4	3/4
DIMENSIONS		
Width (in)	37	39 3/8
Height (in)	32 1/4	53 3/4
Depth (in)	18 1/2	14 1/2
Weight (Lbs)	240	337

10
YEAR
HEAT EXCHANGER,
PARTS AND UNIT
REPLACEMENT
LIMITED WARRANTY