

# 9" to 16" Adjustable Pipe Support Bracket System

Job Name \_\_\_\_\_  
 Location \_\_\_\_\_  
 Engineer \_\_\_\_\_  
 Contractor \_\_\_\_\_  
 Tag \_\_\_\_\_ PO# \_\_\_\_\_

## Specifications

- Bracket adjusts to fit 9" to 16" openings
- Telescoping bracket features exterior pilot holes for securing clamps or fittings
- Clamp bridge adjusts to securely fit 1/4"-1" CTS
- Bracket is constructed of durable 20-gauge galvanized steel
- Maximum temperature is 210°F

## Applications

- Supply
- DWV (Drain, Waste, And Vent)

## Materials

- Nylon
- Galvanized Steel
- TPE

## Certifications/Listings/Approvals

- IAMPO

## Load Ratings



BRACKET SPAN	LOAD (LBS)
9	90
12	82
15	66

## Dimensions

PART NO.	A	B	C	D	E
Bracket	.098"	0.15"	N/A	N/A	N/A
Clamp	N/A	N/A	1.71"	.25" - 1.13"	2.00"

## Product Offerings

PART NO.	BRACKETS	CLAMPS	SCREWS
B001	N/A	1	N/A
B0916	1	N/A	N/A
B160001	1	1	N/A
B160002	1	2	N/A
B160003	1	3	N/A
B160402	1	2	4
B160403	1	3	4
B160601	1	N/A	6

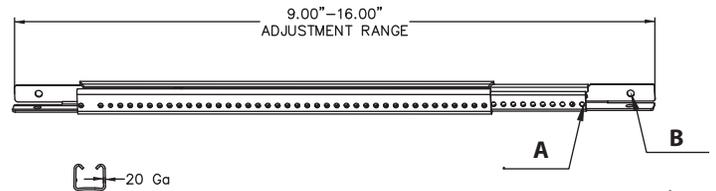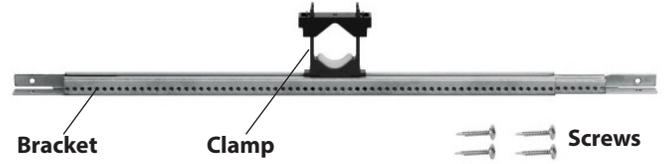

**Note-** To meet the minimum load requirements, you must have a 2" overlap in the center of the bracket.

