
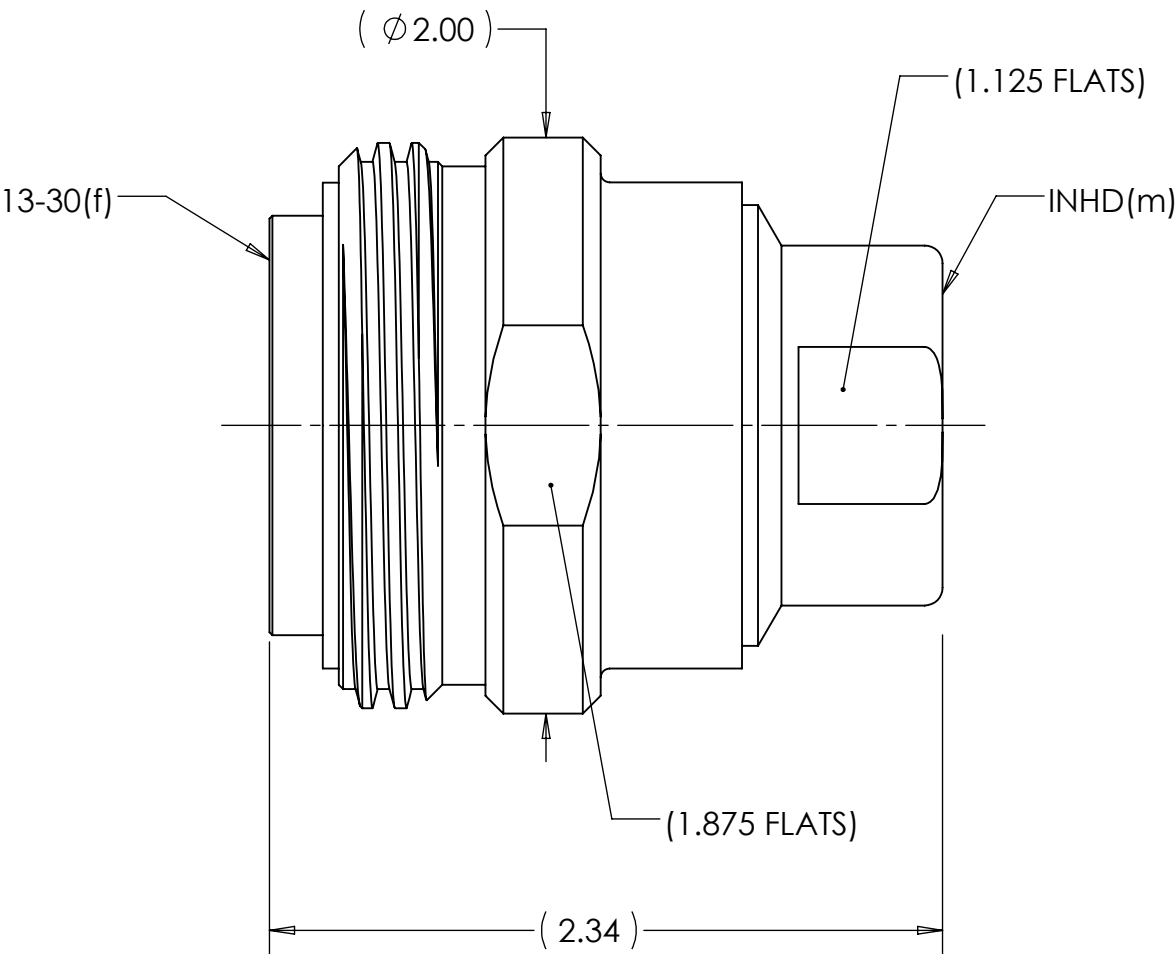


This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	06/17/14	AM



ENGINEERING DATA:



ELECTRICAL:
IMPEDANCE: 50 OHMS NOMINAL

MECHANICAL:
INTERFACE: 13-30(f) PER IEC 60169-5
IHND(m) PER TRU SPEC

MATERIAL:
CENTER CONTACTS: BERYLLIUM COPPER & BRASS
INSULATORS: PTFE
GASKET: SILICONE RUBBER
BODIES: BRASS

FINISH:
CENTER CONTACTS: SILVER PLATED
BODIES: NICKEL PLATED

- NOTES:
- UNLESS OTHERWISE SPECIFIED; ALL DIMENSIONS ARE FOR REFERENCE ONLY.
 - INHD(m) MATES WITH TRU HIGH POWER TEST CABLE ASSEMBLY.

MATERIAL	DO NOT SCALE DRAWING	DRAWN AM	DATE 06/16/14	 TRU Corporation 245 Lynnfield St, Peabody, MA 01960
		ENG APPR. AM	DATE 06/16/14	
		MFG APPR.	DATE	
		OTHER APPR.	DATE	
COMMENTS:	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONS: $\pm 1/64$.XX : $\pm .01$.XXX: $\pm .005$ ANGLES: $\pm 1/2^\circ$ MACHINED SURFACES: 63/	THIRD ANGLE PROJECTION 		TITLE: CONNECTOR, COAXIAL 13-30(f) REPLACEABLE CONNECTOR
		SIZE B	DWG. NO. TRU-12711	REV -
surface area: sq inch	weight: 0.89 lbs	CAGE CODE: 92180		SCALE: 3:2 SHEET 1 OF 1