

TROPHY[®] H2O



Fast-Cure, High-Solids, One-Coat, High-Performance Gym Finish



TROPHY[®] H2O

2-Component, High-Solids, Water-based Gym Finish

1


High-Solids - One-Coat Coverage

The high 36% solids content delivers one-coat coverage that saves application time and uses less product, which lowers cost and improves results.



Exceptional Clarity & Depth

Other finishes distort the natural color of the wood and can alter the true color of game lines and painted logos. Trophy H2O's clarity and depth keeps colors true.

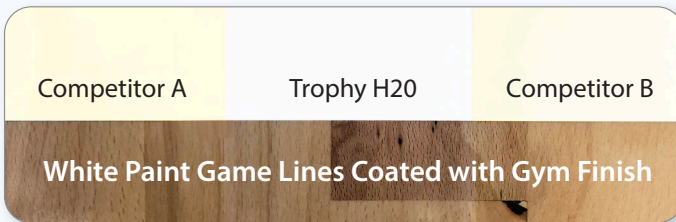

Quadra-link Technology For Durability

Proprietary polymer technology delivers a tougher coating with a faster cure time by having up to 4-times the cross-linking capability of typical 2K systems.



Fast Cure Time - Less Downtime

Quadra-link technology not only delivers durability, it helps Trophy H2O cure faster than traditional finishes. Under normal conditions, Trophy H2O will be 95% cured and ready for play in 72 hours!



Water-Based - Low Odor - Low VOC's

Trophy H2O's virtually odorless application, and a VOC level under 250, minimizes the impact on your facilities environment.

The Problem

Wood sports floors must be refinished regularly to protect the surface and keep athletes safe. Refinishing requires prep work and downtime. And often, two coats of finish are required to achieve an acceptable level of finish to protect the floor and get a deep gloss look. Oil-based finishes require even more prep work and downtime to cure, and they release a much heavier odor in the facility.

The Solution

Trophy H2O is a water-based, high solids gym finish with an easy prep process, low odor, faster cure time, and high durability.

Simple Prep

Surface Preparation Pads (SPP) are used to prep the floor and provide adhesion for the new finish. SPPs deliver the right amount of abrasion without creating swirl marks like traditional screen prep methods can if not done correctly.

Easy Application

Trophy H2O has been formulated to make application smooth and forgiving. It's a high-solids gym finish that applies like a low-solids finish.

Specifications

1.5 Gallon Pack	HIL0027635
5 Gallon Pack	HIL0027672
Coverage Rate Per Gallon	500 - 550 sq/ft
Dry-time	4-6 Hours
Open for use	72 Hours
Volatile Organic Compounds	< 250 g/l
Non-Volatile Matter (Solids)	36%



HILLYARD
First In Gym Finishes[®]

PO Box 909
St. Joseph, MO 64502
www.hillyard.com