

Thank you for purchasing a BOSS Audio Systems product. Please read through these instructions carefully so you will know how to install this product properly.


### Package Contents

- 1x Marine radio cover
- 4x Mounting screws and clip nuts
- Installation Instructions and warranty

### Introduction and Features

- Mounting cut-out in the dash (W x H): 8.7" x 3.3" ( 220 x 83 mm)
- Fits single DIN head units (W x H): 7" x 2.0" (178 x 51 mm)
- Marine radio cover dimensions (W x H x D): 10" x 4.1 x 2.6" (249 x 105 x 67 mm)
- Push button activates auto-slide lens cover (spring activated door)
- UV-stabilized ABS plastic housing
- Impact-resistant ABS
- Sealed with an EVA gasket

### Product Overview

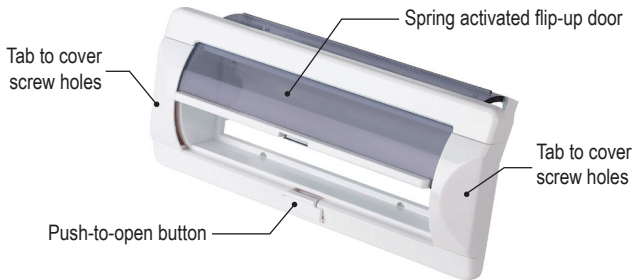


## Installation

### Step 1

Remove two plastic tabs on the front of the marine radio cover to access four mounting screw holes. You need to fasten the radio cover to the dash through the screw holes.

**Note:** Use a plastic prying tool to remove the tabs. Exercise caution when prying the tabs off to prevent damage on the radio cover.

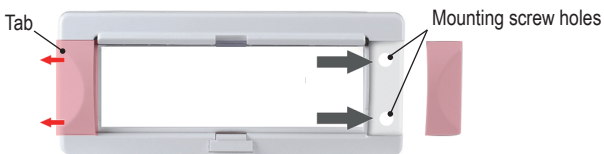

### Step 2


Attach your head unit to the radio cover through the opening of the radio cover. The opening fits a 7" x 2.0" head unit (single DIN). Make sure the head unit is securely attached.



### Step 3

Secure the radio cover in the dash through four screw holes (as described in Step 1) using four supplied screws and clip nuts. The cut-out in the dash is 8.7" x 3.3" (W x H).

**Note:** The top of the radio cover needs extra clearance, so that the spring-activated door can glide smoothly to the open position (top opening).

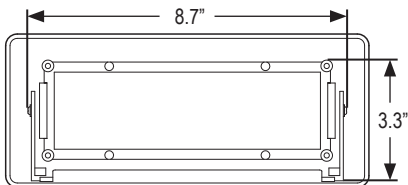

(Back view)