
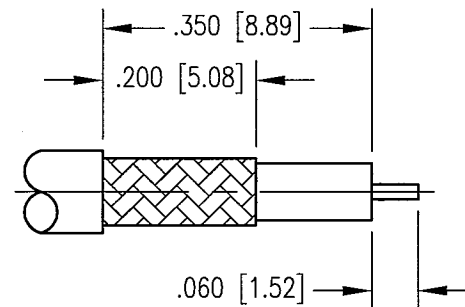


DWG. NO.		362-900-0630H	
REV	DESCRIPTION	BY DATE	APPD
A	RELEASED PER ECR 7405	JED 7/10/02	JED

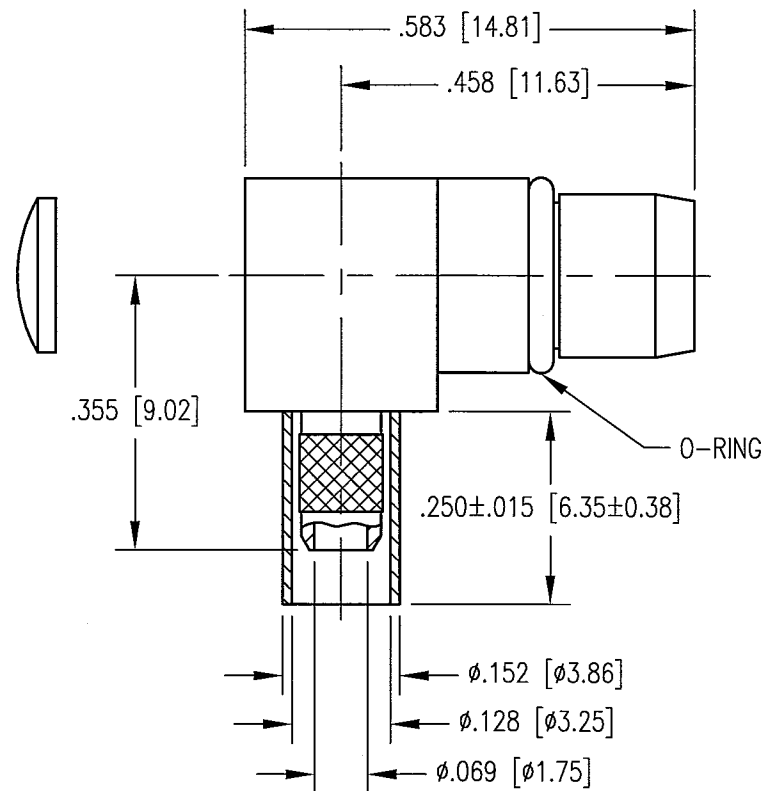

CABLE TRIMMING DIMENSIONS

NOTES:

1. MATERIALS:

ALL METAL PARTS: BRASS PER ASTM B16
INSULATOR: TEFLON PER ASTM D1710
O-RING: SILICONE RUBBER PER ZZ-R-765

2. FINISH:

CENTER CONTACT: .000030 MIN. GOLD PER MIL-G-45204 OVER
.000050 MIN. NICKEL PER QQ-N-290
BODY: .000015 MIN. GOLD PER MIL-G-45204 OVER
.000050 MIN. NICKEL PER QQ-N-290
ALL OTHER METAL PARTS: .000005 MIN. GOLD PER MIL-G-45204 OVER
.000050 MIN. NICKEL PER QQ-N-290

3. FOR USE WITH RG-316 CABLE OR EQUIVALENT.

4. FOR CABLING PROCEDURES USE CAP 9-12 WITH TRIMMING DIMENSIONS SHOWN.

5. CRIMP FERRULE USING .128 HEX DIE.

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMALS .XX ± .01 [0.254] .XXX ± .005 [0.127] ANGLES ± 2° SCALE: 4:1		NORTHROP GRUMMAN Winchester Electronics 400 Park Road Watertown, CT 06795	
CUSTOMER DRAWING		TITLE BMA RIGHT ANGLE PLUG	
DRAWN JED	DATE 7/10/02	CHECKED JED	DATE 7/10/02
APPROVED JED	DATE 7/10/02	APPROVED JED	DATE 7/10/02
A 362-900-0630H		SMT. 1	OF 1
REV. A		REV. A	