

BOSS[®]
AUDIO SYSTEMS



BOSS[®]
AUDIO SYSTEMS



MCBK425BA USER'S MANUAL
BLUETOOTH[®] | 3" (76 mm) WEATHER RATED
SPEAKER AND AMPLIFIER SYSTEM
FEATURING BUILT-IN AMPLIFIER



BOSS Audio Systems
3451 Lunar Court • Oxnard, CA 93030
www.bossaudio.com
805-751-4853 Customer Service
Tech Support: www.bossaudio.com/support



0621

The Bluetooth[®] word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by BOSS Audio Systems is under license. Other trademarks and trade names are those of their respective owners.

MCBK425BA Motorcycle/UTV Amplified Speaker System

Specifications

Operation Voltage	10~ 16 V
Total Harmonic Distortion	<0.1%
Signal-to-Noise	>75 dB
Channel Separation	>50 dB
Frequency Response	50Hz - 15KHz
Speaker Wires	5.5'
Volume Control Wire	4.9'
Audio Input Cable	0.8'
Power Cable	5.5'
In-Line Fuse/Power Cable	4.9'
Clamp Size Range	0.75" ~1.25"
Fuse Rating	7.5A

Bluetooth

To pair and connect your Bluetooth device to the MCBK425BA
Enter Settings > Bluetooth Menu > Search > “ Boss Audio
MCBK425BA” >If Prompted to enter a passcode enter : “0000”

MCBK425BA Motorcycle/UTV Amplified Speaker System

Contents

High-Performance, Weatherproof Speakers	2 PCS
Speaker Clamp Mounting Hardware	1 PAIR
Rubber Mounting Shims	4 PCS
Power Plug with Fuse	1 PC
Users Manual	1 PC

Features

- On/Off Switch
- Aux-In (3.5 mm)
- Speaker Clamp Mounts
- Weatherproof Volume Control
- High-Impact, High Temperature Speaker Enclosures
- Weatherproof Speakers
- Bluetooth® Audio Streaming

MCBK425BA Motorcycle/UTV Amplified Speaker System

Installation


1. Screw the clamps to the bottom of the speakers.
2. Find a safe, ideal mounting location and fit the clamps over the chosen mounting bars.
3. Fasten the mounting screws after you review the safety of the mounting location.

Wiring

- 1) Remove the seat.
- 2) Route the fused power leads to the battery. (*keep away from moving parts and/or hot exhaust*)
- 3) Connect the RED ring terminal to the +12V post of the battery.
- 4) Connect the BLACK ring terminal to ground post of the battery.
- 5) Connect to the connector the white mating connector leading the speaker.


Power Switch

- 1) The switch is used to Power On/off the system.
- 2) It can be mounted near the volume control for easy access.
- 3) Reinstall the seat.

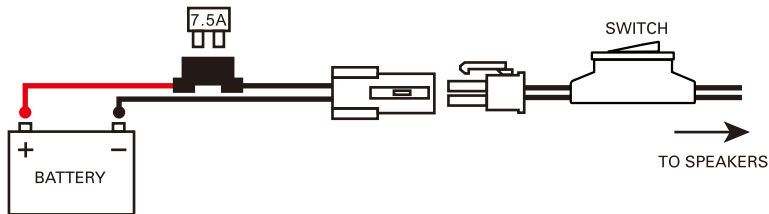

MCBK425BA Motorcycle/UTV Amplified Speaker System

Connections

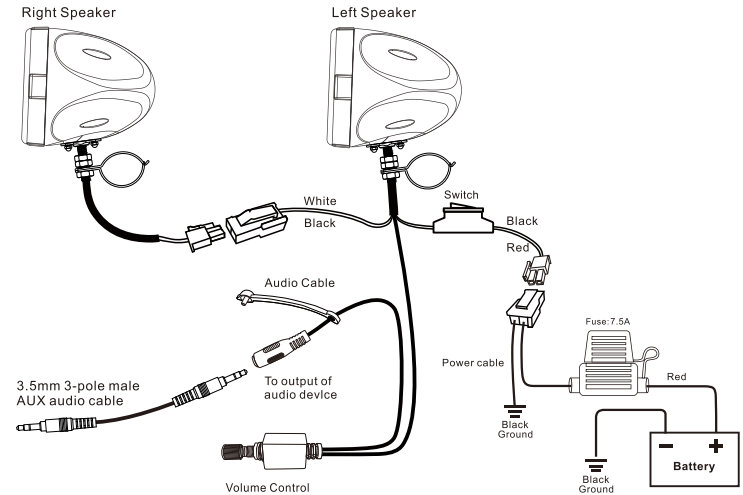

Note:

1. AUX 3.5 female input connector for output of other audio device like mobile phone, MP3, Ipad and so on.
2. Should use standard 3.5mm 3-pole male plug AUX cable (not included).
3. Stop BT connection first when using the 3.5mm AUX input as an audio source input.

Amplifier and Loudspeaker Mounting Installation Reminder

The components and wiring should not be installed around any moving parts, keep away from ignition parts, fuel lines, or any hot exhaust.

Speakers should not be installed where they might inhibit safety features on the vehicle (i.e. lights, horns, brake levers, etc...).

