

Catalog Number	
Notes	Type

FEATURES & SPECIFICATIONS

INTENDED USE

For use in Non-IC applications with LP6F rough-in.

Wallwash reflector intended to direct light with a horizontal component to increase light intensity on walls, as well as provide downward light on horizontal surfaces. Kicker must face wall to be illuminated.

CONSTRUCTION

Aluminum reflector with kicker.

Diffuse kicker used for wallwash.

Integral flange.

FINISH

Anodized reflectors available in clear specular and clear diffuse.

INSTALLATION

Socket-to-trim interface.

Retaining clips packed with reflector for installation on rough-in.

Maximum ceiling thickness 1-1/2".


LISTING

U.L. Listed to U.S. and Canadian safety standards.

Damp location listed.

6" Finishing Reflector

6W7

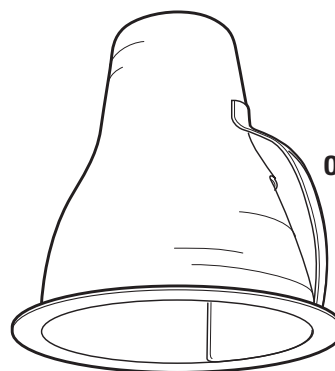


OPEN WALLWASH WITH KICKER
Vertical Lamp

Specifications

Height: 9 (22.9)

Lamp Opening: 6-1/4 (15.9)

Diameter: 7-1/2 (19.1)



All dimensions are inches (centimeters).

ORDERING INFORMATION

For shortest lead times, configure product using **standard options (shown in bold)**.

Example: 6W7


6W7		
Series	Finish	Options
6W7	AZ Clear specular	TRW White flange with anodized reflectors
	A Clear diffuse	
	PR Pewter	
	GZ Gold specular	
	WTZ Wheat specular	

Housing Compatibility

Housing and trim ordered separately.

Application	Source	Maximum wattage	Housing
Non-IC	Fluorescent	32 TRT	LP6F

6W7 6" Wallwash Full Reflector Trim



Footcandle values are initial and tables are based on a minimum of 6 units.
For fixture-to-wall distance other than those shown, use maximum of 1 to 1 spacing (distance between fixtures not more than distance to wall) for best results.

WALLWASH ILLUMINANCE STUDY

Footcandles on Wall from 6 luminaires

6W7A, 32W TRT lamp, 2400 rated lumens,
test no. LTL11817

ft. from ceiling	Units 3' From Wall			Units 4' From Wall			Units 5' From Wall		
	Fixture	Center	Fixture	Fixture	Center	Fixture	Fixture	Center	Fixture
1	10.4	9.7	10.4	8.6	6.4	8.6	7.9	4.3	7.9
2	19.5	18.5	19.5	16.1	12.4	16.1	14.6	8.4	14.6
3	22.7	21.9	22.7	18.1	15.3	18.1	16.0	11.0	16.0
4	22.0	22.0	22.0	16.5	16.7	16.5	13.9	12.7	13.9
5	19.0	19.3	19.0	14.6	14.5	14.6	11.4	11.8	11.4
6	15.9	15.9	15.9	12.0	12.2	12.0	9.7	9.7	9.7
7	13.0	13.0	13.0	9.8	10.1	9.8	7.9	8.0	7.9
8	10.5	10.7	10.5	8.2	8.2	8.2	6.5	6.7	6.5
9	8.5	8.7	8.5	6.8	6.8	6.8	5.4	5.6	5.4
10	7.0	7.1	7.0	5.6	5.7	5.6	4.6	4.6	4.6
11	5.7	5.8	5.7	4.7	4.8	4.7	3.9	3.9	3.9
12	4.7	4.8	4.7	4.0	4.1	4.0	3.4	3.4	3.4

WALLWASH ILLUMINANCE STUDY

Footcandles on Wall from 6 luminaires

6W7A, 18W TRT lamp, 1200 rated lumens,
test no. LTL11818

ft. from ceiling	Units 3' From Wall			Units 4' From Wall			Units 5' From Wall		
	Fixture	Center	Fixture	Fixture	Center	Fixture	Fixture	Center	Fixture
1	4.0	3.7	4.0	3.2	2.5	3.2	3.0	1.7	3.0
2	6.0	5.8	6.0	4.7	4.0	4.7	4.2	2.8	4.2
3	6.7	5.9	6.7	5.4	4.0	5.4	4.8	3.0	4.8
4	7.4	7.6	7.4	5.7	5.7	5.7	5.1	3.9	5.1
5	7.3	7.1	7.3	5.3	5.6	5.3	4.3	4.5	4.3
6	6.3	6.3	6.3	4.8	4.7	4.8	3.7	3.9	3.7
7	5.3	5.4	5.3	4.1	4.1	4.1	3.3	3.2	3.3
8	4.5	4.6	4.5	3.4	3.5	3.4	2.8	2.7	2.8
9	3.7	3.8	3.7	2.9	2.9	2.9	2.3	2.4	2.3
10	3.1	3.2	3.1	2.5	2.5	2.5	2.0	2.0	2.0
11	2.6	2.7	2.6	2.1	2.1	2.1	1.7	1.7	1.7
12	2.2	2.3	2.2	1.8	1.8	1.8	1.5	1.5	1.5

WALLWASH ILLUMINANCE STUDY

Footcandles on Wall from 6 luminaires

6W7A, 18W DTT lamp, 1250 rated lumens,
test no. LTL11819

ft. from ceiling	Units 3' From Wall			Units 4' From Wall			Units 5' From Wall		
	Fixture	Center	Fixture	Fixture	Center	Fixture	Fixture	Center	Fixture
1	4.7	4.3	4.7	3.9	2.8	3.9	3.5	1.9	3.5
2	9.0	8.6	9.0	7.3	5.8	7.3	6.7	4.0	6.7
3	10.3	9.9	10.3	8.0	7.1	8.0	7.1	5.1	7.1
4	9.9	10.0	9.9	7.5	7.6	7.5	6.2	5.8	6.2
5	8.7	8.8	8.7	6.6	6.6	6.6	5.3	5.3	5.3
6	7.2	7.3	7.2	5.5	5.5	5.5	4.4	4.4	4.4
7	5.8	6.0	5.8	4.5	4.5	4.5	3.6	3.6	3.6
8	4.7	4.9	4.7	3.7	3.7	3.7	3.0	3.0	3.0
9	3.8	3.9	3.8	3.0	3.1	3.0	2.5	2.5	2.5
10	3.1	3.2	3.1	2.5	2.6	2.5	2.1	2.1	2.1
11	2.6	2.6	2.6	2.1	2.2	2.1	1.8	1.8	1.8
12	2.1	2.2	2.1	1.8	1.8	1.8	1.5	1.5	1.5



An Acuity Brands Company