




High Temperature Protective Bags and Sheets for paint overspray

Masking film with reliable performance in bake cycles up to 315°F (157°C)

3M™ High Temperature Protective Bags and Sheets 7260M are available in standard and custom sizes. 1.8 mil polypropylene construction provides...

- Protection against bleed through of solvents and paints
- Reliable performance in bake cycles up to 315°F (157°C)
- Compatibility with all paint systems
- Resistance to paint flaking
- Translucency for accurate placement
- Softness to help prevent scratching to clear coats
- Reduced contamination associated with paper fibers
- Easy tearing along perforations or cutting of non-perforated sheets
- Conformability and soft draping for ease of handling
- Offset edge for easy opening

Custom and standard orders are shipped as rolls in special pallet packaging that keeps bags and sheets clean and lint-free.

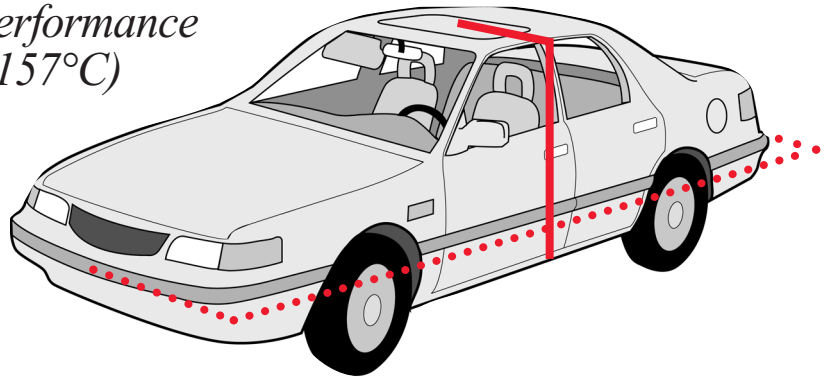


Measuring for Standard or Custom Sizes


Width: Measure from top center of vehicle to bottom of the rocker panel. Add 3" for overhang drape.

Length: Measure half the vehicle from the center of front bumper to the center of rear bumper. Add 8-10" for application ease


Bag and Sheet Styles

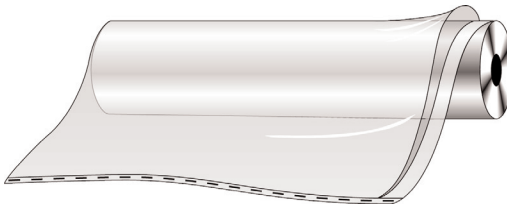

- Centerfold bags
- Center slit bags (with opening moved to centerline)

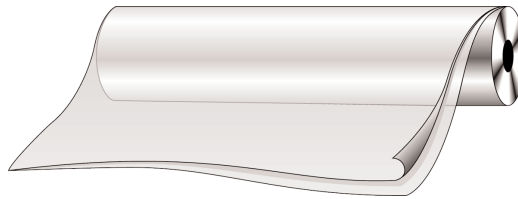

- Centerfold perforated sheets
- Centerfold sheeting roll

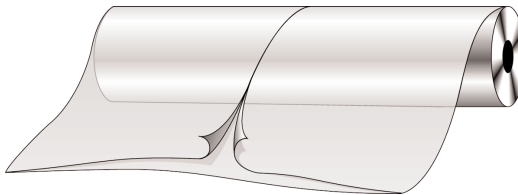

- Center slit perforated sheets
- Center slit sheeting roll

Bags are provided with heat seals, perforations, and opening slit.

Perforated sheets feature designated perforations and an easy opening slit.

Continuous sheeting is non-perforated with an opening slit for the full length.

3M™ High Temperature Protective Bags and Sheets for paint overspray

Custom Options for Bags and Sheets

- Mil thickness
 - Width
 - Perforation intervals (also placement of seals on bags)
 - Number of bags or perforated sheets per roll
 - Length of continuous sheeting rolls
 - Center slit rolls offer choice of slit opening wound to inside or outside,
- except when the option of folded rolls is selected.
- Folding to reduce the roll width by half. The slit opening is folded to the outside of the roll.

ORIENTATION OF SLIT		
	Center Fold	Center Slit
Rolls Wound Full Width	Wound out	Wound in or out
Folded Rolls	Folded out	Folded out

Application Ideas

- OEM paint repair bags for cars, minivans, SUV's, and light trucks
- "Reverse" 2-tone or repair masking for cars, minivans, SUV's, and light trucks
- Paint masking or protective covers for wheels, bumpers, windows, and other parts
- Truck cabs, bus and RV roof covering
- Aircraft fuselage drapes, wing and tail covering, propeller sleeves
- Paint masking or drapes for rail cars and locomotives

3M Crepe Masking Tape Compatibility

3M High Temperature Protective Bags and Sheets can be used with 3M Class I crepe masking tapes (2693 and 231) and Class II masking tapes (2380 and 2364). These four tapes offer choices for adhesion, line sharpness, clean removal, and temperature performance in bake cycle applications.

Product Use: All statements, technical information and recommendations contained in this document are based upon tests or experience that 3M believes are reliable. However, many factors beyond 3M's control can affect the use and performance of a 3M product in a particular application, including the conditions under which the product is used and the time and environmental conditions in which the product is expected to perform. Since these factors are uniquely within the user's knowledge and control, it is essential that the user evaluate the 3M product to determine whether it is fit for a particular purpose and suitable for the user's method of application. **Warranty and Limited Remedy:** Unless stated otherwise in 3M's product literature, packaging inserts or product packaging for individual products, 3M warrants that each 3M product meets the applicable specifications at the time 3M ships the product. Individual products may have additional or different warranties as stated on product literature, package inserts or product packages. 3M MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. User is responsible for determining whether the 3M product is fit for a particular purpose and suitable for user's application. If the 3M product is defective within the warranty period, your exclusive remedy and 3M's and seller's sole obligation will be, at 3M's option, to replace the product or refund the purchase price. **Limitation of Liability:** Except where prohibited by law, 3M and seller will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



Industrial Business Industrial Adhesives and Tapes Division

Building 21-1W-10
900 Bush Ave.
St. Paul, MN 55106
1-800-362-3550
www.3M.com/masking



Minimum 10% Post-Consumable Fiber

3M is a trademark of 3M
MCS 4040583
Printed in U.S.A.
© 3M 2004 70-0709-5345-3