

## ASSEMBLY & INSTALLATION

Please read carefully and save these instructions, as you may need them a later date.

### CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

### GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.


Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

## ASSEMBLY AND INSTALLATION

- Carefully unpack the fixture, lay out all parts on a clean surface.
- Attach mounting bracket (1) to outlet box (3) using two outlet box screws (2).
- Tie the ground wires (6) from fixture and from outlet box to the ground screw (5) on the mounting bracket. Connect the white fixture wire (10) from the fixture to the white wire (neutral wire 10) from the supply circuit. Connect the black fixture wire (9) from the fixture to the black wire (live wire 8) from the supply circuit.
- Cover the connections using provided wire connectors. Position wires back inside outlet box.
- Place the canopy (12) over the outlet box (3). Align the mounting screws so that they protrude through the appropriate holes on the canopy (12). Screw the lock nuts (13) onto the mounting screws.
- Place the cover A (14), the plastic washer (15) over the fixture nipple. Place the glass shade (16) and plastic washer (17), metal washer (18), cover A (19) over the fixture nipple and screw the finial (20) onto the fixture nipple until the glass shade (16) is held firmly to the fixture.
- Install the bulbs (not included 21). Use 60-watt max. candelabra-base bulbs.
- Turn on the power.

## ASSEMBLY AND INSTALLATION (CONT.)

### INSTALLATION IS NOW COMPLETED

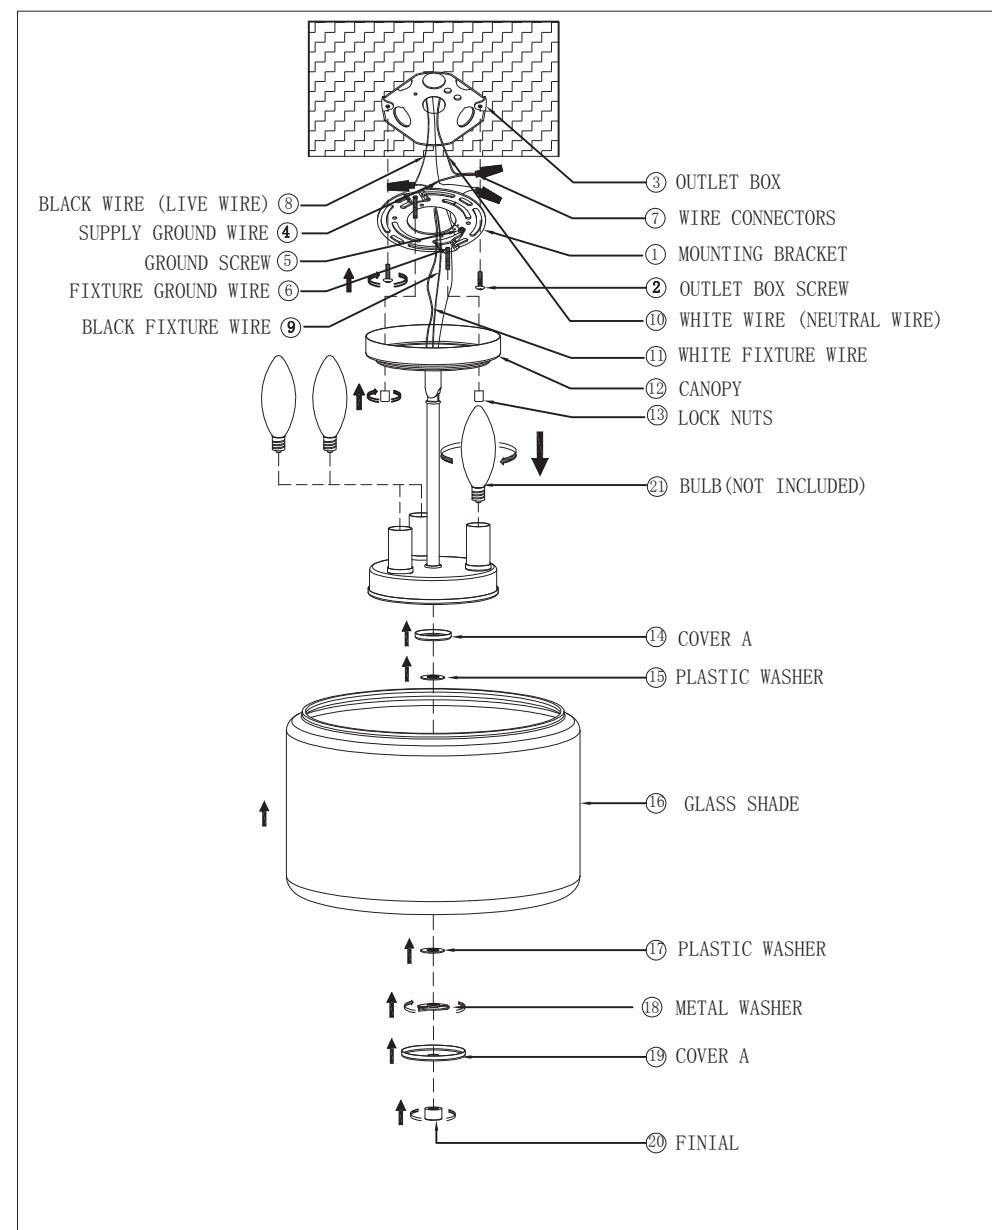

ITEM NO.: 46923