
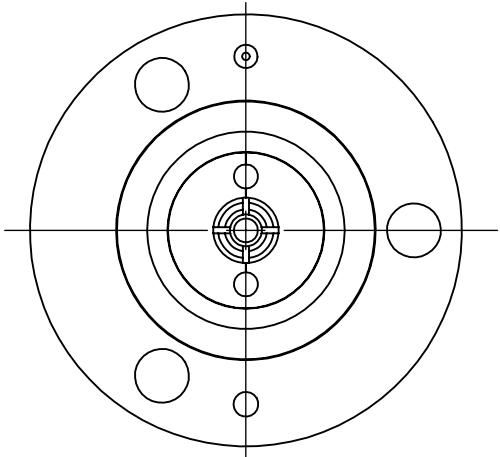
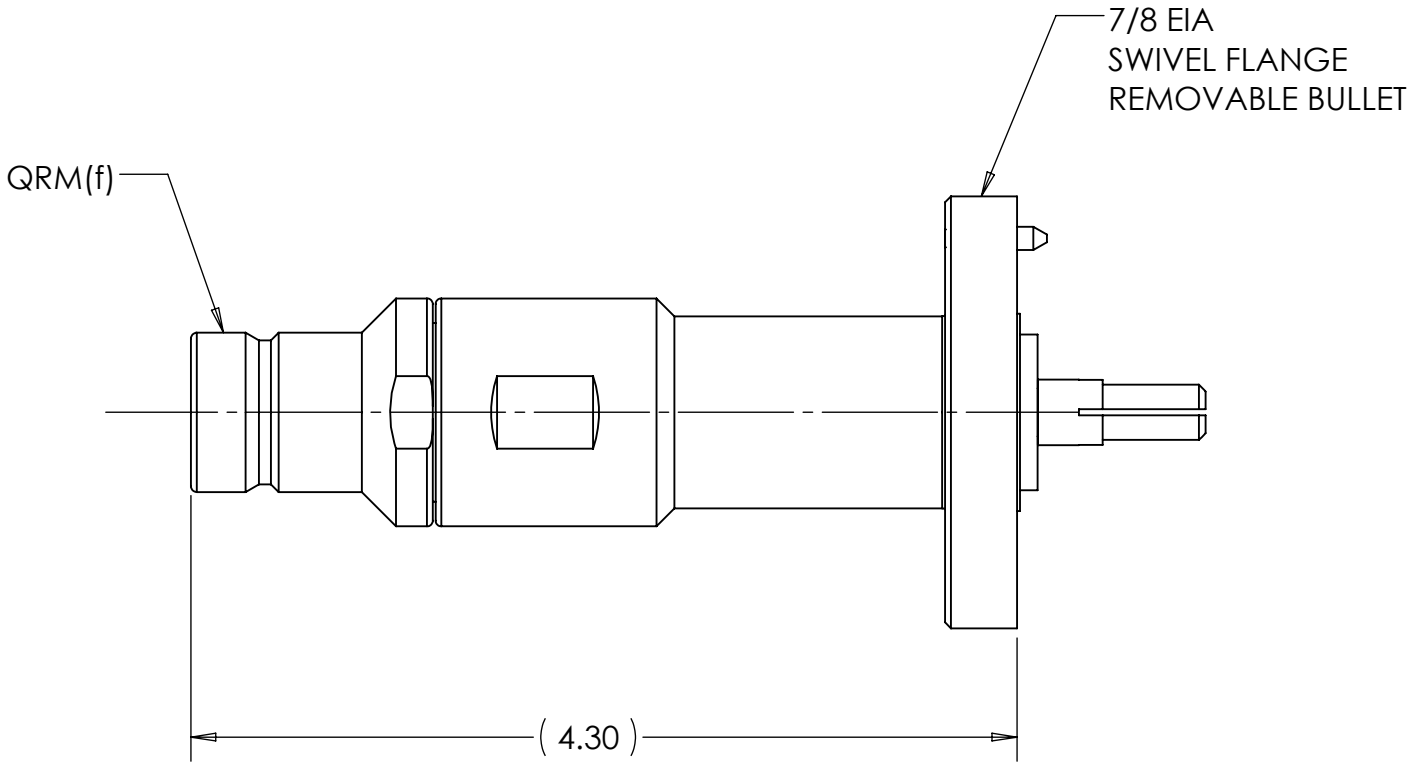


This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	04/29/14	AM

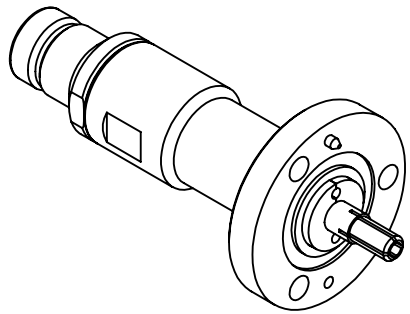

ENGINEERING DATA



ELECTRICAL:
IMPEDANCE: 50 OHMS NOMINAL
FREQUENCY RANGE: DC to 1GHz

MECHANICAL:
INTERFACE: 7/8 EIA per EIA RS-225
QRM(f) per TRU STANDARD

MATERIAL:
CONTACTS: BRASS & BERYLLIUM COPPER
INSULATORS: PTFE
BODIES: BRASS

FINISH:
CONTACTS: SILVER PLATED
BODIES: NICKEL PLATED

- NOTES:
- UNLESS OTHERWISE SPECIFIED; ALL DIMENSIONS ARE FOR REFERENCE ONLY.
 - HARDWARE INCLUDED BUT NOT SHOWN
 - 3 HEX HD BOLTS (1/4-20)
 - 3 HEX NUTS (1/4-20)
 - 6 SPLIT WASHERS (1/4)
 - 1 O-RING

MATERIAL	DO NOT SCALE DRAWING		DRAWN TE	DATE 04/18/14	 TRU Corporation 245 Lynnfield St, Peabody, MA 01960 <small>EXPERIENCE. TRU INNOVATION.</small>	
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONS: ± 1/64 .XX : ± .01 .XXX: ± .005 ANGLES: ± 1/2° MACHINED SURFACES: 63/√	ENG APPR. TE	DATE 04/22/14			
		MFG APPR.	DATE	TITLE: CONNECTOR, COAXIAL 7/8 EIA to QRM(f) ADAPTER		
		OTHER APPR. AM	DATE 04/22/14			
COMMENTS:		THIRD ANGLE PROJECTION 		SIZE B	DWG. NO. TRU-12669	REV -
				CAGE CODE: 92180		SCALE: 1:1
surface area: sq inch		weight: 0.98 lbs				