




PRIMOthane[®]

Polyurethane Floor Scrubber Squeegees

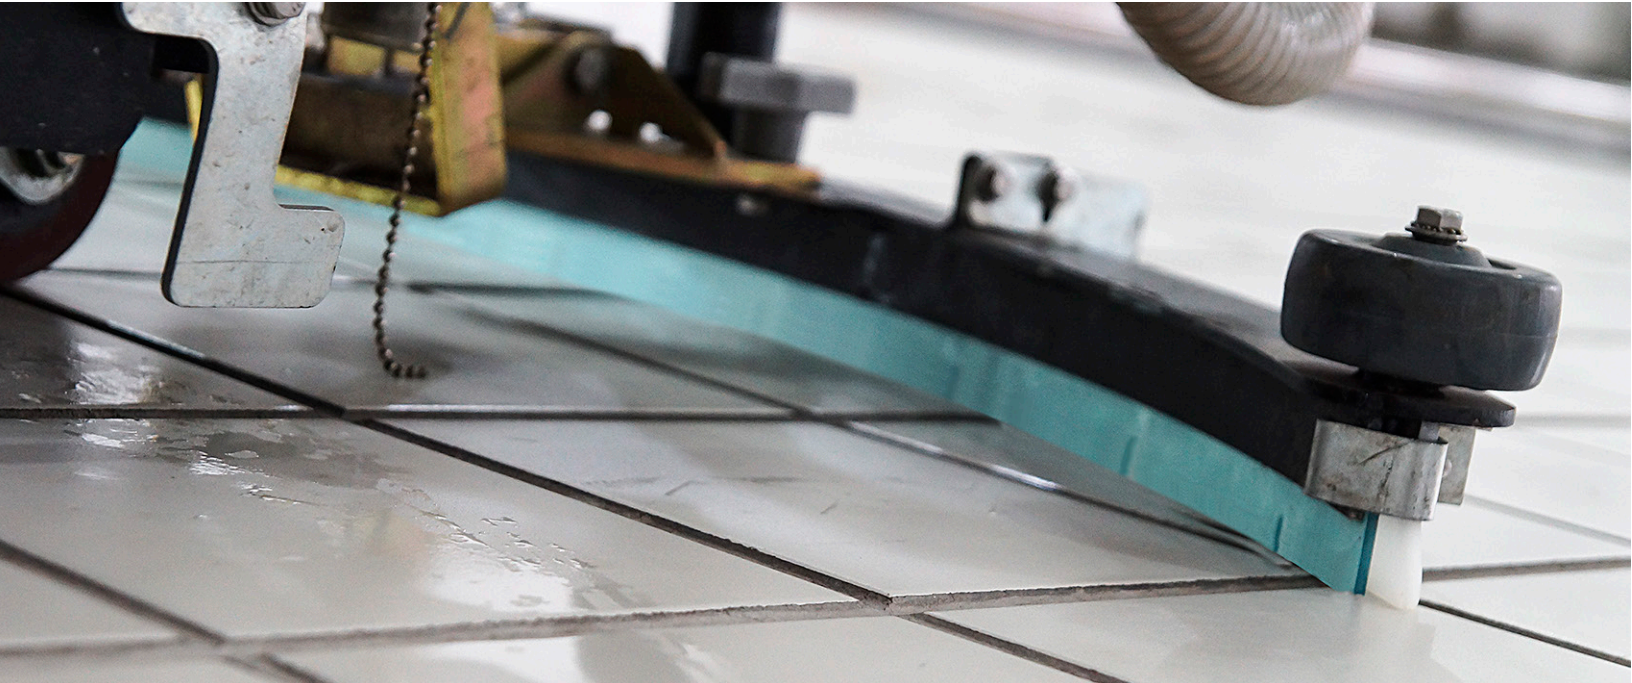

Squeegee Use and Care Instructions

Primothane is a synthetic polymer that has been specially formulated with properties ideal for use in cleaning rubber floors, oily floors, anti-slip floors and for low-water cleaning conditions.

Shelf Life: 12 months from Midwest Rubber ship date

Working Temperature: 50° to 104°F (10° to 40°C)

Packaging: Tightly sealed box or black plastic bag

Storage: Cool, dry, dark and well-ventilated area. When equipment is not in use, raise squeegee off the floor.

Avoid: Direct sunlight, sharp edges, applying weight tension or stress, contact with ABS or PVC plastics, strong acids and alkalis.

Tips: Sweep floor before cleaning and rinse squeegee with water after use.



Midwest Rubber Service and Supply Co.
14307 28th Place N
Minneapolis, MN 55447
Tel. +01 763.559.2551
Fax. +01 763.559.4429
www.midwestrubber.com