

- 1 Removable, Reversible, and Lockable Front Door
- 2 Removable and Lockable Side Panels (2)
- 3 Top/Bottom Covers
- 4 Vents for Optional Fan Kit (4)
- 5 Cable Access with Removable Covers (2)
- 6 Reserved Holes for Optional Caster Kit
- 7 Back Panel
- 8 Depth-adjustable Rack Angles with Dual Mounting Holes (4)
- 9 Keys (2)

Hardware and Accessories

User's Manual	Expansion Bolt (4)	#12-24 Screw, Silver (30)

M6 Phillips-Head Screw, Black (30)	M6 Cage Nut (30)	Cup Washer (30)

Specifications

Model	CR6U61001
Rack Height	6U
Max. Mounting Depth	22.3 in. (567 mm)
Weight Capacity-Stationary	132.3 lbs. (60 kg)
Unit Dimensions (WxHxD)	23.6 x 14.6 x 23.6 in. (600 x 372 x 600 mm)
Shipping Dimensions (WxHxD)	26.2 x 17.1 x 26.2 in. (665 x 435 x 665 mm)
Unit Weight	37.2 lbs. (16.9 kg)
Shipping Weight	41.0 lbs. (18.6 kg)
Approvals	DIN41491, DIN41494, EIA/ECA-310-E, IEC 60297-3-100, RoHS

#All specifications are subject to change without notice.


- Ships fully assembled.
- Versatile, space-efficient wall mount equipment protection maximizes floor space.
- Hexagonally perforated front door and side panels provide optimal ventilation.
- Reversible front door allows opening from left or right to meet different installation requirements.
- Vertical adjustable rack angles can be adjusted in 3/4" increments for mounting depth requirements up to 22".




Hexagonal holes, compared with round holes, allow more efficient airflow and therefore optimize ventilation.




Optional caster kit (including 4 casters) is available for mobility, allowing you to easily move and adjust the position of your rack products.

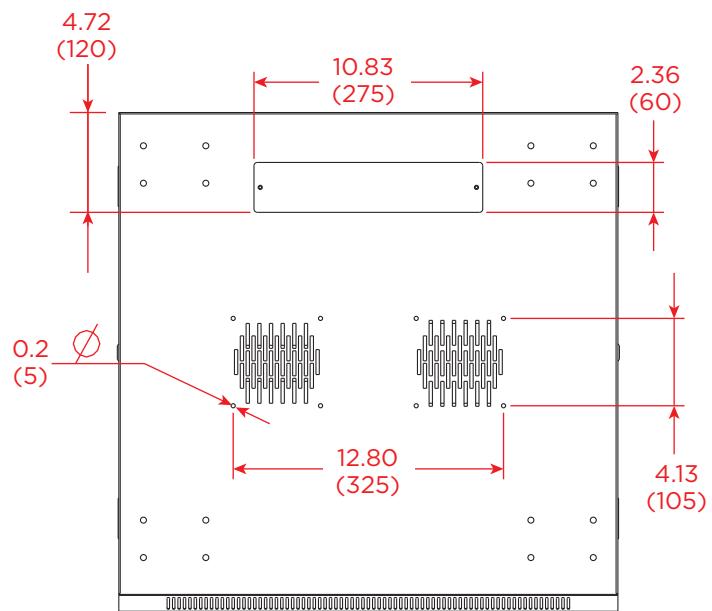


TOP/BOTTOM VIEW

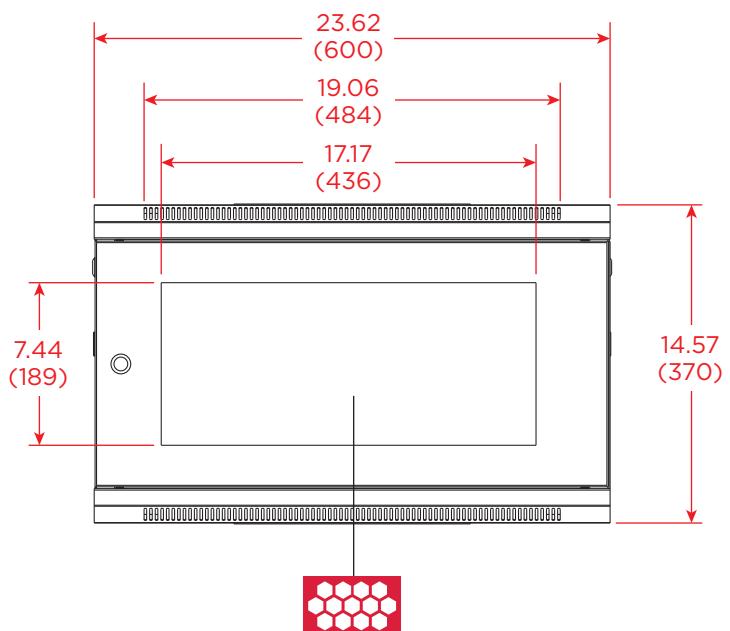

FRONT VIEW

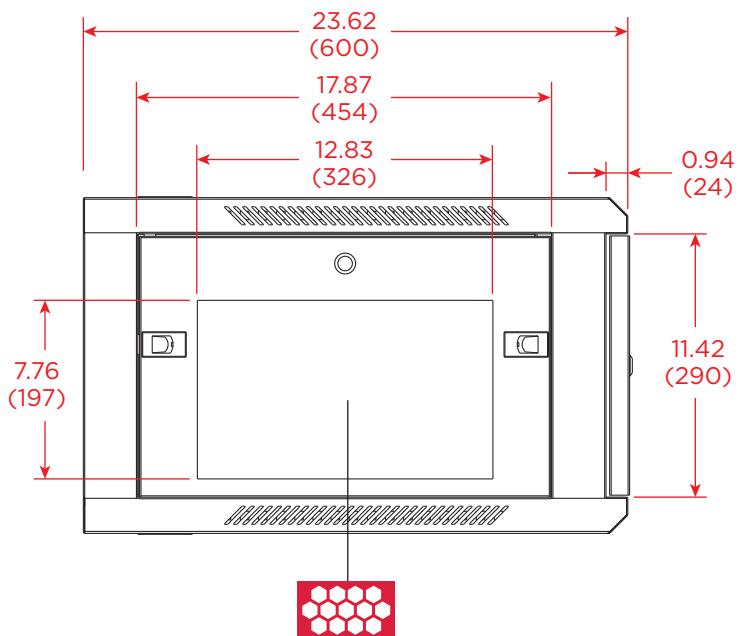


SIDE VIEW

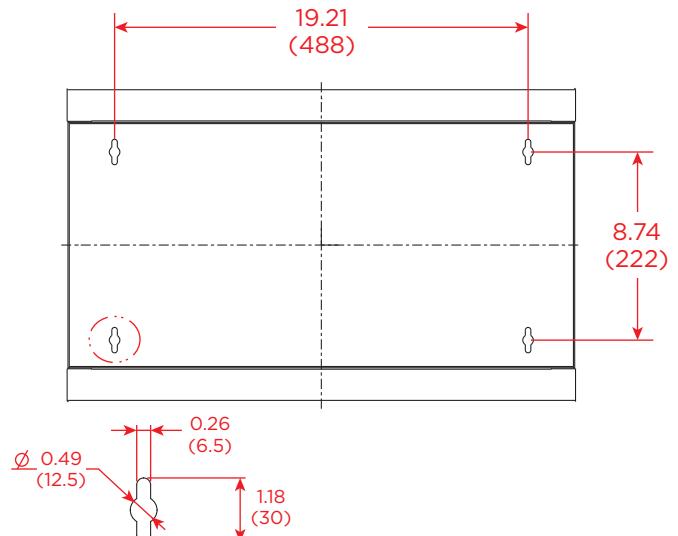


REAR VIEW

Dimensions: INCHES (mm)

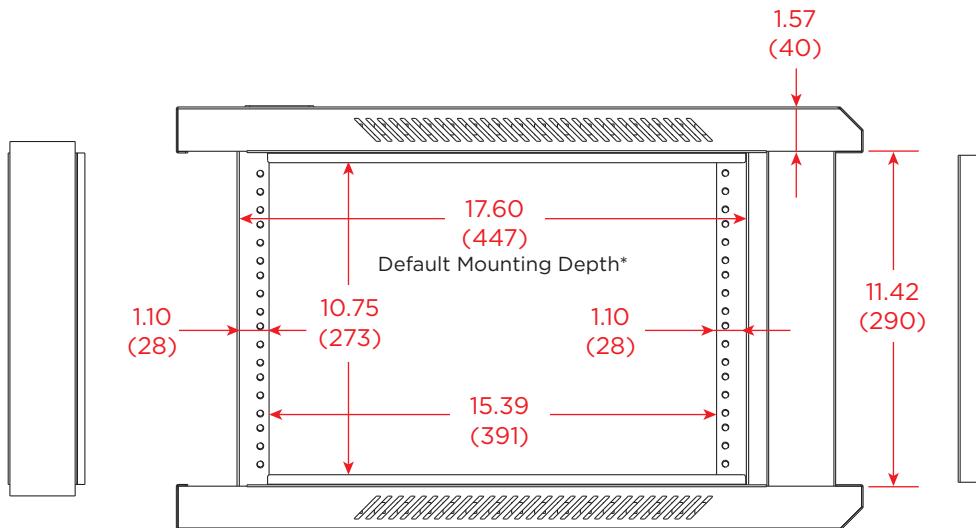

*Adjustable Mounting Depth: 1.9" - 22.3" (47 - 567 mm)

SIDE VIEW W/O PANEL

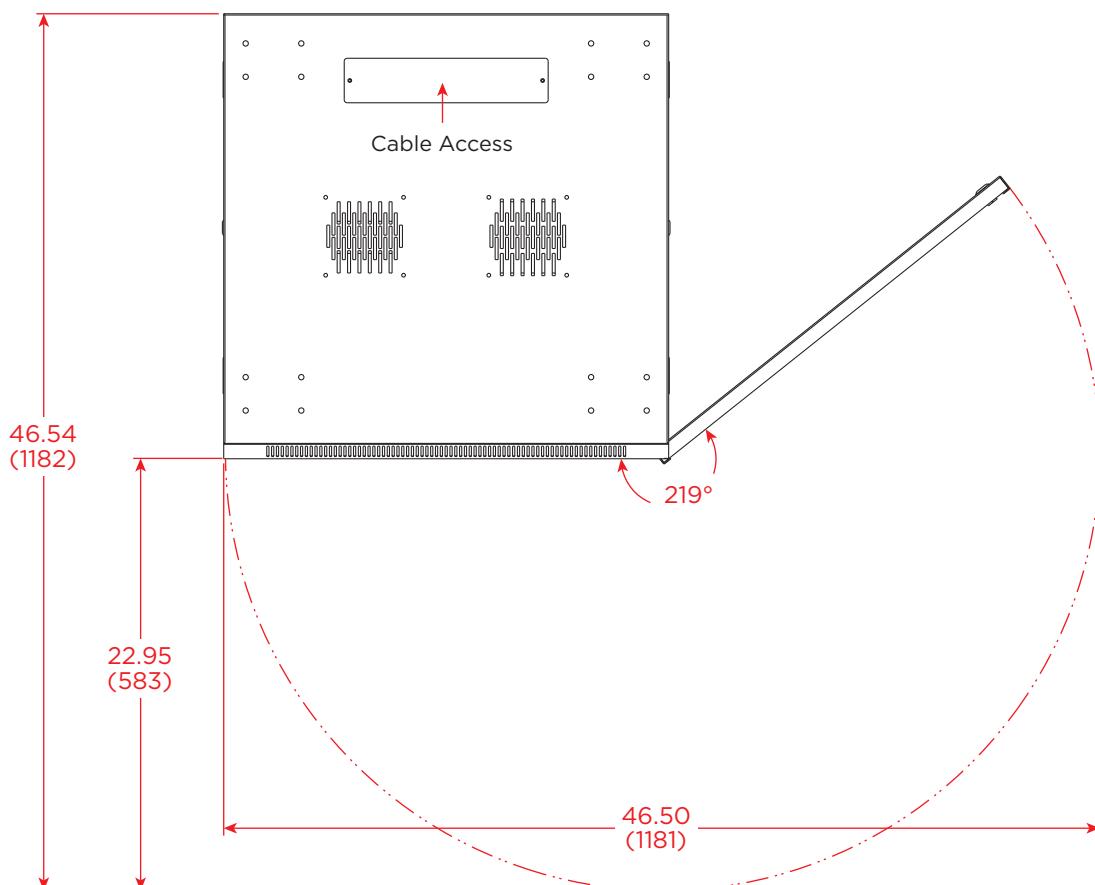

FRONT OPENING

Dimensions: INCHES (mm)

CyberPower®
Cyber Power Systems, Inc.
www.cyberpower.com

USA and Canada:
4241 12th Ave East, Suite 400
Shakopee, MN 55379
Toll-free: (877) 297-6937

All other regions:
Please visit our website for local contact information.