

This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

ENGINEERING DATA

ELECTRICAL:

FREQUENCY RANGE: DC TO 40 GHz  
VSWR MAX: 1.15:1

MECHANICAL:

INTERFACE PER IEEE 287

MATERIAL:

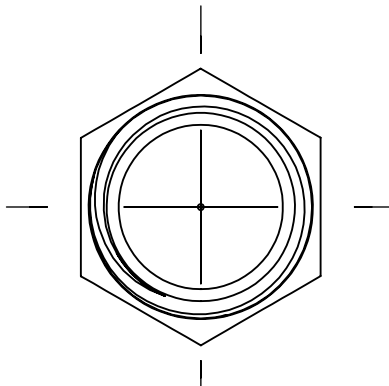
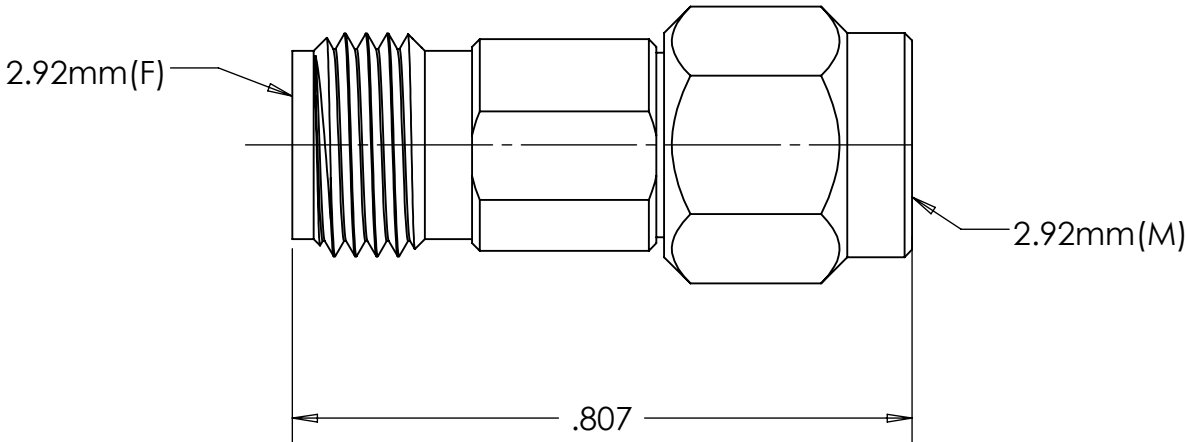
HOUSING/COUPLING NUT: STAINLESS STEEL  
CONTACTS: BERYLLIUM COPPER  
SUPPORT BEAD: PEI




FINISH:

HOUSING/COUPLING NUT: PASSIVATED  
CONTACTS: GOLD PLATED

NOTES:

1. ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.



MATERIAL		DO NOT SCALE DRAWING	DRAWN TRC	DATE 07/16/10	<div> <b>TRU CORPORATION</b> 245 LYNNFIELD STREET, PEABODY, MA 01960</div> <div>The Custom Interconnect Leader™</div>		
		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES	ENG APPR. TRC	DATE 07/21/10			
			MFG APPR. DF	DATE 07/21/10			
			OTHER APPR. AM	DATE 07/20/10			
COMMENTS:		TOLERANCES: FRACTIONS: ± 1/64 .XX : ±.01 .XXX: ±.005 ANGLES: ± 1/2° MACHINED SURFACES: <div></div>	THIRD ANGLE PROJECTION <div></div>		TITLE: CONNECTOR,COAXIAL 2.92MM(M) TO 2.92MM(F) ADAPTER		
					SIZE <b>B</b>	DWG. NO. TRU-11223	REV -
surface area: sq inch		weight: lbs	CAGE CODE: 92180			SCALE: 4:1	SHEET 1 OF 1