


This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	09/05/08	AM

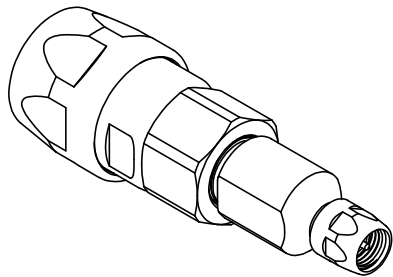

ENGINEERING DATA


ELECTRICAL:
IMPEDANCE: 50 OHMS NOMINAL
FREQUENCY RANGE: DC to 18GHz
VSWR MAX: 1.08:1



MECHANICAL:
INTERFACE: PER MIL-STD-348

MATERIAL:
CONTACTS: BERYLLIUM COPPER, BRASS
BODIES: STAINLESS STEEL, BRASS
INSULATORS: NORYL, TPX
COUPLING NUTS: STAINLESS STEEL

FINISH:
CONTACTS: GOLD PLATED
BODIES: GOLD PLATED
COUPLING NUTS: PASSIVATED

ENVIRONMENTAL:
OPERATING TEMP.: 0 °C to 85 °C

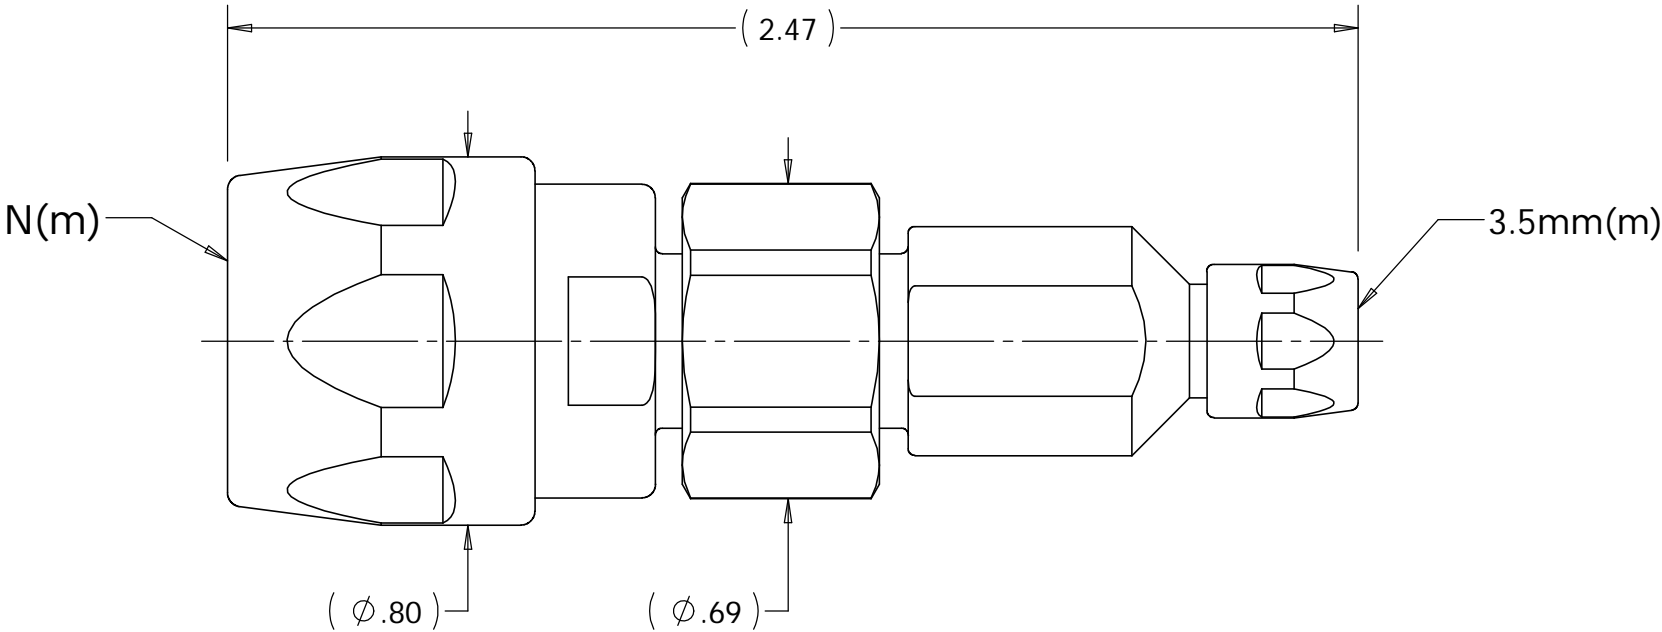

MATERIAL	DO NOT SCALE DRAWING	DRAWN AM	DATE 08/08/08	<div> TRU CORPORATION 245 LYNNFIELD STREET, PEABODY, MA 01960 <small>The Custom Interconnect Leader™</small></div>			
		ENG APPR. AM	DATE 08/08/08				
		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONS: ±1/64 .XX : ±.01 .XXX: ±.005 ANGLES: ±1/2° MACHINED SURFACES: 63/	MFG APPR.	DATE	TITLE: N(m) to 3.5mm(m) ADAPTER		
			OTHER APPR.	DATE			
COMMENTS:		THIRD ANGLE PROJECTION 		SIZE B	DWG. NO. TRU-11119-GGX	REV -	
				CAGE CODE: 92180		SCALE: 5:2	SHEET 1 OF 1
surface area: sq inch		weight: lbs					