

# CyberPower

## OL2K2RTHD SMART APP ONLINE UPS



### Prevent business interruptions and safeguard mission-critical enterprise network equipment.

The OL2K2RTHD features double-conversion topology for seamless power protection, individual outlet control, and an optional RMCARD205.

For monitoring, this UPS offers a new state-of-the-art, multi-function, color TFT LCD screen that is simple to set up and easy to use. The color-coded alerts provide clear status of the UPS and the screen orientation rotates automatically when placed into a tower configuration.

The OL2K2RTHD ensures maximum efficiency and capacity output with a Power Factor rating (PF) of 0.82. The energy-saving GreenPower UPS™ ECO Mode enables more than 96% efficiency while reducing power consumption and thermal dissipation.

The optional BP36VL2U01 Extended Battery Module (EBM) expands runtime and up to ten EBM's can be connected in a daisy-chain to the UPS for more backup power. Plus, it's backed by our three-year warranty (including batteries) and a \$400,000 Connected Equipment Guarantee.

#### TYPICAL APPLICATIONS

- Core Network Equipment
- Hyperconverged Infrastructure (HCI)
- Server Rooms
- Server Virtualization Infrastructures
- Storage Systems
- VoIP Infrastructure
- Enterprise Servers
- Corporate Servers

#### FEATURES

- Capacity: 2200 VA / 1800 W
- High Density: 2U Size
- Power Factor (PF): 0.82
- Topology: Double-Conversion
- Waveform: Sine Wave
- Output: 100, 110, 115, 120, 125 Vac User Configurable +/-2%
- Runtime (half/full): 10.3 minutes / 3.1 minutes
- Plug type & cord: NEMA 5-20P
- Outlet types: 7 x 6 NEMA 5-20R & 1 NEMA L5-20R, Switchable
- Communication ports: USB, Serial, SNMP, EPO
- Management software: PowerPanel® Business Edition
- Remote management: Yes, RMCARD205 Optional
- Warranty: Three-Year

### SPECIFICATIONS

| GENERAL               |                          |
|-----------------------|--------------------------|
| Energy Saving         | ECO Mode Efficiency >96% |
| Energy Star Certified | Yes                      |
| UPS Topology          | Online Double Conversion |
| INPUT                 |                          |
| Circuit Breaker       | 20 A                     |
| Cold Start            | Yes                      |
| Cord Length           | 10 ft. (3.0 m)           |
| Input Frequency Range | 40 Hz - 70 Hz            |

| INPUT - CONT.         |  |
|-----------------------|--|
| Input Plug Type       | NEMA 5-20P   |
| Input Power Factor    | 0.99   |
| Input Voltage Range   | 60 VAC - 69 VAC for 0-60% Load<br>70 VAC - 79 VAC for 0-70% Load<br>80 VAC - 89 VAC for 0-80% Load<br>90 VAC - 95 VAC for 0-90% Load |
| Nominal Input Voltage | 100 - 125 VAC  |

# OL2K2RTHD SMART APP ONLINE UPS



## SPECIFICATIONS CONT.

| OUTPUT                              |   |
|-------------------------------------|---|
| Bypass                              | Internal Bypass (Automatic and Manual)                                    |
| Crest Factor                        | 3 : 1   |
| ECO Mode Voltage Regulation         | +/-10%, +/-15% (Configurable)   |
| Harmonic Distortion                 | < 3% at Linear Load<br>< 5% at Non-Linear Load                            |
| Maintenance Bypass                  | Yes   |
| On Battery Frequency                | 50/60 Hz +/-0.25Hz (auto-sensing or configurable)                         |
| On Battery Voltage                  | 100 / 110 / 115 / 120 / 125 VAC +/-2% (configurable)                      |
| On Battery Waveform                 | Sine Wave   |
| Outlet Type                         | 6 x NEMA 5-20R<br>1 x NEMA L5-20R   |
| Outlets - Total                     | 7   |
| Output Power Factor                 | 0.82  |
| Short Circuit Protection            | UPS Output Cut Off Immediately or Input Fuse / Circuit Breaker Protection |
| Typical Transfer Time               | 0 ms  |
| VA                                  | 2200 VA   |
| Watts                               | 1800 W  |
| BATTERY                             |   |
| Battery Equalization Technology     | Yes   |
| Battery Quantity                    | 3   |
| Battery Size                        | 12 V / 9 Ah   |
| Battery Type                        | Sealed Lead Acid  |
| Extended Battery Module             | BP36VL2U01  |
| Hot-Swappable                       | Yes   |
| Replacement Battery                 | 1 x RB1290X3C   |
| Runtime at Full Load                | 3.1 min   |
| Runtime at Half Load                | 10.3 min  |
| Smart Battery Management (SMB) Mode | Yes   |
| Typical Recharge Time               | 4 hours (0% to 90% charged)   |
| User-Replaceable Battery            | Yes   |


| SURGE PROTECTION & FILTERING       |  |
|------------------------------------|--|
| EMI/RFI Filtration                 | Yes  |
| Surge Suppression                  | 710 J  |
| MANAGEMENT & COMMUNICATIONS        |  |
| Audible Alarms                     | Battery Mode, Battery Low, Overload, UPS Fault |
| Dry Contacts                       | Yes  |
| Emergency Power Off (EPO) Port     | Yes  |
| HID Compliant USB Port             | Yes  |
| LCD                                | Multifunction LCD                              |
| LED Indicators                     | Power On (white)                               |
| Management Cable                   | USB Cable                                      |
| Removable LCD Control Panel Option | No   |
| Rotatable LCD Control Panel Option | Yes  |
| Serial Port                        | 1 Serial                                       |
| SNMP / HTTP Remote Monitoring      | Yes - with optional RMCARD205                  |
| Software                           | PowerPanel® Business Edition                   |
| PHYSICAL                           |  |
| Chassis Color                      | Black  |
| Form Factor                        | Rack / Tower                                   |
| Front Panel                        | Black  |
| Material of Construction           | Metal  |
| Mounting Hardware                  | Yes  |
| Rack Height                        | 2U   |

OL2K2RTHD

SMART APP ONLINE UPS

SPECIFICATIONS CONT.

| PHYSICAL DIMENSIONS                            |                                       |
|--|---------------------------------------|
| Physical Dimensions - Width/Height/Depth (cm)  | 43.31 x 8.64 x 38.0 cm                |
| Physical Dimensions - Width/Height/Depth (mm)  | 433 x 86 x 380 mm                     |
| Physical Dimensions - Width/Height/Depth (in.) | 17.05 x 3.4 x 14.96 in.               |
| Weight (kg)                                    | 17.5 kg                               |
| Weight (lb)                                    | 38.58 lbs.                            |
| SHIPPING DIMENSIONS                            |                                       |
| Shipping Dimensions - Width/Height/Depth (cm)  | 56.01 x 24.0 x 48.01 cm               |
| Shipping Dimensions - Width/Height/Depth (mm)  | 560.07 x 240.03 x 480.06 mm           |
| Shipping Dimensions - Width/Height/Depth (in.) | 22.05 x 9.45 x 18.90 in.              |
| Shipping Weight (kg)                           | 21.3 kg                               |
| Shipping Weight (lbs.)                         | 46.96 lbs.                            |
| ENVIRONMENTAL                                  |                                       |
| Audible noise at 1m from surface of unit       | 24.2 dBA to 57.1 dBA (0 to 100% load) |
| ECO Mode Thermal Dissipation                   | 176 BTU/hr                            |
| Online Thermal Dissipation                     | 497 BTU/hr                            |
| Operating Elevation                            | 0 - 9,843 ft (0 - 3,000 m)            |
| Operating Relative Humidity                    | 0% to 90% non-condensing              |
| Operating Temperature                          | 32 °F to 104 °F (0 °C to 40 °C)       |
| Storage Elevation                              | 0 - 49,213 ft (0 - 14,999 m)          |
| Storage Relative Humidity                      | 0% to 95% non-condensing              |
| Storage Temperature                            | 5 °F to 113 °F (-15 °C to 45 °C)      |

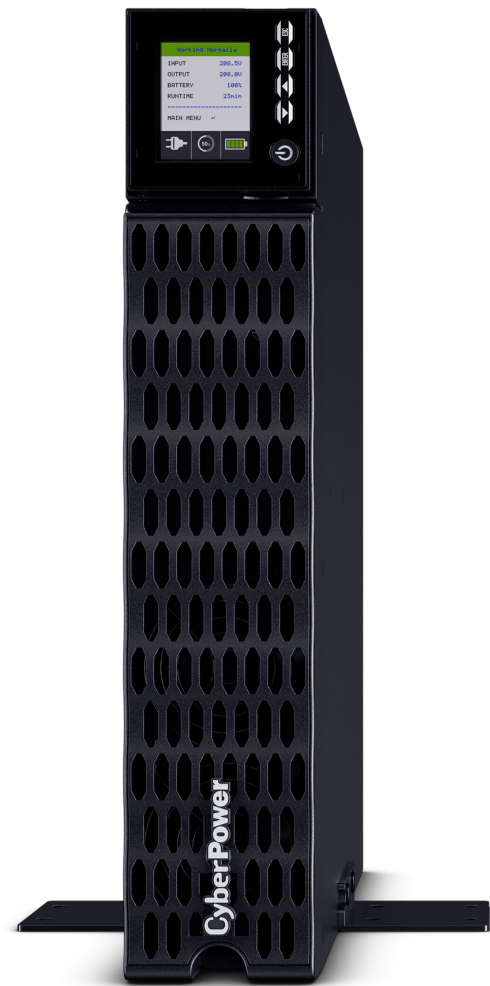

| CERTIFICATIONS                |   |
|-------------------------------|---|
| Environmental                 | RoHS Compliant                                      |
| Safety                        | UL1778<br>CSA C22.2 No.107.3<br>FCC Part 15 Class A |
| WARRANTY                      |   |
| CEG Amount                    | \$400,000   |
| Connected Equipment Guarantee | Lifetime  |
| Extended Warranty Option      | WEXT5YR-U4B   |
| Product Warranty              | 3-Year Limited                                      |