


DWG. NO. 512-900-0750N			
REV	DESCRIPTION	BY DATE	APPD
B	ECR 7278	2/22/02	WIN

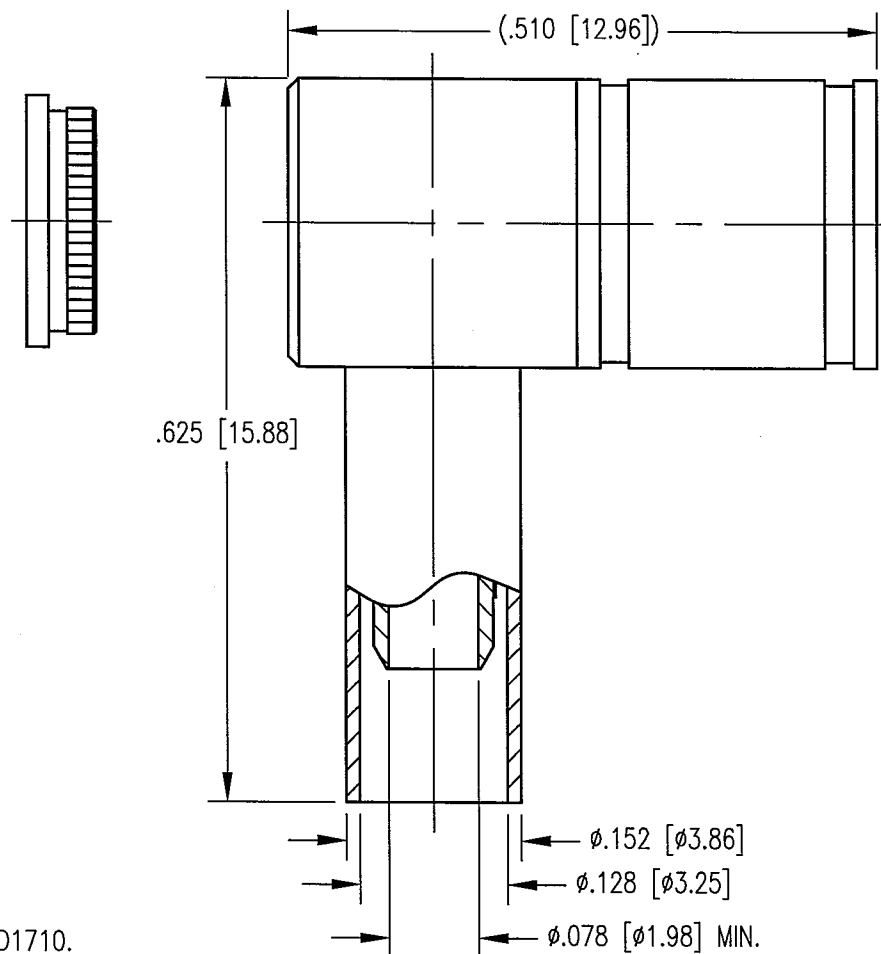

NOTES:

1. MATERIALS:

INSULATOR: TEFLON PER ASTM D1710.
 SPRING RING: BERYLLIUM COPPER PER ASTM B194.
 CENTER CONTACT: BERYLLIUM COPPER PER ASTM B196
 FERRULE, CAP, BODIES & SHROUD: BRASS PER ASTM B16

2. FINISHES:

CENTER CONTACT: .000030 MIN. GOLD PER MIL-G-45204
 OVER .000050 NICKEL PER QQ-N-290.
 FERRULE, CAP, BODIES & SHROUD: NICKEL PLATE PER QQ-N-290

3. ELECTRICAL:

IMPEDANCE: 50 OHM
 FREQUENCY RANGE: 0 - 4.0 GHz.
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS

4. FOR USE WITH HARTING 401.01.01 CABLE OR EQUIVALENT..

5. FOR CABLING PROCEDURE USE 9-06 WITH TRIMMING DIMENSIONS SHOWN.

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM]				NORTHROP GRUMMAN			
TOLERANCES: DECIMALS .XX ± .01 [0.254] .XXX ± .005 [0.127] ANGLES ± 2°				Winchester Electronics 400 Park Road Watertown, CT 06795			
CUSTOMER DRAWING				TITLE SMB RIGHT ANGLE CABLE PLUG			
DRAWN JMC	DATE 8/28/98	CHECKED JED	DATE 8/28/98	A 512-900-0750N			
APPROVED KJT	DATE 8/28/98	APPROVED KJT	DATE 8/28/98	SHT. 1	OF 1	REV. B	