



Specifications

Length:	6"
	152 mm
Width:	6"
	152 mm
Height:	7"
	178 mm

PSSA


Pedestal Stanchion Mount

HIGHLIGHTS



- Cast aluminum 7" pedestal stanchion mount
- Designed for a single lighting fixture
- Mounts over recessed splice box or conduit stub-out
- Top mounting hole accepts threaded knuckle or yoke mount lighting fixture
- Front splice access cover and gasket provided for fixture wiring compartment

DIMENSIONS

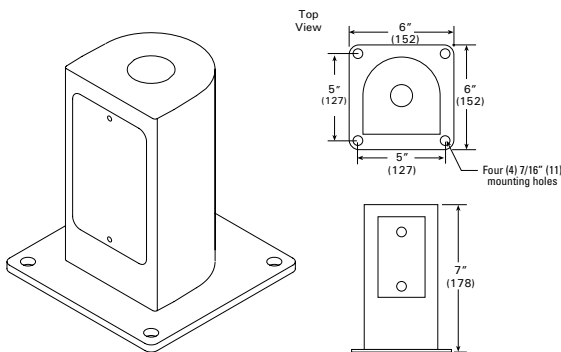

ORDERING INFORMATION

EXAMPLE: PSSA 109C BZ

Model	Fixture Mounting ¹	Cord Seal	Finish
PSSA 7" Pedestal Stanchion Mount	12C Accepts 1/2" NPT threaded knuckle 78C 7/8" thru hole for 1/2" NPT 109C 1.09" thru hole for 3/4" NPT LSC₂ Large Stainless Cord Seal SC₃ Stainless Cord Seal TC 2 3/8" Tenon Mount 38TL Taper-lock for use with Tapestry fixtures 78ADP Accepts 4750L Knuckle Adaptor	12CS 1/2" cord seal used with 4750L	BL Black BZ Bronze DDB Dark Bronze DNA Natural Aluminum GN Green GR Gray SN Sand STG Steel Gray TVG Terra Verde Green WH White CF Custom _Z⁴ Zinc Undercoat (i.e. BLZ) WH White CF Custom RALTB RAL Paint Finishes Note: RALTB for pricing only, replace with applicable RAL call out when ready to order. See the RALBROCHURE for available options. It is recommended only use textured paint for Hydrel fixtures.

Notes:

- See individual fixture sheets for mounting.
- LSC available for large yoke mounted fixtures (e.g. Hydrel Series 8200).
- SC available for small yoke mounted fixtures (e.g. Hydrel Series 4600YM, 8100).
- Add Zinc undercoat for harsh environments.

MOUNTING

Fixture Mounting	Size	Fixture that uses this mounting ¹ :
12C	1/2" NPT	4600 KM
78C	7/8" thru hole	Cedar, Aspen, Palm, Pine, Alder
LSC	Large Cord Seal	8200 YM
SC or SCM	Cord Seal	4600 YM, 8100 YM
TC	2-3/8" tenon	8100 & 8200 YMTM Mounting
38TL	3/8" taper lock	TPS1, TPS2
78ADP		accepts 4750L Knuckle Adaptor

Notes:

- Not all fixtures on this chart are available with all accessories, consult the fixture mounting column to see which options are available on this mounting.

SPECIFICATIONS AND FEATURES

MATERIAL: Heavy wall cast aluminum.

MOUNTING: Pedestal stanchion mounts over recessed splice box or conduit stub-out. Attaches to surface with four (4) 3/8" (10mm) fasteners (by others). Top mounting hole accepts threaded knuckle or yoke mount lighting fixture. Top 2 3/8" tenon mount also available.

ELECTRICAL: Front splice access cover and gasket provided for fixture wiring compartment.

FASTENERS: Stainless Steel.

FINISH: Super durable Polyester TGIC powder coat finish (standard). Optional Zinc undercoat for harsh environments.

BUY AMERICAN ACT: This product is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT regulations. Please refer to www.acuitybrands.com/buy-american for additional information.

NOTE: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.