
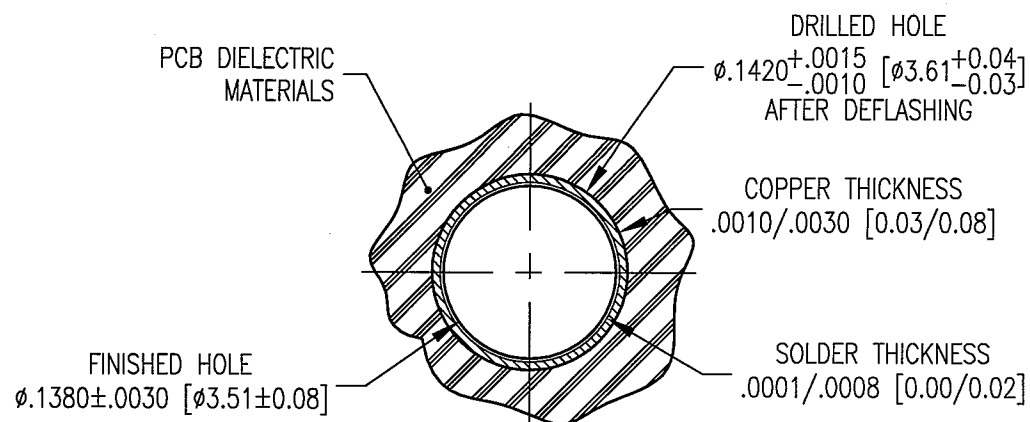


DWG. NO.		221-010-0060G	
REV	DESCRIPTION	BY DATE	APPD
A	ECR 7437	8/9/02	JEM

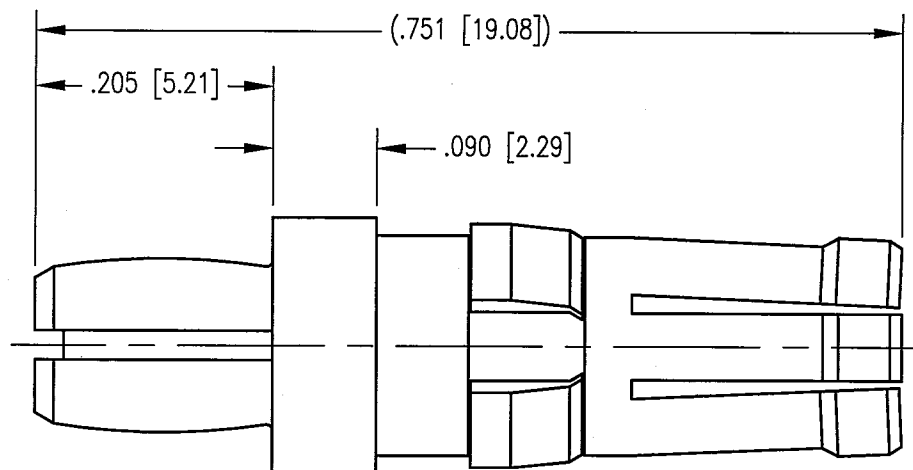

RECOMMENDED MOUNTING HOLE

NOTES:

1. MATERIALS:

BODY: PHOSPHOR BRONZE PER ASTM D139-90 ALLOY C54400 BZ4 (C.D.A. 544)
CLIP RING: BERYLLIUM COPPER PER ASTM B194
INSERT: SILICONE RUBBER PER ZZ-R-765

2. FINISH:

BODY: .000030 MIN. GOLD PER MIL-G-45204 OVER
.000050 MIN. NICKEL PER QQ-N-290
CLIP RING: .000100 MIN. NICKEL PER QQ-N-290 OVER
COPPER FLASH

3. MECHANICAL:

MAX. INSERTION FORCE: 75 LBS.
MIN. RETENTION FORCE: 20 LBS.

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM]		NORTHROP GRUMMAN	
TOLERANCES: DECIMALS .XX ± .01 [0.254] .XXX ± .005 [0.127] ANGLES ± 2°		Winchester Electronics 400 Park Road Watertown, CT 06795	
CUSTOMER DRAWING		TITLE COMPLIANT PIN HIGH POWER RECEPTACLE	
DRAWN JWH	DATE 8/2/02	CHECKED RH	DATE 8/8/02
APPROVED JEM	DATE 8/8/02	APPROVED KJT	DATE 8/8/02
A 221-010-0060G		SHT. 1 OF 1	REV. A