


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

SD

2065-12-9

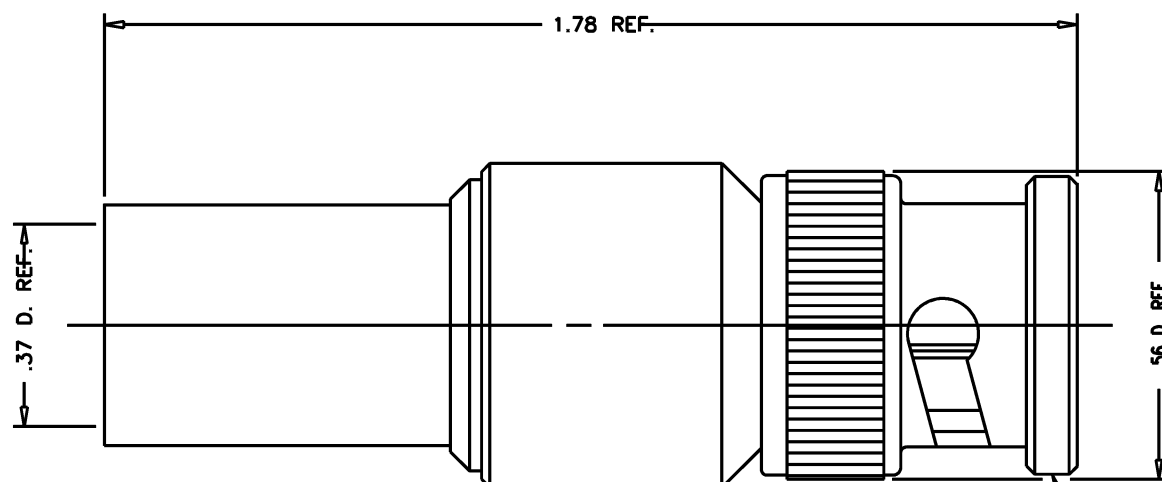

NOTES:

- FOR USE WITH COMSCOPE 7530 CABLE.
- FOR CABLING INSTRUCTIONS SEE 3-661-3.
- FOR CRIMPING USE DIE KTH-2260
- INTERFACE PER KINGS ES-17, FIG. 6.
- CENTER CONTACT TO BE SUPPLIED UNASSEMBLED.
- MATERIALS:
INSULATOR: TEFLON, ASTM-D-1457
K-GRIP SLEEVE: COM. BRONZE, ALLOY 220
GASKET: SILICONE RUBBER, ZZ-R-765
SPRING WASHER: BER. COPPER, ASTM-B-196
ALL OTHER METAL PARTS: BRASS, ASTM-B16
- FINISHES:
SPRING WASHER: SILVER PLATE, QQ-S-365
CENTER CONTACT: HARD GOLD PLATE, PER MIL-G-45204
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
- ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 75 OHMS
WORKING VOLTAGE: 500 VRMS
FREQUENCY RANGE: DC TO 3 GHz

STAMP: KINGS 2065-12-9
YR WK (DATE CODE)

SD

REVISIONS

ISSUE	CHANGES
0	ER 37769 DCT 01/12/99
1	CN 37783 E DCT 01/28/99
2	CN 37790 A DCT 03/02/99
3	CN 37933 D TML 11/09/99
4	CN 38011 D HVN 05/23/00
5	CN 38495 E TML 02/01/02
6	CN 40072 C PMC 09/17/07

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

PLUG, 75 BNC

DRAWN	HVN	DATE	01/12/99
DESIGN	DCT	DATE	01/11/99
APPR.	DCT	DATE	01/12/99

A Winchester Electronics Company

2065-12-9